NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-83536/2
AMENDMENT 4
10 July 1999
SUPERSEDING
AMENDMENT 3
21 August 1998

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This amendment forms a part of MIL-PRF-83536/2, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 2

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 4

FIGURE 1, track mount A, side view, delete and substitute:

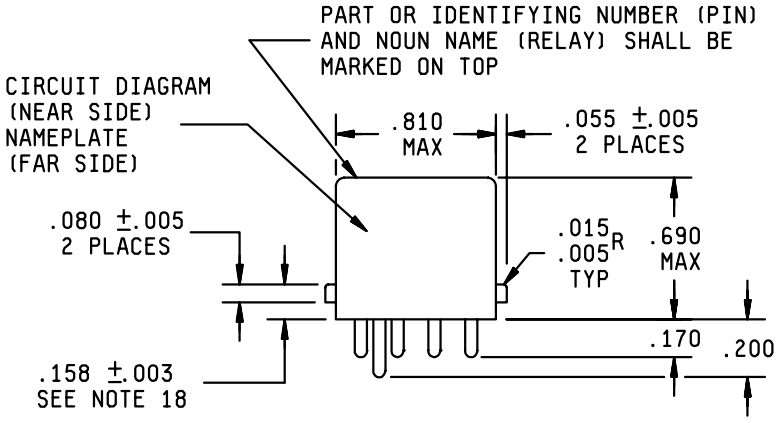

PAGE 5

* FIGURE 1, delete “GASKET SILICONE RUBBER IN ACCORDANCE WITH McDONNELL DOUGLAS 25M16, AND PERMANENTLY AFFIXED TO THE HEADER” and substitute “GASKET (SEE NOTE 23)”.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

PAGE 6

FIGURE 1, add the following circuit diagram between the existing diagrams:

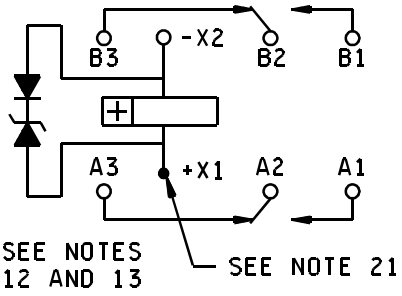

CIRCUIT DIAGRAM (NO MOUNT, RVFM, HFH AND TRACK MOUNT A)
(OPTIONAL INTERNAL
DIODE CONFIGURATION)

PAGE 7

NOTE 9, second sentence, delete and substitute: "Relays shall be marked with the manufacturer's name or CAGE code and the date code."

* NOTE 10, delete and substitute “10. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals, track mount B polarizing pin and ground pin, shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity”

* NOTE 11, delete and substitute “11. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 15 to 35, thickness .050 ±.005. Gasket material according to AMS 3332 has been considered acceptable. Silicone rubber gasket is not supplied with track mount A relays.”

* NOTE 16, delete and substitute “Track mount shall be corrosion resistant. One way of ensuring corrosion resistance is to nickel plate stainless steel 303 with 100 microinches minimum thickness. The finish on the top of the knob shall be lusterless black number 37038 in accordance with FED-STD-595 except that the slot shall be white marking color, number 27886 in accordance with FED-STD-595. The post shall be polyamide-imide in accordance with McDonnel Douglas Dwg. ST5M1454 (Deutsch Relays, Inc. Patent number 4,201,437).”

* NOTE 19, delete and substitute “19. Track mount B relay external materials and finishes shall be in accordance with McDonnell Douglas Dwg. ST5M1454 (Deutsch Relays, Inc. Patent number 4,201,437) and applicable specifications.”

* Add a NOTE 23, “23. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 30 to 45, thickness .050 ±.005. Gasket material according to AMS 3332 has been considered acceptable.”

PAGE 8

Delete "Contact voltage drop or resistance:" and substitute "Contact voltage drop and resistance:".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

PAGE 9

Operate time: Delete “4 milliseconds” and substitute “5 milliseconds”.

Release time: Delete “4 milliseconds” and substitute “5 milliseconds”.

Coil data; coil transient suppression: Delete "at".

PAGE 10

TABLE III, Coil resistance (ohms) minimum column, 28 V dc rated coil voltage (5 places): Delete "450" and substitute "440" (5 places).

PAGE 12

Delete "Maximum leakage current: 100 microamperes rms in accordance with MIL-R-83536." and substitute "Maximum leakage current for track mount only: 100 microamperes rms."

Vibration (random), first and second paragraphs: Delete "15 minutes each plane" (2 places).

PAGE 13

Weight: Delete "(20.4 g's)" and "(15.4 g's)" and substitute "(20.4 grams)" and "(15.4 grams)".

PAGE 14

TABLE V, last line: Delete "21-003" and "028".

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based upon the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1059-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.