INCH POUND

MIL-R-83536/4
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT,
LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE, MAGNETIC LATCH,
HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This amendment forms a part of MIL-R-83536/4, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 2

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 4

FIGURE 1, add the following circuit diagram

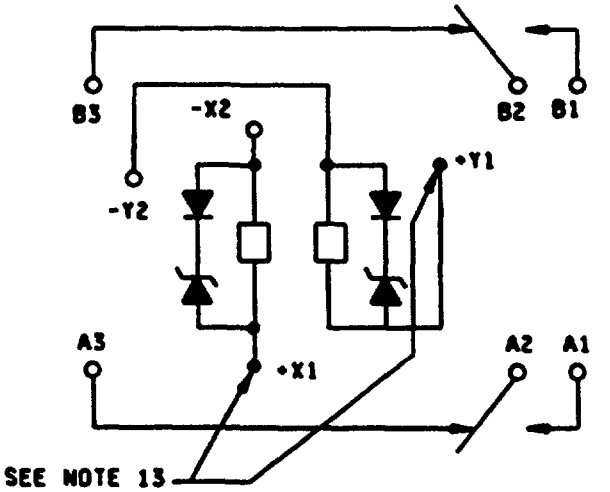

CIRCUIT DIAGRAM
(OPTIONAL INTERNAL
DIODE CONFIGURATION)

TO CLOSE A1 AND B1 CONTACTS (OPERATE),
ENERGIZE X1 AND X2.
TO CLOSEA3 AND B3. CONTACTS (RESET),
ENERGIZE Y1 AND Y2

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:43Z
Check the source to verify that this is the current version before use.

PAGE 6

Delete "Contact voltage drop or resistance " and substitute "Contact voltage drop and resistance "

PAGE 8

TABLE III, Coil resistance (ohms) minimum column, 6 V dc rated coil voltage (3 places) Delete "40" and substitute "38" (3 places)

TABLE III, column headings Delete "Specified pickup voltage" and substitute "Specified latch/reset voltage" (2 places)

PAGE 9

Vibration (random) line 2 Delete "15 minutes each plane"

Weight Delete "(16 34 g's)" and substitute "(16 34 grams)"

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA ES

(Project 5945-0964-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:43Z
Check the source to verify that this is the current version before use.