INCH-POUND

MIL-R-83536/8
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This amendment forms a part of MIL-R-83536/8, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 2

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 5

FIGURE 1, add the following circuit diagram

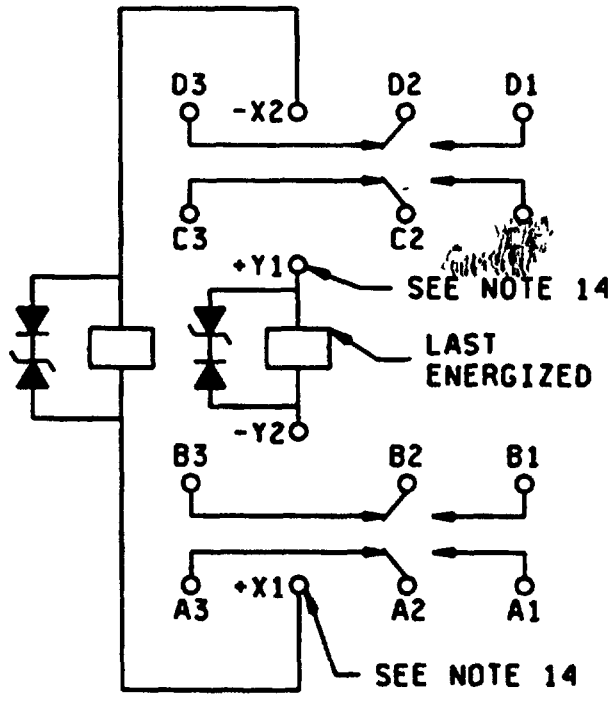

CIRCUIT DIAGRAM
(OPTIONAL INTERNAL DIODE CONFIGURATION)

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

PAGE 7

Delete "Contact voltage drop or resistance " and substitute "Contact voltage drop and resistance "

PAGE 9

TABLE III, column headings (2 places) Delete "Specified pickup voltage" and substitute "Specified latch/reset voltage"

PAGE 10

Vibration (random), line 2 Delete "15 minutes each plane"

Weight Delete "(29 1 g's)" and substitute "(29 1 grams)"

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5945-0964-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.