MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE III, CLASS 2, COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

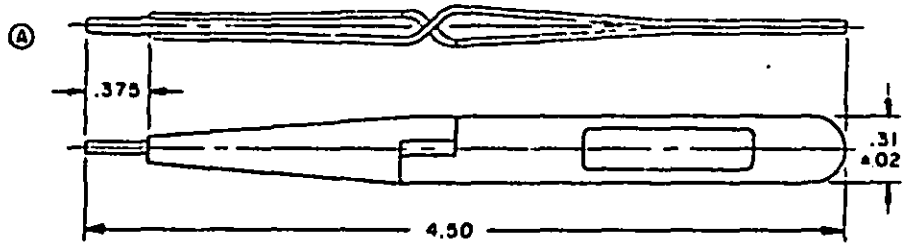

FIGURE 1. Installing and removal tool, dash -01.

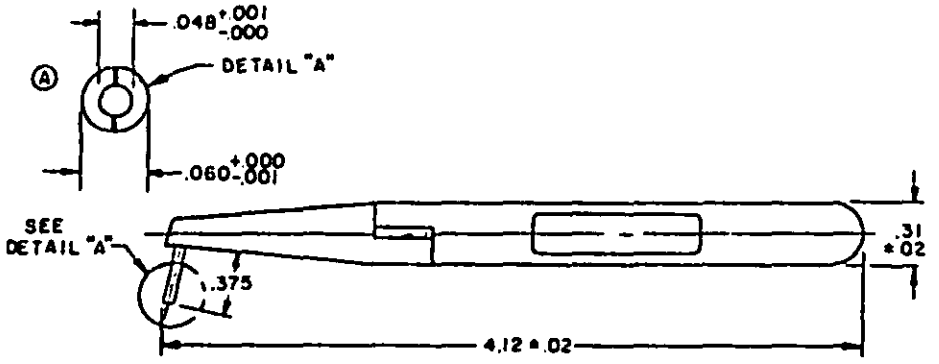

FIGURE 2. Installing and removal tool, dash -02.

Ⓐ Denotes changes.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.001	.03	.31	7.9
.02	.5	.375	9.52
.048	1.22	4.12	104.6
.060	1.52	4.50	114.3

Ⓐ

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 inch (.25 mm).
4. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 3. Metrics and notes for figures 1 and 2.

Ⓐ REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, and 3.

Material: Spring steel.

Plating: Nickel per QQ-N-290, .000030 inch thick.

Plunger force: Not applicable.

Part number:
M81969/12-01, straight extension.
M81969/12-02, angled extension.

Application: These tools shall be used to install and remove contacts from connectors specified in MIL-C-55302/65(USAF) and /66 (USAF).

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0889-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.