MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, (CRIMP REMOVABLE), TYPE II, CLASS 1, COMPOSITION A.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool described herein shall consist of this document and the latest issue of specification MIL-I-81969.

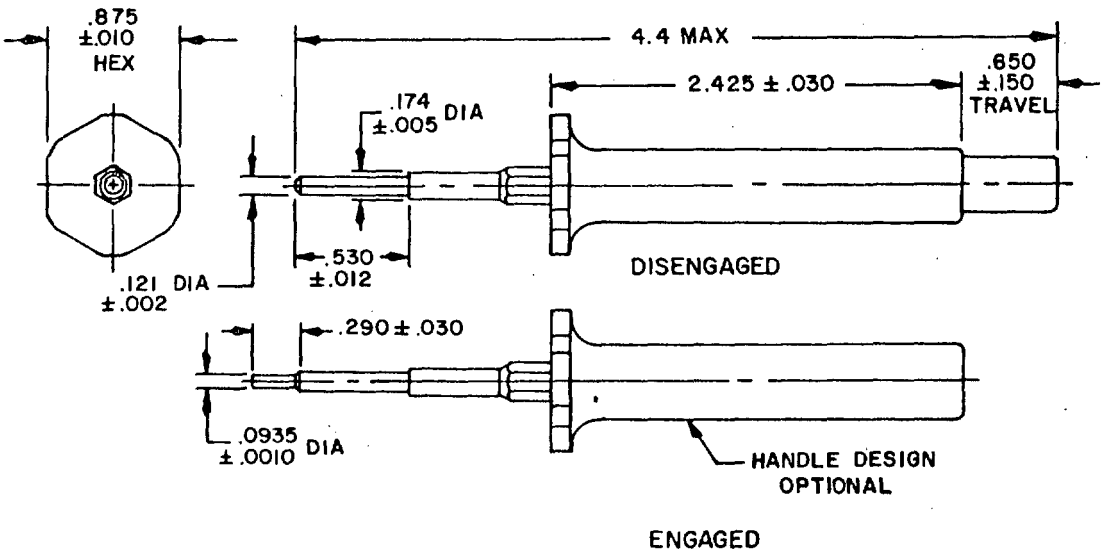

INCHES	MM	INCHES	MM	INCHES	MM
.0010	.025	.030	.76	.530	13.46
.002	.05	.0935	2.375	.650	16.51
.005	.13	.121	3.07	.875	22.22
.010	.25	.150	3.81	2.425	61.60
.012	.30	.174	4.42	4.4	111.8
		.290	7.37		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch=25.4 mm.
3. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.

Figure 1. Removal tool.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration	See figure.
Material:	
Handle	Aluminum alloy.
Nose guide assembly	CRES
Plunger force	3 lbs. max
Part number	M81969/22-01
Application	This tool shall be used to remove contacts specified in MIL-C-85028/1 and MIL-C-85028/2.

Custodians:
Army - EL
Navy - AS
Air Force - 11

Review activities:
Army - EL, GL
Navy - AS, EC
Air Force - 11, 17, 85, 99
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5120-0768-24)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1976 -703-020/241

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.