INCH-POUND

MIL-G-70595B (AR)
2 February 1991
SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

GYRO CONTROL BOARD: 9361069

This specification is approved for use within the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general and detail requirements for the Gyro Control Board (9361069) used in the M61A1 Director Sight. The gyro control board is mounted on the gimbal of the M61A1 Director Sight and interfaces with the rate integrating gyros to provide rate signals for stabilizing the sight. The gyro control board is a 4 inch square double sided board containing eight (8) microcircuits (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronics Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9361041 - Gyro Assembly
9361067 - Gyro Control Schematic
9361069 - Gyro Control Board, Assembly
10545465 - Isolator

SPECIAL PACKAGING INSTRUCTION

PS 9361069 - Packaging of Gyro Control Circuit Board Assembly

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the test of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9361069, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the gyro control board shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The gyro control board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
5-23 Hertz	0.076 inches double amplitude
23-40 Hertz	2 g
40-120 Hertz	4 g
120-200 Hertz	2.5 g
200-500 Hertz	4 g

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 5-500-5 Hertz sweep time shall be 15 minutes ± 10%.

3.3.2 Shock. The gyro control board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The gyro control board shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The gyro control board shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The gyro control board shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 degrees F and +155 degrees F.

3.3.4.2 Non-operating (storage). The gyro control board shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The gyro control board shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the gyro control board.

3.5 Performance.

3.5.1 Functional description. The gyro control board shall be a dual channel (azimuth and elevation) board that electrically cages the rate integrating gyros. The caging current is proportional to the mechanical rate input to the gyro. Included on the board is an oscillator and power booster to drive the gyro gimbal pickoffs. The motor phasing capacitors for the gyro spinmotors are mounted on this board.

3.5.2 Input/output connections. The input/output connections shall be as specified in Table I (Power connections), Table II (Azimuth connections), and Table III (Elevation connections).

TABLE I. Power connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
a	+24 volts dc ± 10%, 1 amp	+22.6 to +26.4 Vdc
c	-24 volts dc ± 10%, 1 amp	-22.6 to -26.4 Vdc
b	Power return	Ground
V	Signal return	Ground
L	Signal return	Ground
F	Gyro motor drive	30 V rms ± 10%, 400 Hz ± 1%

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

TABLE II. Azimuth connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
P	Gyro torquer return	-5 to +5 V
Z	Gyro torquer return	-5 to +5 V
R	Gyro torquer drive	-20 to +20 V
X	Gyro gimbal pickoff	3 Vac Double Sideband Suppressed Carrier 3500 Hz
W	Gyro gimbal pickoff	3 Vac Double Sideband Suppressed Carrier 3500 Hz
S	Gyro pickoff excitation	6.8 to 7.2 V rms, 3450 to 3550 Hz
T	Gyro pickoff return	Ground
U	Gyro spinmotor quadrature phase drive	30 V ± 10% rms

TABLE III. Elevation connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
B	Gyro torquer return	-5 to +5 V
Y	Gyro torquer return	-5 to +5 V
A	Gyro torquer drive	-20 to +20 V
H	Gyro gimbal pickoff	3 Vac Double Sideband Suppressed Carrier 3500 Hz
J	Gyro gimbal pickoff	3 Vac Double Sideband Suppressed Carrier 3500 Hz
C	Gyro pickoff excitation	6.8 to 7.2 V rms, 3450 to 3550 Hz
D	Gyro pickoff return	Ground
E	Gyro spinmotor quadrature phase drive	30 V ± 10% rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

3.5.3 Power requirements. The gyro control board power requirements shall be in accordance with Table I.

3.5.4 Electrical. The gyro control board is used to electrically cage gyro 9361041. The gyro control board, when used with gyro 9361041, shall produce 5 volts ± 1% for 57.3 degrees/second angular velocity.

3.6 Spare pins. The gyro control board shall have the following spare pins: M, K, N, d.

3.7 Test points. The gyro control board shall have test points in accordance with Table IV (Test points).

TABLE IV. Test points.

TP1	Az Demodulation Signal
TP2	El Demodulation Signal
TP3	Oscillator Output

3.8 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.9 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) gyro control boards for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table V (Functional tests) and Table VI (Special sampling) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the currentversion before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table V shall be performed on a 100% basis.

TABLE V. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

4.5 Special sampling. One gyro control board out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table V and shall then meet the tests in Table VI. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE VI. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table VII (Test Equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE VII. Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	Test set	See Figure 1 and Table VIII.
2.	Frequency response analyzer Sweep oscillator Vector voltmeter	Dual Channel, IEEE 488 bus 1 to 5000 Hz 0.1 to 10 V rms output 30 mV to 30 V
3.	Plotter	IEEE 488 bus, Hewlett - Packard Graphics Language or equivalent
4.	Digital voltmeter	10 megohm impedance 3 mV to 30 Vdc 3 mV to 30 V rms ac
5.	Continuity checker	Standard ohmmeter 0.1 ohm accuracy
6.	Isolator	10545465
7.	Oscilloscope	Dual trace 1 megohm impedance 30 V rms ac
8.	Frequency counter	1 megohm impedance 60 to 10,000 Hz 1 volt sensitivity

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:45Z
Check the source to verify that this is the currentversion before use.

TABLE VIII. Parts list for gyro board test circuit.

ITEM	DESCRIPTION
P1	Connector, M28748/8E00G1A
S1	4 pole, double throw, 1A minimum
S2	8 pole, 3 position, 0.5A minimum
B1	Gyro, 9361041
AR1	Power op-amp, Burr Brown 3571 or equivalent
C1, C2	Capacitor, 0.1 uF, 50 V
C3	Capacitor, 1000 pF, 50 V
R1, R3	150 Kohms, 1%
R2, R4	15 Kohms, 1%
R5, R6	1 Kohms
R7, R9	100 Kohms
R8, R10	75 Kohms
R11	220 ohms, 2 W, 5%
R12	75 ohms
R13	750 ohms
PS1	$\pm$24 Vdc $\pm$ 10%, 1.0A minimum
PS2	30 V rms $\pm$ 10%, 400 Hz $\pm$ 1.0%, 5 W minimum

All resistors are 1/4 W, 2% unless otherwise noted.

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:45Z
Check the source to verify that this is the current version before use.

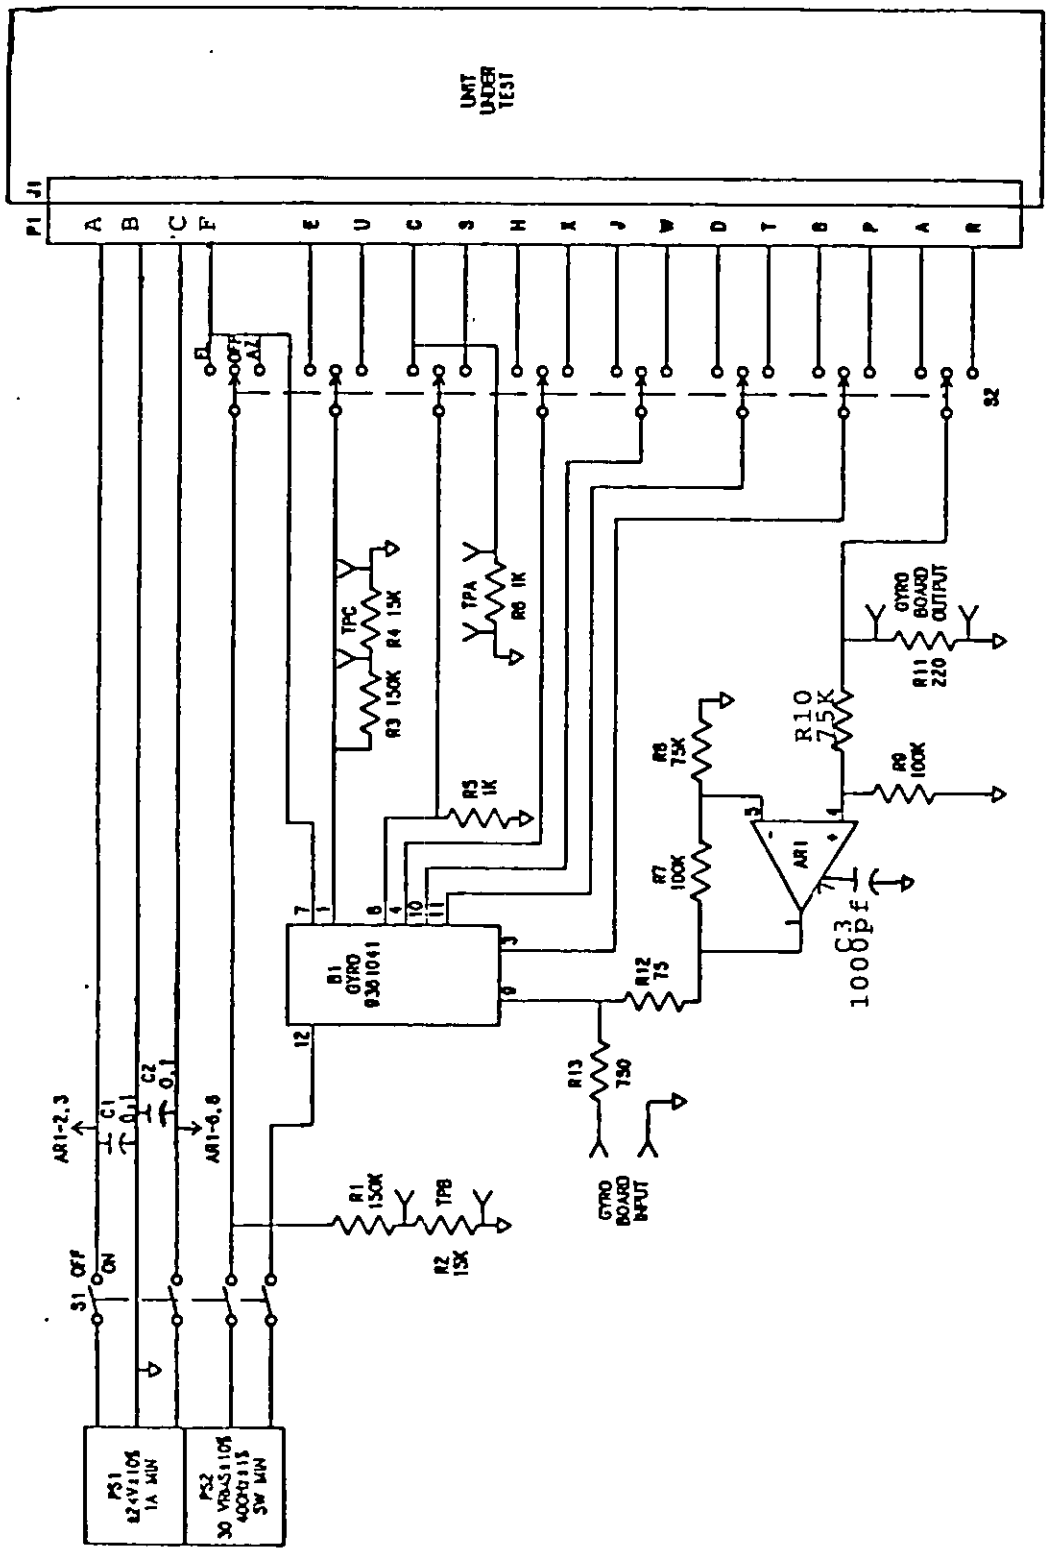


FIGURE 1. Gyro board test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The gyro control board shall be attached to the vibration generator directly or with a fixture using isolator 10545465, and securely held by its normal means of attachment. After vibration, the gyro control board shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

e. The gyro control board shall be mounted directly or with a fixture using isolator 10545465 and securely held by its normal means of attachment.

After the application of all the shock impulses, the gyro control board shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The performance shall be evaluated using the equipment listed in Table VII.

a. Connect board under test to test set, Figure 2, and set switch S2 on the test set to AZ. Connect digital voltmeter and frequency counter to TEST POINT A on test set. Set digital voltmeter to measure ac volts.

b. Adjust R46 on the board under test for a frequency between 3450 and 3550 Hz. Adjust R44 on the board under test for an amplitude between 6.8 and 7.2 volts rms.

c. Connect one input of the oscilloscope to TEST POINT B and the other input to TEST POINT C on test set. Set oscilloscope for a chopped display. The two sine waves shall be displaced by 90 $\pm$ 10 degrees and amplitudes shall be within 15%.

d. Connect sweep oscillator of frequency response analyzer to GYRO BOARD INPUT on test set. Connect GYRO BOARD OUTPUT of test set to vector voltmeter of frequency response analyzer. Using a 10 volt rms sine wave input, measure the gain and phase response of the board under test from 20 to 5000 Hz. The gain response and the phase response shall be within the limits shown in Figures 3 and 4.

e. Repeat steps c and d for the elevation channel by setting switch S2 on the test set to EL. Note that Figures 3 and 4 also apply for the elevation channel.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.9.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

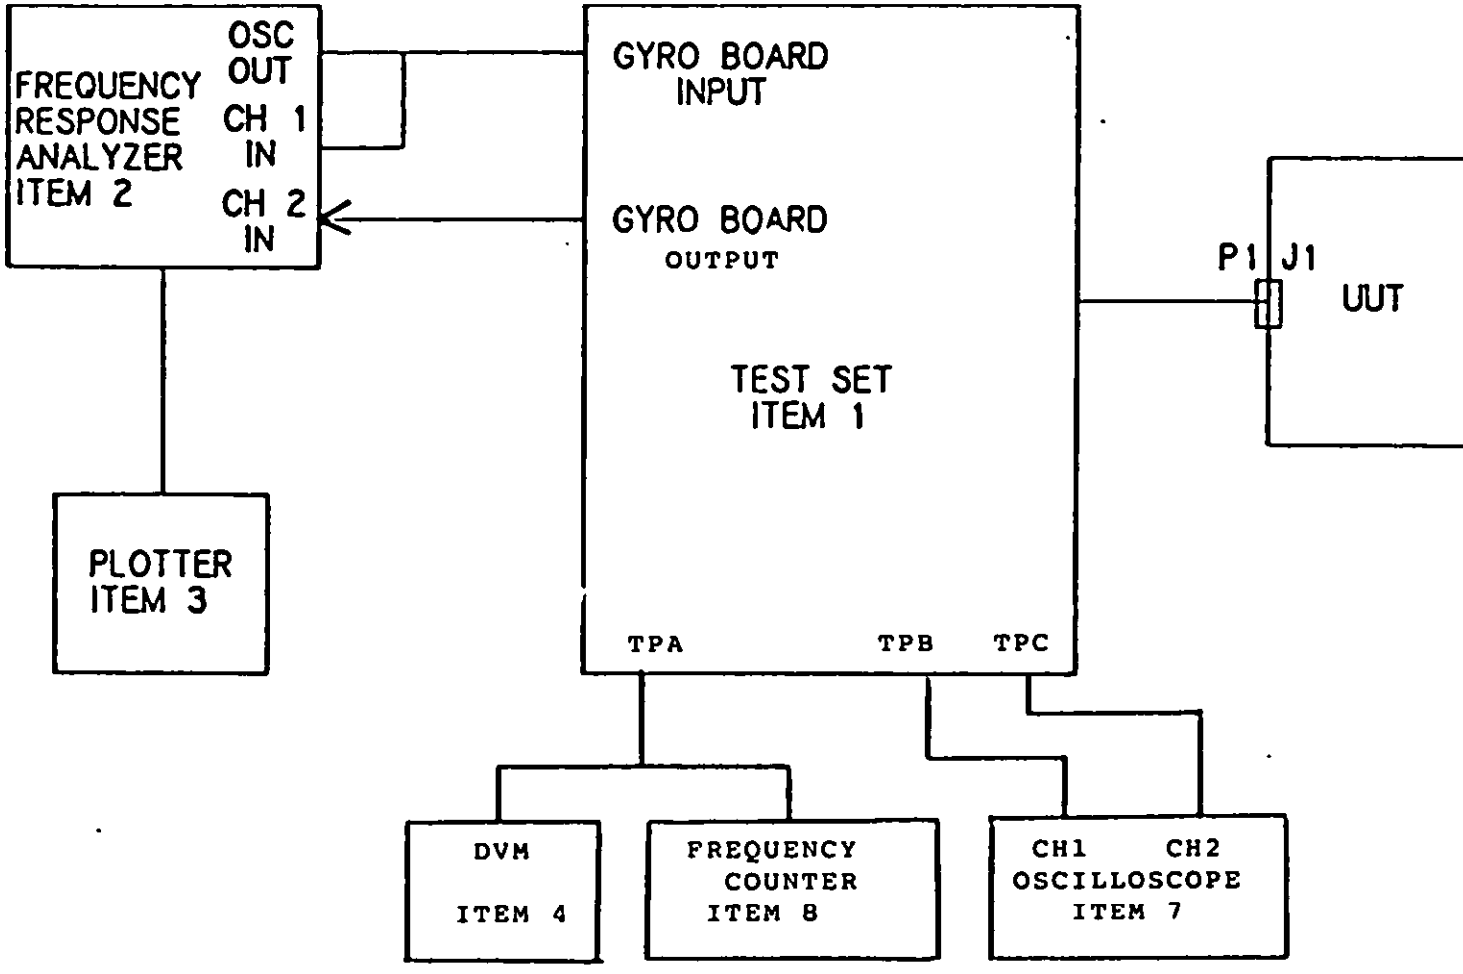


FIGURE 2. Gyro board test set-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

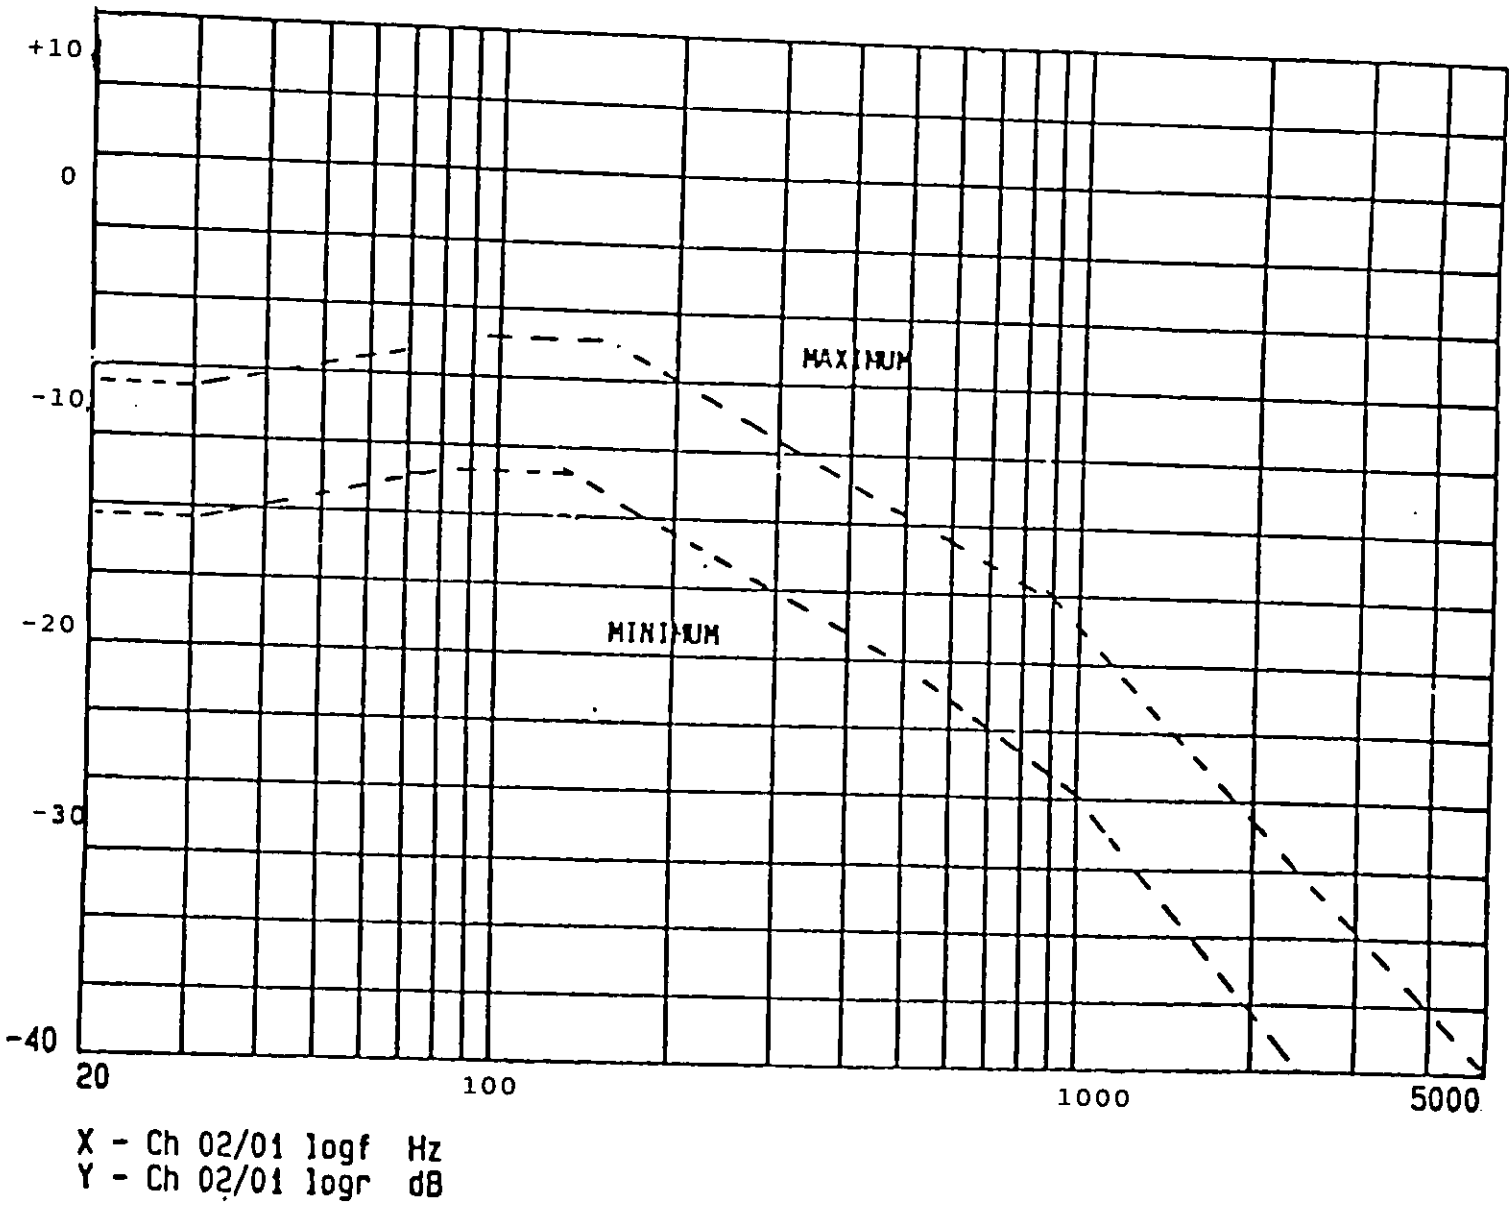


FIGURE 3. Gain response.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:45Z
Check the source to verify that this is the current version before use.

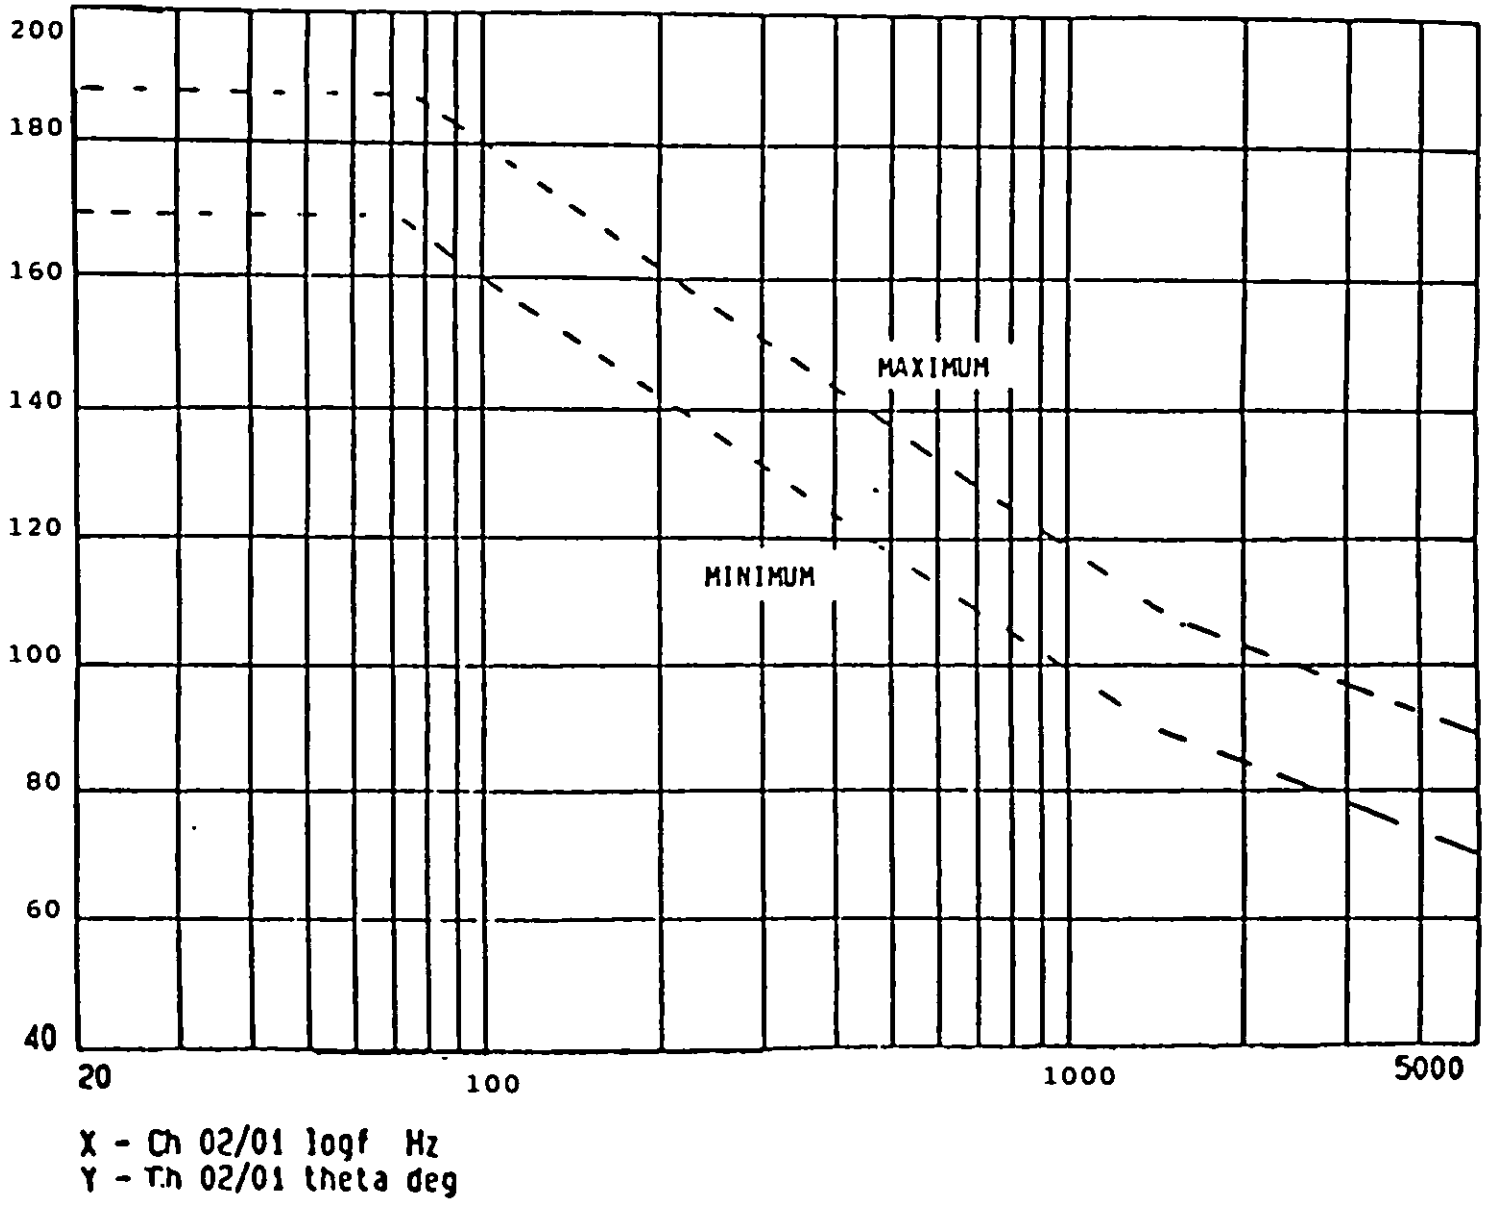


FIGURE 4. Phase response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction PS 9361069.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The gyro control board shall be used in the M61A1 Director Sight in the M163A2 Self Propelled and M167A2 Towed VADS.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First article sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of Conformance for each lot of shipment or product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Director sight, M61A1
Fire Control System
Rate integrating gyros
M163A2 Self-Propelled Vulcan Air Defense System (VADS)
M167A2 Towed Vulcan Air Defense System (VADS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The previous issues were for ARDEC internal use only. They were not forwarded to Naval Publication and Forms Center (NPFC) for publication. This issue is initial public release for unlimited distribution.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A749)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-G-70595B (AR)	2. DOCUMENT DATE (YYMMDD) 2 February 1991

3. DOCUMENT TITLE: GYRO CONTROL BOARD: 9361069

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US ARMY ARDEC STANDARDIZATION OFFICE	b. TELEPHONE (Include Area Code) (1) Commercial: (201) 724-6674 (2) AUTOVON: 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — *Previous editions are obsolete.* — 198/290

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:45Z
Check the source to verify that this is the current version before use.