MIL-H-82157A(MC)
18 September 1973
SUPERSEDING
MIL-H-82157(MC)
4 August 1967

MILITARY SPECIFICATION

HAT, RAIN: MAN'S, COTTON, RUBBER COATED, OLIVE GREEN 107

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers requirements for a man's hat made of rubber coated laminated cotton cloth.

*1.2 Classification. The hat shall be made of one type in the following sizes as specified (see 6.2):

Schedule of sizes
Extra small
Small
Medium
Large
Extra large

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-28996 - Cloth, Laminated: Cotton; Rubber Or Synthetic Rubber Coated.
MIL-B-17757 - Boxes, Fiber, Corrugated (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-751 - Stitch, Seam And Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished hats specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

3.3 Materials.

*3.3.1 Side crown and binding. The side crown and bias binding for edge of brim, outside brim and side crown reinforcement strapping, inside top crown and side crown reinforcement strapping and inside back side crown reinforcement strapping shall be made of cloth conforming to type I of MIL-C-28996.

*3.3.2 Brim and top crown. The brim and top crown shall be made of the material specified in 3.3.1, except that 4 plies of cloth shall be laminated together in lieu of 2 plies. The combined finished weight of the material shall not exceed 28 ounces per square yard, and in all other respects each laminated 2 plies of material shall conform to Table I of MIL-C-28996.

*3.3.3 Cotton thread. The cotton thread shall conform to V-T-276, type IA3, soft finish, ticket No. 40, 3-ply for seaming and stitching. The color of the thread shall match olive drab shade S-1 Cable No. 66022. The dyed thread shall show colorfastness to laundering, chlorine bleaching, perspiration and light, equal to or better than the standard sample when tested as specified in the thread specification. When no standard sample is available, the dyed thread shall show good colorfastness to laundering, chlorine bleaching, perspiration and light when tested as specified in the thread specification.

*3.3.4 Cement (adhesive). The cement used in adhering the cloth strapping to the three areas indicated in Figure 1 shall be made from the same composition used in the lamination of the basic cloths.

*3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores, and shall be enameled a color to closely match the shade of the basic material, or the flange only may be enameled. The eyelet shall conform to the following dimensions:

Outside diameter of barrel, inch:	0.185 ±0.004
Outside diameter of flange, inch:	0.312 ±0.005
Length of barrel under flange, inch:	0.145 ±0.004
Metal thickness, inch:	0.008 ±0.001

*3.3.6 Label. Each hat shall have an identification and size marking label conforming to type III or IV, class 5, of DDD-L-20 and the colorfastness for laundering requirement shall apply. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Stock number
Size
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

3.4 Design. The hat shall be the Marine Corps design shown on Figure 1.

*3.5 Patterns. Standard patterns will be furnished by the Government and shall not be altered in any manner. They shall be used only as a guide for cutting working patterns. These patterns show size, and are marked or notched for proper cutting, placement, and assembly of component parts. The standard patterns provide a 1/4-inch allowance for all seams except as otherwise specified in Table I.

*3.5.1 List of pattern parts. Hats shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
1.	Top crown	1
2.	Brim	1
3.	Side crown	1

*3.6 Construction.

*3.6.1 Manufacturing requirements. The hats shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the hats.

*3.6.1.2 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

*3.6.1.2.1 Ends of seams and thread breaks. End of seams and stitching, except ends of a continuous row of stitching, produced with 301 stitch type, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired using stitch type 301.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut hats in strict accordance with patterns furnished by the Government. b. Cut parts in the direction indicated by directional lines on pattern. c. The entire center piece of the fabric remaining after the brim is cut shall be used for the top crown. d. Bias binding and reinforcement strapping shall be cut 3/4 to 7/8 inch wide.					
2.	Make side crown. a. The side crown shall be made of one ply of material. b. Fold the side crown in half width wise and join the two ends together with a 1/4-inch seam.	301	LSq-2 (a)	8-10	40/3	40/3
	c. Turn the seam allowance flat against the body of the side crown and topstitch 1/16 to 1/8 inch from raised edge. d. Apply a coat of cement on the inside of side crown joining seams. e. Securely adhere the strapping along joining seam with side and bottom edges of strapping turned under.	301	LSq-2 (b)	8-10	40/3	40/3
3.	Join side crown to brim and top crown. a. Position the upper edge of side crown on the outside of top crown face to face, with raw edges even, notches matching and joining seams of					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Join side crown to brim and top crown. (cont'd)					
	side crown matching the back notch of top crown.					
	b. Stitch two plies together with a 1/4-inch seam.	301	LSq-2 (a)	8-10	40/3	40/3
	c. Turn down side crown and topstitch through all plies 1/16 to 1/8 inch from raised seam.	301	LSq-2 (b)	8-10	40/3	40/3
	d. Position the lower edge of side crown on brim with reverse side of cloth face to face, edges even and notches matching.					
	e. Stitch the two plies together with 1/4-inch seam.	301	LSq-2 (a)	8-10	40/3	40/3
	f. Turn down side crown and topstitch through all plies 1/16 to 1/8 inch from raised edge.	301	LSq-2 (b)	8-10	40/3	40/3
	g. Apply a coat of cement on the inside of the top and side crown joining seam.					
	h. Securely adhere the strapping along the joining seam with side edges of strapping turned under and overlapping ends at the back.					
	i. Apply a coat of cement on the outside of brim and side crown joining seams.					
	j. Securely adhere the strapping along joining seam with side edges of strapping turned under and overlapping the ends at the back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Join side crown to brim and top crown. (cont'd) k. Bind the outer edge of brim with cloth specified in 3.3.1.					
4.	Eyelet. One eyelet shall be placed on each side of the side crown at the locations shown on Figure 1 and shall be securely clinched to the cloth without splitting and damaging the cloth.					
5.	Cleaning. a. All ends of threads shall be trimmed and all loose ends removed from the hat. b. All spots and stains shall be removed.					

*3.7 Finished measurements. The finished hats shall conform to the measurements shown in Table II.

Table II - Finished measurements 1/

Size of hat	Head measurement	Height of side crown	Width of brim
Extra small	21-1/4	3-1/2	2-1/2
Small	22	3-1/2	2-1/2
Medium	22-3/4	3-1/2	2-1/2
Large	23-1/2	3-1/2	2-1/2
Extra large	24-1/4	3-1/2	2-1/2
1/ Tolerance:	+ 3/8 - 3/16	+ 1/4 - 0	+ 1/4 - 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

*3.8 Workmanship. The finished hat shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated hat for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

TABLE III - Component Tests

Component & lot expressed in terms of	Characteristic	Reqt. Para.	Test Method	Det/ S/U	Results Reported as:	Sample Unit
Eyelets (pound)	Material Identification	3.3.5	1/	1	Pass or Fail	1/4 lb.
	Dimensions	3.3.5	Standard commerical	1	To nearest 0.001 inch	
	Finish	3.3.5	Standard commercial	1	Pass or Fail	

1/ Accept on certificate of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 through 4.2.3.3. The sample unit shall be one hat.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Material defect and damages	a. Any hole or weakening defect such as smash, multiple float, loose slub, etc. that may develop into a hole.	X		
	b. Shade bar, unsightly slub, etc., on outside.	X		
	c. Scissor or knife cut, tear, mend, burn, large exposed drill hole or needle chews which may develop into a hole.	X		

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspiciously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

	Material defects Workmanship damages	No defect Minor B defect		
Cleanness	a. One or more ink spots or stains of an obvious permanent nature.	X		
	b. One or more spots or stains clearly noticeable.		X	
	c. Thread ends not trimmed or loose threads not removed throughout hat.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Component and assembly	a. Any defective component or defect of assembly (unless otherwise classified).	X		
	b. Any component part or required operation omitted (unless otherwise classified).	X		
Cutting	Any component part of basic material not cut in accordance with specification requirements.	X		
Seams and stitches	a. Accuracy of seaming:			
	1. Seams twisted, puckered or pleated, affecting appearance (unless otherwise classified).		X	
	2. Part of garment caught in any unrelated operation or stitching.		X	
	3. Thread breaks or ends of all stitching (when not caught in other seams or stitchings) not securely backstitched.		X	
	b. Gage or stitching (edge or raise stitching):			
	1. Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance.		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	3. Edge or raise stitching sewn too close to edge, resulting in damage to cloth.		X	
	c. Open seams:			
	-3/16 inch but not more than 1/2 inch.			X
	-more than 1/2 inch but not more than 3/4 inch.		X	
	-more than 3/4 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches constitute an open seam.				
d.	Raw edges:			
	1. On outside:			
	- more than 3/16 inch but not more than 1/2 inch.			X
	- more than 1/2 inch but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		
NOTE: Raw edges not securely caught in stitching shall be classified as an open seam. Raw edge is classified as such only when it occurs at places where edge is required to be turned under.				
e.	Run-offs:			
	1. On raised or top stitching when not resulting in an open seam (outside only):			
	- more than 1/2 inch but not more than 1 inch.			X
	- more than 1 inch.		X	
NOTE: On joining seams, when resulting in an open seam, score as "open seam".				
f.	Seam and stitch type:			
	Wrong seam or stitch type.		X	
g.	Stitch tension.			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin thread or top thread.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		

NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.

	h. Stitches per inch less than minimum specified (applicable to 8-10 per inch):			
	- 1 stitch.			X
	- 2 or 3 stitches.		X	
	- more than 3 stitches.	X		

NOTE: To be scored only when condition exists on major portion of seam.

	i. Stitches skipped or broken on edge or raised stitching (when seam is seamed, turned and stitched) and top stitching:			
	- more than 1/4 inch but not more than 3/4 inch.			X
	- more than 3/4 inch.		X	

*4.2.3.2 Detailed defects applicable to specific parts. Detailed defects applicable to specific parts of hat shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Crown	a. Less than 4 plies.	X		
	b. Unevenly joined to side crown, resulting in twisting, pleating or puckering of crown or side crown, affecting appearance.		X	
	c. Crown distorted as a result of off-centering front and back notches.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Crown poorly shaped, affecting appearance.			
Side crown	a. Less than 2 plies.	X		
	b. Binding strip not securely cemented to side crown brim joining seam.	X		
	c. Back seam of side crown not centered at back center of crown by: - 1/4 inch to 3/8 inch. - more than 3/8 inch.		X	X
	d. Binding strip at side crown - brim joining seam less than 5/8 inch wide.			X
	e. Binding strip not centered on seam by: - 3/16 inch to 1/4 inch - more than 1/4 inch		X	X
Eyelets	a. One or both omitted, broken, bent, cracked or not securely clinched to fabric.	X		
	b. Not centered between brim and top crown seams, or back and front center points: - more than 1/2 inch but not more than 3/4 inch. - more than 3/4 inch.		X	X

NOTE: Matching of notches cannot be checked on the finished hat since seams are covered by strapping, but any distortion of the crown is an indication that notches have not been matched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	c. Inside diameter (aperture) less than 3/16 inch.			X
	d. Outside diameter less than 5/16 inch.			X
	e. Not specified type or finish			X
Brim	a. Distorted as a result of off centering of front and back notches from corresponding points on side crown.		X	
	b. Puckered, stretched, or distorted in the binding of edge or in joining to side crown, affecting appearance.		X	
	c. Edge binding pleated, tight, or twisted, affecting appearance.		X	
	d. Edge of brim not fully inserted in binding.		X	
Side crown and crown joining seam.	a. Binding strip not centered on seam by: - 3/16 inch to 1/4 inch. - more than 1/4 inch.		X	X
	b. Binding strip not securely cemented.	X		
Side crown and brim joining seam.	a. Binding strip not cemented on seam by: - 3/16 inch to 1/4 inch. - more than 1/4 inch.		X	X
	b. Binding strip not securely cemented.	X		
Labels (heat transfer or stamped)	a. Size: - Missing, incorrect or illegible.	X		
	b. Identification: - Missing, incorrect or illegible.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

*4.2.3.3 Finished measurements. Any measurement deviating from the nominal dimensions and tolerances specified in Table II shall be classified as a size measurement defect.

*4.2.3.4 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1 and 4.2.3.2

Inspection level I of MIL-STD-105	
Major	2.5 DHU
Major and Minor A(combined)	6.5 DHU
Total Major, Minor A and Minor B (combined)	10.0 DHU

4.2.3.3

Inspection level S-3 of MIL-STD-105	
One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of hats per shipping container is more or less than required. Improper number of intermediate packages per container. For this defect, one intermediate package from each container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, and C as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

5.1.1.1 Method 1. Sixty (60) hats, of one size only, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, size 2A, of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.2.1).

*5.1.1.2 Method 2 When specified (see 6.2), six level B shipping containers (360 hats of one size only) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.2.1).

5.1.2 Level B. Sixty (60) hats, of one size only, shall be packed in a fiberboard shipping container with liner conforming to type CF or SF, class domestic, grade 275, size 2A of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.2.1).

5.1.3 Level C. Hats shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.2 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.2.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label, 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The hats described herein are intended for wear by male personnel of the U. S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

Source: https://assist.dla.mil/ Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of hats in first article (see 3.2).
(e) Selection of applicable level of packing (see 5.1).
(f) When level B, method 2 packing is required (see 5.1.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Sample. For information regarding the availability of sample of the hat, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous issue were made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - MC
Project No. 8405-N550

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

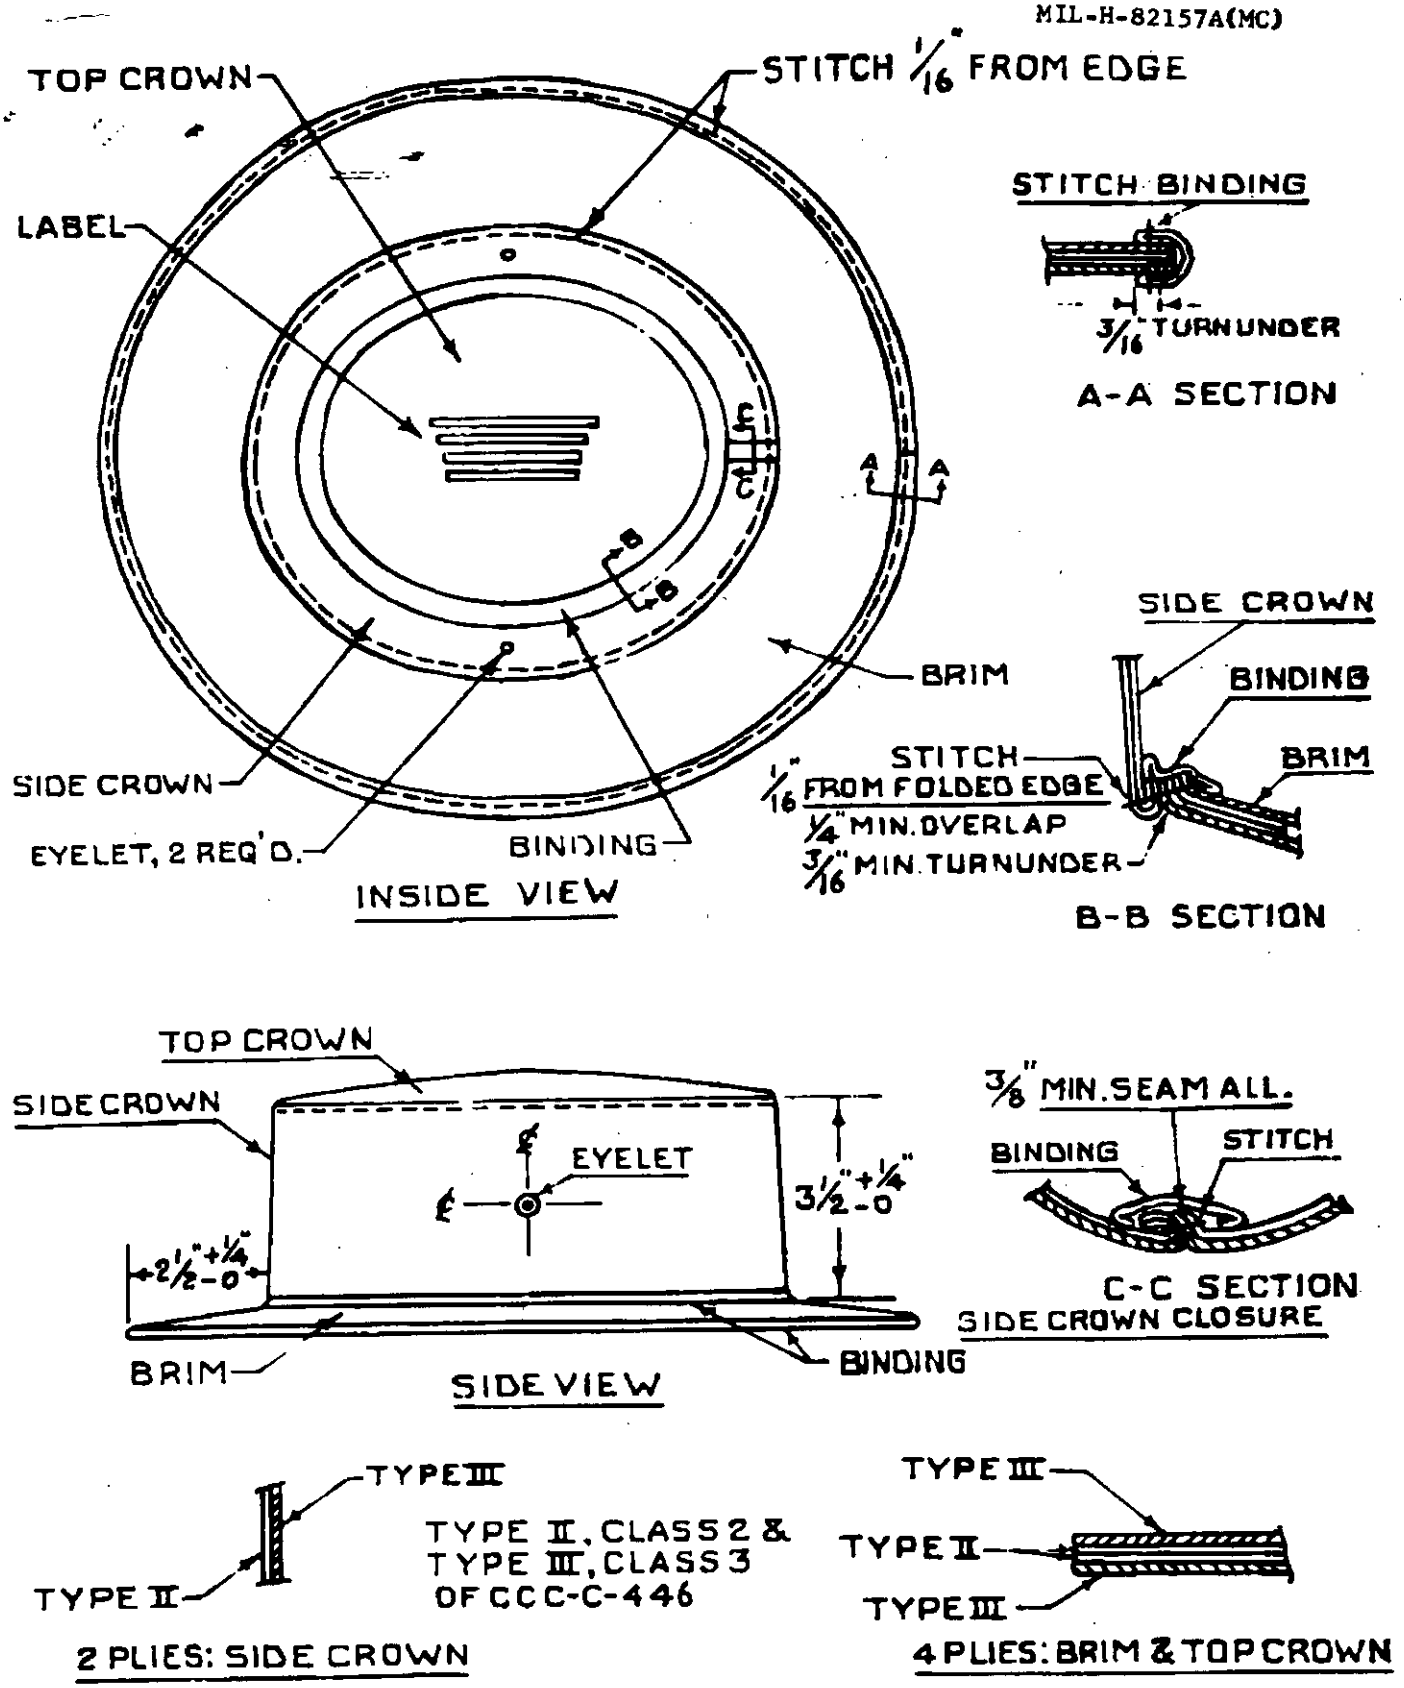


FIGURE 1. HAT, RAIN: MAN'S, COTTON, RUBBER COATED; OLIVE GREEN 107

M.C.S.A. 826:RG.F 18 Sep 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:48Z
Check the source to verify that this is the current version before use.