TESTER, FLASH GUN, PHOTOGRAPHIC LM-66( )

1. SCOPE

1.1 Scope. — This specification covers one type of a portable photographic flash gun tester for field testing photographic flash equipment designated as Tester, Flash Gun, Photographic LM-66( ). (See 6.3.)

2. APPLICABLE DOCUMENTS

2.1 Documents. — The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-571	Solder; Lead Alloy, Tin Lead Alloy, and Tin Alloy; Flux Cored Ribbon and Wire, and Solid Form.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-591	Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-R-94	Resistors, Variable, Composition.
MIL-P-116	Preservation, Methods of.
MIL-M-10304	Meters, Electrical Indicating, Panel Type, Ruggedized.
MIL-B-10377	Box, Wood, Cleated, Veneer, Paper-overlaid.
MIL-R-10509	Resistors, Fixed, Film (High Stability).
MIL-W-13169	Wire, Electrical (for Instrument Test Leads).
MIL-W-13231	Marking of Electronic Items.
MIL-F-14072	Finishes for Ground Signal Equipment.
MIL-F-14256	Flux, Soldering, Liquid (Rosin Base).

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T22:28Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes.
MIL-STD-169	Extreme-Temperature Cycle.
MIL-STD-170	Moisture Resistance Test Cycle for Ground Signal Equipment.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects.

DRAWINGS

SIGNAL CORPS

SC-A-362100	Requirements for Preparation of Packaging and Packing Illustrations and Bills of Materials.

(Copies of specifications, standards, and drawings, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies.)

2.2 Publications. — The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

CONSOLIDATED CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Union Station, Chicago 6, Ill.)

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:28Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. - Tester, Flash Gun, Photographic LM-66( ) is a tester, housed in a compact case, capable of testing the condition of the batteries in or out of the flash gun, and to check continuity of flash bulbs and the flash system as well as the components of the photoflash circuit of any camera set utilizing the following types of flash bulbs: GE5, GE11, GE22 or their equivalents.

3.2 Preproduction samples. - The contractor shall furnish two preproduction samples of Tester, Flash Gun, Photographic, LM-66( ) for approval, provided the invitation for bids and contract requires samples. (See 4.3.)

3.3 Construction. - The tester shall be constructed in accordance with the requirements specified herein.

3.3.1 Front panel layout. - The layout of the front panel shall be as indicated in Figure 1.

3.3.2 Circuit. - The wiring circuit for the tester shall be in accordance with Figure 2.

3.3.3 Dimensions. - The dimensions of the tester shall be kept to the minimum without impairing the function and performance and shall not exceed the following:

Length - 5 inches
Width - 3 inches
Depth - 2 inches

3.4 Case. - The case shall be constructed of high impact plastic material or suitable lightweight metal capable of meeting the requirements specified herein. Space and brackets shall be provided in the hinged cover for storage of the test leads. (See 3.5.)


3.4.1 Battery compartment. - A battery compartment shall be provided in the case to house the battery, BA-58, required for operating the tester. This battery shall be easily replaced for maintenance purposes.

3.5 Test leads. - Two test leads, twelve inches ± 1/8 inch in length, shall be provided in accordance with the following:

3.5.1 Wire. - The test lead wire shall be single conductor, AWG size 18, stranded electrical wire conforming to Specification MIL-W-13169.

3.5.2 Terminals. - The test lead shall terminate at one end with an alligator clip, Mueller Electric Company, Cleveland, Ohio, No. 60 series, or equal, and at the other end with a jack pin.


Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

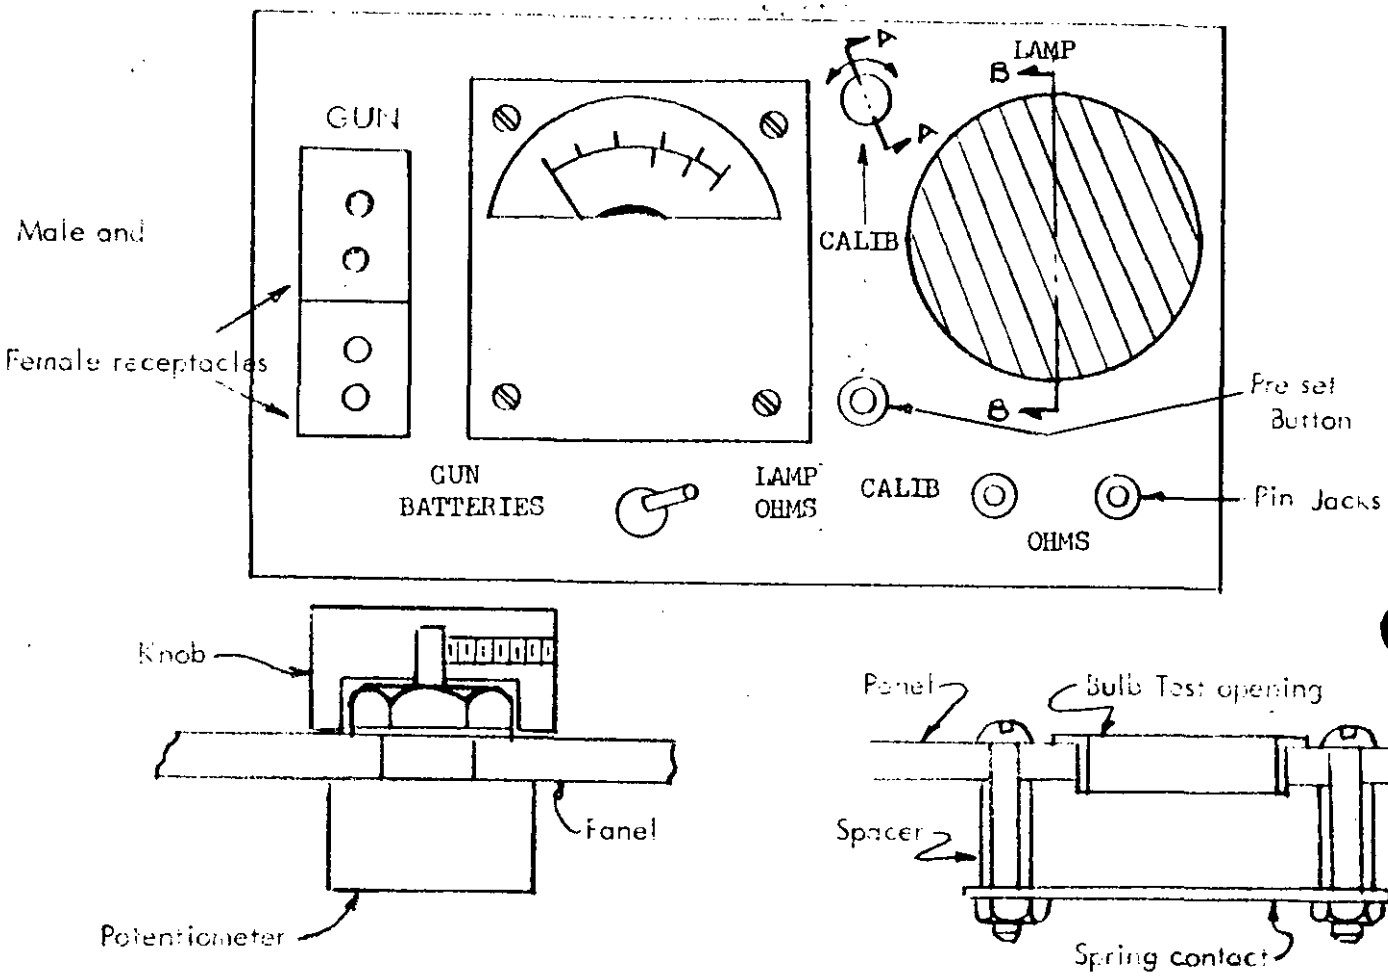

PANEL LAYOUT
FOR
TESTER, FLASH GUN, PHOTOGRAPHIC LM-66( )

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

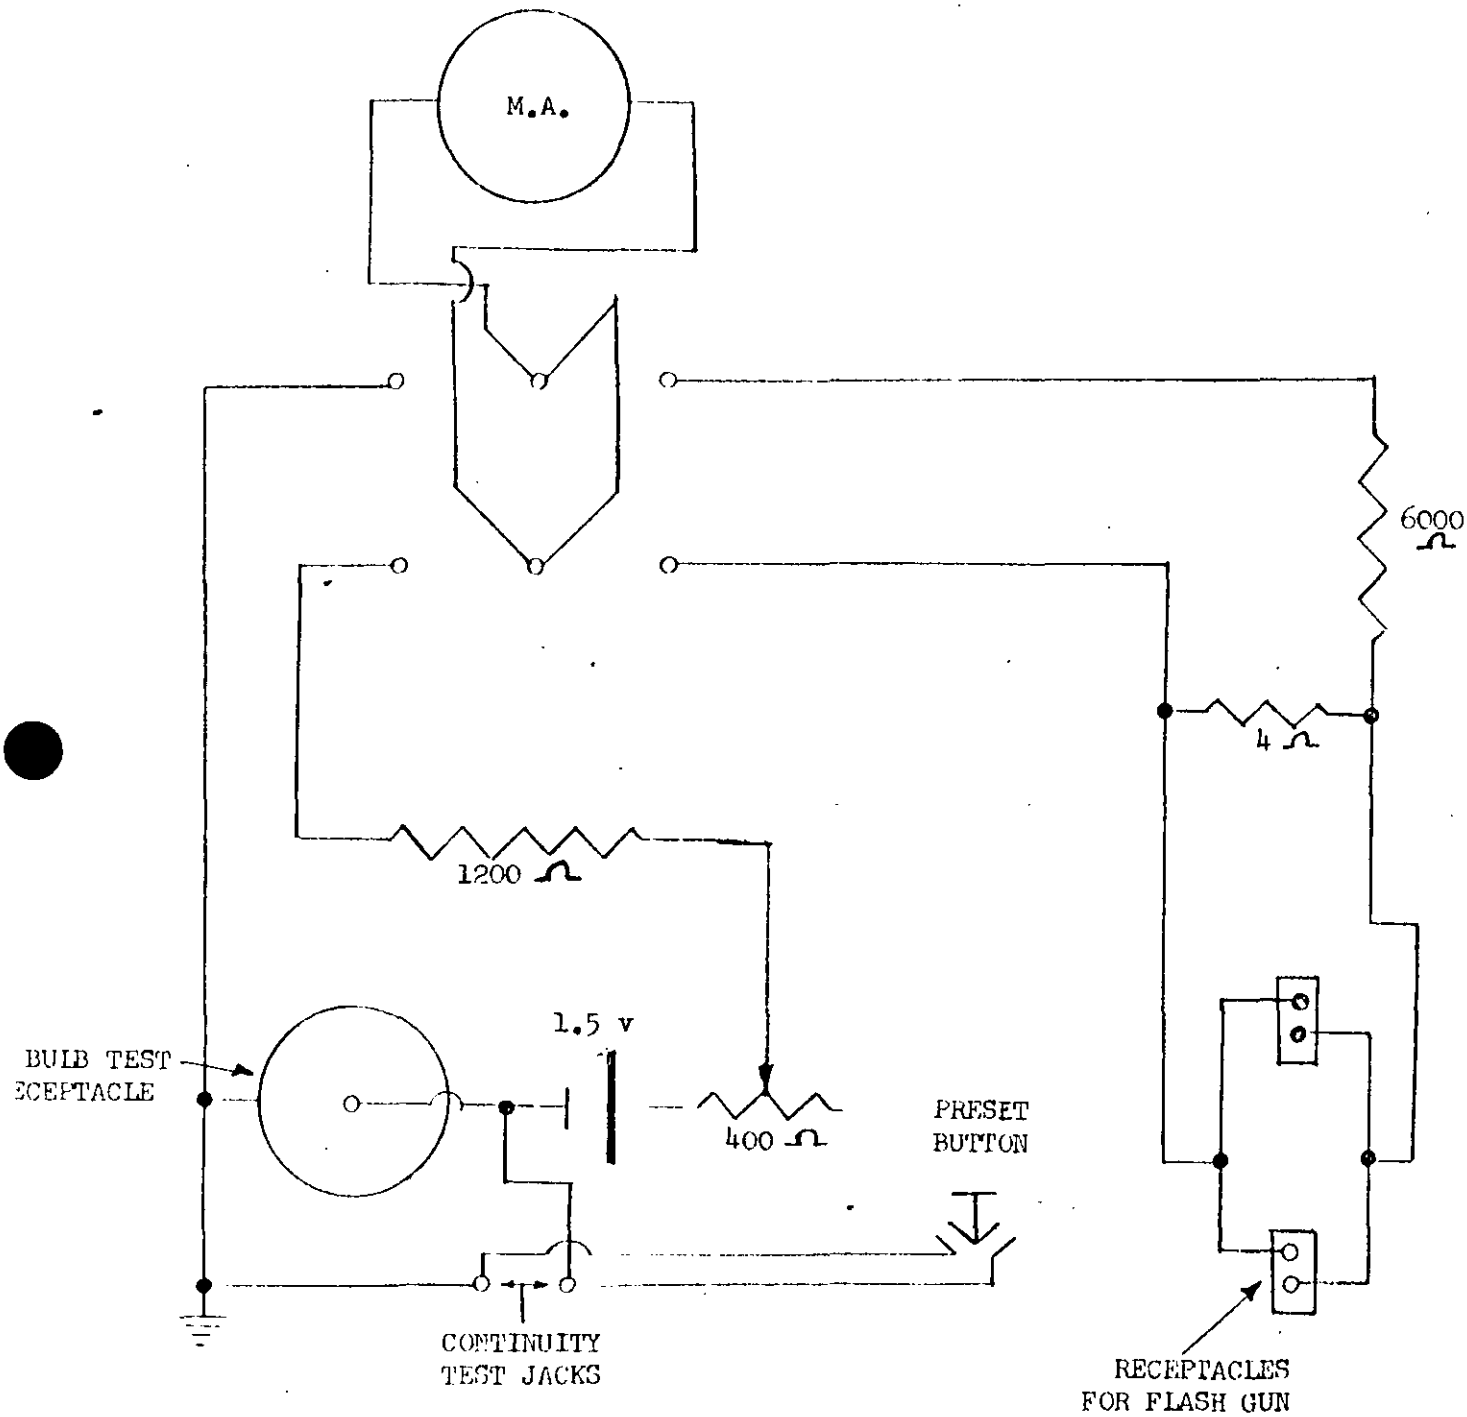

SCHEMATIC DIAGRAM
FOR
TESTER, FLASH GUN, PHOTOGRAPHIC IM-66( )

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.6 Resistors. - Resistors (tolerance ±5 percent) shall conform to the following:

a. Fixed - Specification MIL-R-10509
b. Variable - Specification MIL-R-94.

3.7 Meter. - The meter shall be a milliammeter type MR13S001DCMAR, conforming to Specification MIL-M-10304 except the scale markings shall be as specified in paragraph 3.7.1.

3.7.1 Scale markings. - The underside of the scale line shall contain marks at the 0.54 and 0.72 milliampere (ma) points. "3 cells" and "4 cells," respectively, shall be printed adjacent to these marks. At the 1 ma position, a line shall be marked "BULB TEST." The upper side of the scale line shall indicate "OHMS" in 100, 500, 1000, 10,000 and 100,000 positions.

3.8 Receptacles. - Two receptacles, one male and one female, shall be provided to accept flash gun connectors conforming to American Standards Association Standards for flash synchronizing equipment.

3.9 Cleaning. -

3.9.1 Parts. - After fabrication, parts shall be cleaned in accordance with good commercial practice, or as specified in an applicable document. Cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are mounted on chassis, panels, etc.

3.9.2 Units. - After assembly, units shall be cleaned thoroughly and shall be free from particles of solder, flux, and other foreign material. In addition, when necessary, such cleaning shall also be performed before final assembly of the units.

3.10 Finish, protective. - Equipment shall be given protective finish in accordance with Specification MIL-F-14072. This includes finish of hardware, such as hinges, screws, etc, and necessary touch up after mounting. The final paint film on type 1 surfaces shall be final film B, lusterless black enamel, conforming to Specification MIL-F-14072. (See 4.4.)

3.11 Marking. - Marking shall conform to Specification MIL-M-13231. (See 4.4.) Panel marking shall be group I as described in that specification.

3.11.1 Visibility. - Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.11.2 Serial numbers. - Each Tester, Flash Gun, Photographic LM-66( ) shall be serial numbered.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.11.3 Instruction label. - An instruction label shall be provided on the inside of the case cover and shall provide complete information for performing the following operations. (See 3.16.)

a. Checking the continuity of all sizes of flash bulbs.
b. Checking the continuity of various photoflash components, such as solenoids, connectors, and wiring.
c. Checking the condition of the batteries in the flash gun.
d. Checking the flash gun wiring for breaks.

3.12 Riveting. - Riveting shall not be used for mounting parts such as resistors. Thickness of countersunk metal which accepts the heads of flush rivets shall be not less than the height of the rivet heads. The distance from the centers of rivet holes to the edges of the material in which the holes are formed shall be at least 1-1/2 times the rivet diameter. After riveting, the joints shall be tight, the joined parts shall be undamaged, and the rivet heads shall be properly seated and tight against their bearing surfaces.

3.13 Soldering. -

3.13.1 Solder. - Solder shall conform to Specification QQ-S-571. For soldering electrical connections, composition SN60, type AR, or S, shall be used for general purposes; and composition SN62 or SN63, type AR or S, for special purposes. When type S solder is used for soldering electrical connections, the flux shall conform to Specification MIL-F-14256.

3.13.2 Acid or acid salts. - No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use.

3.13.3 Process. - There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting actions, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment; flux being spread over a larger area; or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.14 Wiring. - Wiring shall be neat and sturdy.

3.14.1 Slack. - Wires shall be as short as practical except that sufficient slack shall be provided for the following purposes:

(a) To enable parts to be removed and replaced during servicing without disconnecting other parts.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

(b) To provide for at least two replacements of the part to which the wire or cable is connected.

(c) To facilitate field repair of broken or cut wires.

3.14.2 Protection. - Wires shall be so placed and protected as to avoid contact, under specified service conditions, with rough or irregular surfaces or sharp edges. Wires shall not be bent sharply where they enter insulation material.

3.14.3 Splicing. - Wires in a continuous run between two terminals shall not be spliced during the wiring operation.

3.15 Interchangeability. - Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. (See 4.7.)

3.16 Operational. - When tested as specified in paragraph 4.9, Tester, Flash Gun, Photographic, LM-66( ) shall be capable of performing the following:

a. Checking the continuity of all sizes of flash bulbs. The reading on the meter shall not drop below 1 milliampere for good bulbs.

b. Checking the condition of the batteries in and out of the flash gun. The meter reading shall be 0.54 milliampere or more for 3 cell units and 0.72 milliampere or more for 4 cell units.

c. Checking the continuity of various photoflash components, such as solenoids, connectors, and wiring. A jumping meter needle shall indicate breaks in the wiring.

3.17 Service conditions. - The equipment shall meet the following service conditions — where a test is referenced, meeting the test shall be considered as compliance with the requirement:

3.17.1 Temperature (see 4.12). -

(a) Operating: Ambient temperature in the range of +125°F to -20°F. (The 125°F temperature includes effect of sun-load.) Exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 72 hours, at any one time,

(b) Nonoperating: Exposure in the range of +160°F to -80°F; exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 24 hours, at any one time.

3.17.2 Relative humidity (see 4.8). - Up to 97 percent relative humidity for 20 hours; and exposure at 100 percent relative humidity, with condensation, for 4 hours.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

3.17.3 Elevation (see 4.6). -

(a) Operating: Up to 10,000 feet above sea level.

(b) Nonoperating: Up to 50,000 feet above sea level.

3.17.4 Orientation, operating (see 4.10). - Any orientation up to 20 degrees from normal operating position (that is: forward, backward, left, or right).

3.17.5 Vibration, internal. - The amplitude of vibration of any part, subassembly, or structural member of the equipment shall not exceed twice the amplitude of the vibration applied to the equipment at any frequency between 10 and 55 cycles per second. (See 4.13.)

3.17.6 Shock, drop. - After being subjected to the test specified in 4.11, the equipment shall be operable and any physical damage shall be minor.

3.18 Technical literature. - Technical literature shall be furnished if specified in the contract. (See 6.2.)

3.19 Workmanship. - The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs herein:

3.9	Cleaning	3.14.1	Slack in wires.
3.12	Riveting	3.14.2	Protection for wires.
3.13.2	Flux and cleaning agents for soldering.	3.14.3	Splicing of wires.
3.13.3	Process for soldering		
3.14	Wiring and cabling		

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor's responsibility. - The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows:

(a) Preproduction inspection (does not include preparation for delivery.) (See 4.3.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

(b) Acceptance inspection.

(1) Acceptance inspection of equipment before preparation for delivery. (See 4.4 and 4.5.)

(2) Acceptance inspection of preparation for delivery (See 4.15.)

4.3 Preproduction inspection. - This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in Table I, the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for group A and group B. The preproduction inspection will normally be performed in this order: (1) vibration and (2) shock, drop; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Table I. - Preproduction Inspection

Inspection (For additional preproduction inspection see 4.3)	Req. Para.	Insp. Para.
Elevation	3.17.3	4.6
Moisture resistance	3.17.2	4.8
Orientation	3.17.4	4.10
Shock, drop	3.17.6	4.11
Temperature	3.17.1	4.12
Vibration	3.17.5	4.13

4.4 Acceptance Inspection covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary document as part of the acceptance inspection before preparation for delivery:

Item	Where required
Finish	3.10
Marking	3.11

4.5 Acceptance inspection of equipment before preparation for delivery. - The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.3. Test equipment, when required for Government verification inspection, shall be made available by the contractor.

4.5.1 Group A inspection. - This inspection, including sampling, shall conform to Table II and the ordinary inspection procedures of Standard MIL-STD-105. Group A inspection shall be performed in any order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

Table II. - Group A inspection

Inspection	Req. Para.	Insp. Para.	AQL Major	AQL Minor
Visual and Mechanical	3.19	4.14	1%	4%
Operational				
Flash bulb continuity	3.16	4.9)	1.0%	*
Battery Condition	3.16	4.9)	for the	
Component Continuity	3.16	4.9)	group	

*All operational defects are considered major.

4.5.2 Group B inspection. - This inspection shall consist of the inspection specified for interchangeability in paragraph 4.7. The inspection, including sampling, shall conform to the special procedures for small-sample inspection of Standard MIL-STD-105. The AQL shall be 6.5 percent defective and the inspection level shall be L-7 for normal and tightened inspection and L-5 for reduced inspection. The reduced inspection procedure shall be R-1. Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection.

4.5.3 Reinspection of conforming group B sample Units. - Unless otherwise specified sample units which have been subjected to and passed group B inspection may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.6 Elevation test (see 3.17.3). - The equipment, placed in its normal operating position in an altitude chamber, shall be tested as follows: (Note: To check temperature stabilization, place a thermocouple on the largest internal mass centrally located within the equipment.)

(a) With the equipment placed in the chamber, operating and stabilized at room temperature, take the following measurements:

Paragraph	Measurement
4.9	Operation

(b) Reduce the barometric pressure to 20.6 ± 0.1 inches of mercury (simulated 10,000 feet above sea level) and, after stabilization, repeat the measurements specified in 4.6(a). The equipment shall meet specified performance for those measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

(c) Remove the battery from the equipment and further reduce the barometric pressure to 3.4 ±0.1 inches of mercury (simulated 50,000 feet above sea level). Maintain this condition for 1 hour.

(d) Return the chamber to ambient pressure. Return the battery to the equipment and, after stabilization, repeat the measurements specified in 4.6(a). The equipment shall meet performance for these measurements.

4.7 Interchangeability. - The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.15. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) Location of hinges and fastener on cover and case.
(b) Size and distance between centers of pins on male receptacle for flash gun connectors.
(c) Diameter, depth, and distance between centers of sockets on female receptacle for flash gun connectors.
(d) Diameter and depth of jacks for test leads.

4.8 Moisture-resistance test (see 3.17.2). - The equipment shall be tested as follows:

4.8.1 Test conditions. - Do not move equipment from the humidity chamber for measurements. Install the battery in the equipment only when making measurements.

4.8.2 Test methods. -

(a) Dry at 130° ±5°F for 24 hours.
(b) Condition at 77° ±5°F and 40 to 50 percent relative humidity for 24 hours.
(c) Take measurements as specified in 4.8.3.
(d) Subject to continuous cycling for five 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to Standard MIL-STD-170. The measurements specified in 4.8.3 shall be made during the periods shown on the standard and shall comply with 4.8.3.
(e) After cycling has been completed, condition the equipment for 24 hours at 77° ±5°F and 40 to 60 percent relative humidity. No repair or replacement of parts shall be made. The equipment shall meet full specified performance for those measurements specified in 4.8.3.

4.8.3 Performance. - Measurements made during test and specified performance during cycling shall be as follows:

Paragraph	Measurement	Performance during cycling
4.9	Operation	Full specification requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the current version before use.

4.8.4 Failure. - If any equipment fails to meet the performance specified in 4.8.3 during cycling, it does not pass the test. In addition, if the equipment fails to meet full specification requirements after conditioning as specified in 4.8.2(e), it does not pass the test.

4.9 Operational. - Tester, Flash Gun, Photographic, LM-66( ) shall be tested as follows to determine compliance with the requirements specified in paragraph 3.16.

4.9.1 Flash bulb continuity. - The continuity of all sizes of flash bulbs shall be tested as follows:

a. Throw toggle switch to the right.

b. Depress preset button.

c. Set meter to read one milliampere by rotating control knob.

d. Release preset button.

e. Insert lamp in receptacle, press down lightly and tilt slightly sidewise.

f. The meter reading shall be as specified in paragraph 3.16.

g. Repeat "e" above using a flash bulb in which the continuity has been broken.

4.9.2 Component continuity. - The continuity of flash system components shall be tested as follows:

a. Perform steps "a" through "d" specified in 4.9.1 above.

b. Insert test leads in pin jacks.

c. Place probes across circuit to be checked.

CAUTION: Be certain that no battery or other voltage source is connected to the circuit under test.

4.9.3 Battery and flash gun wiring. - The condition of the batteries and the continuity of the flash gun wiring shall be tested as follows:

a. Throw toggle switch to the left.

b. Connect flash gun power cord to appropriate receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

c. Press firing button on gun.

d. Read meter to determine battery condition. The meter reading shall be as specified in paragraph 3.16.

e. Press firing button and shack cords to check for concealed breaks in wiring, poor contacts, etc.

4.10 Orientation test, (see 3.17.4). - The equipment shall be inclined for a minimum of 5 minutes in each plane (forward, backward, left, and right), to an angle of 20 $^{+3}_{-1}$ degrees. During inclination in each plane, the equipment shall meet specified performance for the following measurements:

Paragraph	Measurement
4.9	Operation

4.11 Shock, drop. - The equipment shall be dropped a distance of three feet on each face, edge and corner for a total of 26 drops. Drops shall be made from a quick-release hook or a pendulum tester as made by the L.A.B. Corporation, Skaneateles, New York, or equal. The floor or barrier receiving the impact shall be of 2-inch fir backed by concrete or a rigid steel frame. (See 3.17.6).

4.12 Temperature test, (see 3.17.1). - The equipment shall be subjected to the temperature cycle shown on Standard MIL-STD-169. The battery shall be installed in the equipment only when making measurements. Performance shall be as follows:

Step	Paragraph	Measurement	Performance
1, 4, -20°, 10	4.9	Operation	Full specification requirements

4.13 Test for internal vibration. - Internal vibration of the equipment shall be measured as follows, to determine conformance to 3.17.5:

(a) Secure the equipment directly to a vibration table that can be controlled within 10 percent of the specified amplitude. Mounting method shall be such that vibration within the equipment can be observed and measured. To facilitate this observation and measurement, subassemblies may be tested separately provided they are secured to the table in a manner similar to that used to mount them in the equipment.

(b) Vibrate the equipment successively in three mutually perpendicular directions over a frequency range of 10 to 55 cycles per second. The total excursion of the applied vibration shall be not less than 0.030 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

(c) In each of the three directions, change the frequency in steps of one cycle per second and maintain each frequency for at least 10 seconds.

(d) Measure vibration amplitudes by optical means, or by other means provided that vibration of the part is not affected by the measurement.

4.14 Visual and mechanical. - Equipment shall be examined for the defects listed in Standard MIL-STD-252.

4.15 Acceptance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging. -

5.1.1 Level A. - Tester, Flash Gun, Photographic, LM-66( ), shall be preserved, packaged and tested in accordance with the applicable provisions of Specification MIL-P-116 and in a manner that will afford adequate protection against corrosion, deterioration, and damage during world-wide shipment, handling and open storage.

5.1.2 Level C. - Tester, Flash Gun, Photographic, LM-66( ), shall be afforded preservation and packaging in accordance with the suppliers' normal commercial practice.

5.2 Packing. - Tester, Flash Gun, Photographic, LM-66( ), packaged as specified, shall be packed in shipping containers conforming to the requirements of the specifications referenced below for the designated level. The gross weight shall not exceed the weight shown unless an individually packed item exceeds that amount. Closure and strapping shall be as prescribed in the applicable box specification or appendix thereto, except that the bands of reinforced, pressure-sensitive adhesive tape, 1/2 inch wide and conforming to Specification PPP-T-97 for Grade IV, shall be used for fiberboard boxes in lieu of metal strapping.

5.2.1 Level A. -

BOX SPECIFICATION		MAX. GROSS WT.
Fiberboard (Type I, Class 2)	PPP-B-636	Table VI
Nailed Wood (Style 4, Class 2)	PPP-B-621	200 lbs.
Wirebound (Style 2 or 3, Class 2)	PPP-B-585	200 lbs.
Wood Cleated Fiberboard (Overseas)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Overseas)	PPP-B-601	200 lbs.
Wood Cleated Veneer, Paper Overlaid (Overseas)	MIL-B-10377	200 lbs.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. -

BOX SPECIFICATION		MAX. GROSS WT.
Fiberboard (Type I, Class 1	PPP-B-636	Table I
Nailed Wood (Style 4, Class 1)	PPP-B-621	200 lbs.
Wirebound (Style 3, Class 1)	PPP-B-585	200 lbs.
Wood Cleated Fiberboard (Domestic)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Domestic)	PPP-B-601	200 lbs.
Wood Cleated, Veneer, Paper Overlaid (Overseas)	MIL-B-10377	200 lbs.

5.2.3 Level C. - Tester, Flash Gun, Photographic, LM-66( ), shall be packed in containers of the type, size and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination at lowest rate. Shipping containers shall comply with the Uniform Freight Classification Rules or Regulations of other carriers as applicable to the mode of transportation.

5.2.4 Pilot Pack. - When Level "A" packaging and packing is specified above, one acceptable model of Tester, Flash Gun, Photographic LM-66( ), will be pilot packed in a manner that will pass the preproduction test prescribed in Specification MIL-P-116. Illustrations of the packaging and packing procedure, together with Bills of Material, will be prepared and furnished in accordance with the provisions of the Signal Corps Drawing No. SC-A-362100.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL-STD-129.

6. NOTES

6.1 Intended use. - Tester, Flash Gun, Photographic LM-66( ) is intended to be used by photographers to test the condition of flash gun batteries (in or out of the flash gun), and to check continuity of flash bulbs such as GE5, GE11, GE22 and their equivalents, of the photo-flash circuit of any camera sets utilizing the above types of flash bulbs.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Level of packaging and level of packing required for shipment. (Level A, level B, or level C.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

(c) Preproduction pack(s) as follows:

Makeup of pack(s).
Number of each kind of pack to be submitted.
Inspection to be performed thereon.

(d) Marking and shipping of samples.

(e) Place of final inspection.

(f) Technical literature required. (See 3.18.)

6.3 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: LM-66W. The contractor should apply for nomenclature in accordance with the applicable clause in the contract. (See 1.1).

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.