INCH-POUND

MIL-C-44371A
30 September 1991
SUPERSEDING
MIL-C-44371
5 June 1989

MILITARY SPECIFICATION

* COAT, AIRCREW, COMBAT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a plain weave, aramid, combat coat for wear by aircrew personnel.

* 1.2 Classification. The coat shall be of the following classes and sizes as specified (see 6.2).

Class 1 - Woodland Camouflage
Class 2 - Tan 380

Schedule of sizes

X-Small	Small	Medium	Large	X-Large
Short	Short	Short	Short	Short
Regular	Regular	Regular	Regular	Regular
Long	Long	Long	Long	Long

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
A-A-50195	-	Thread, Aramid
A-A-50198	-	Thread, Gimp, Cotton, Buttonhole
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
V-B-871	-	Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	-	Fasteners, Slide, Interlocking
DDD-L-20	-	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-W-5664	-	Webbing, Textile, Elastic
MIL-F-21840	-	Fastener Tapes, Hook and Loop, Synthetic
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43709	-	Tape, Textile, Aramid
MIL-T-44100	-	Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-C-83429	-	Cloth, Plain and Basket Weave, Aramid

STANDARDS

FEDERAL

FED-STD-595	-	Colors Used in Government Procurement
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC Photographic Comparative Rating of Single and Double Needle Seams (Method 88B, two photos)

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 3.2.1 Basic material. The basic material for the class 1 coat shall be plain weave aramid printed with a Woodland Camouflage Pattern conforming to type II, class 5 of MIL-C-83429. The basic material for the class 2 coat shall be plain weave aramid conforming to type II, class 6 of MIL-C-83429. The color for the class 2 shall be Tan 380.

* 3.2.2 Material for pencil pockets. The cloth for the pencil pockets shall be basic material, ground shade cloth, or printed seconds cloth. The cloth for class 1 shall be colored to a ground shade conforming to class 5 of MIL-C-83429 prior to overprinting of the camouflage pattern. Ground shade cloth shall meet the physical, mechanical and dimensional requirements of the respective finished fabric. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage print patterns cited in MIL-C-83429 for the class 1 coat.

3.2.3 Webbing, elastic. The webbing for the waist elastic shall be bleached or unbleached and shall conform to type I, class 2 of MIL-W-5664, except shuttleless loom construction is permitted. The width of the webbing shall be 1-1/2 inches.

* 3.2.4 Hook and loop fastener tape. The hook and loop fastener tapes shall be 5/8, 1 and 1-1/2 inches (as specified) in width and shall conform to type I, class 1 of MIL-F-21840. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. The colorfastness requirements shall not apply.

3.2.5 Slide fastener. The slide fasteners listed below shall be an automatic lock left hand, separating type brass with a black chemical finish and conform to type IV, style 8, size MS of V-F-106.

Slide fastener lengths (inches)

Size	Length
X-Small - Short	15
X-Small - Regular	15-1/2
X-Small - Long	16
Small - Short	15-1/2
Small - Regular	16
Small - Long	16-1/2
Medium - Short	16
Medium - Regular	16-1/2
Medium - Long	17
Large - Short	16-1/2
Large - Regular	17
Large - Long	17-1/2
X-Large - Short	17
X-Large - Regular	17-1/2
X-Large - Long	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.2.5.1 Pencil and utility pocket. The slide fastener for the pencil and utility pocket shall conform to type I, style 7, size M, short tab pull, 4-3/4 inch chain of V-F-106.

* 3.2.5.2 Slide fastener tape. The slide fastener tape shall be aramid, 3/4 inch wide and shall be of sufficient length to comply with the slide fastener attachment operation (see table I, operation 21). The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. The finished tape shall show colorfastness to light and laundering equal to or better than the standard sample. When no standard sample is available, the tape shall show "fair" fastness to light after 6 standard fading hours, and "good" fastness to laundering.

* 3.2.5.3 Slide fastener thongs. Each slide fastener shall be furnished with a thong of sufficient length to measure 2-1/2 to 3 inches (folded) when attached to the slider pull tab. The thongs shall be 1/4 inch wide conforming to MIL-T-43709. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. Ends of the thongs shall be seared or dipped in a colorless, non-combustible resin (see 6.5). The thong shall be attached to slider pull tab as specified in table I, operation 5.

* 3.2.6 Button. The button for the neck closure shall conform to type II, class D, style 26, 30-line of V-B-871. The color for class 1 shall be Olive Green BP, Cable No. 62016 and for class 2 shall be Tan AJ, Cable No. 62028. The button shall have a dull finish.

* 3.2.7 Gimp. The cotton gimp for reinforcing the neck closure buttonhole shall conform to type I or II, size No. 8 of A-A-50198. The color for class 1 shall be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380.

3.2.8 Thread.

* 3.2.8.1 Aramid and para-aramid. The thread shall be aramid, 40 and 60 tex conforming to A-A-50195. Para-aramid spun staple thread, size T-35 for class 1 and size T-50 for class 2, conforming to MIL-T-44100 may be used as an alternate to aramid 40 and 60 tex. The color of the thread for class 1 shall be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380. The thread shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering.

* 3.2.8.2 Cotton-covered polyester core. Cotton-covered polyester core thread conforming to ticket No. 50, 2 ply of A-A-50199 may be used as an alternate thread for bartacking. The color of the thread for class 1 shall be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380, and shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 3.2.9 Labels. Each coat shall have an identification label, an instruction label, and a size label or a combination identification and instruction label. The labels shall conform to the requirements listed below. The color of the label for class 1 shall be Medium Green, Cable No. 70034, 70130 or 70131 and the color for class 2 shall be Khaki, Cable No. 70188. The fastness to laundering requirements of DDD-L-20 shall apply.

* 3.2.9.1 Identification label. The identification label shall conform to type VI, class 1 of DDD-L-20.

* 3.2.9.2 Instruction label. The instruction label shall conform to type VI, class 3 of DDD-L-20. The label shall contain the following information:

COAT, AIRCREW, COMBAT

1. Wear outside of trousers.

2. This coat is of low flammability. No other special flame resistant treatment is required.

3. Hand/Machine Washing: Permanent press cycle in warm water with a mild laundry detergent.

4. DO NOT STARCH OR USE CHLORINE BLEACH.

5. Rinsing: Rinse thoroughly in clear warm water after laundering. Detergent must be removed or fabric flame resistance will be reduced.

6. Drying: Tumble dry at low heat (130°F). Remove immediately from dryer. To drip dry, remove from water and place on a rustproof hanger.

7. WARNING: Launder with the slide fastener and hook and loop fasteners engaged. Do not press hook and loop fasteners.

DO NOT REMOVE THIS LABEL

* 3.2.9.3 Combination label. A combination identification/instruction label may be used. It shall conform to type VI, class 15 of DDD-L-20.

* 3.2.9.4 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The size information shall be printed with not less than 10 point characters and shall contain the following information, as applicable:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

X-Small - Short	X-Small - Regular	X-Small - Long
Height: From 63 to 67 in.	Height: From 67 to 71 in.	Height: From 71 to 75 in.
Chest: Up to 33 in.	Chest: Up to 33 in.	Chest: Up to 33 in.
Stock No.	Stock No.	Stock No.
NATO Size: 6070/7484	NATO Size: 7080/7484	NATO Size: 8090/7484
Small - Short	**Small - Regular**	**Small - Long**
Height: From 63 to 67 in.	Height: From 67 to 71 in.	Height: From 71 to 75 in.
Chest: From 33 to 37 in.	Chest: From 33 to 37 in.	Chest: From 33 to 37 in.
Stock No.	Stock No.	Stock No.
NATO Size: 6070/8494	NATO Size: 7080/8494	NATO Size: 8090/8494
Medium - Short	**Medium - Regular**	**Medium - Long**
Height: From 63 to 67 in.	Height: From 67 to 71 in.	Height: From 71 to 75 in.
Chest: From 37 to 41 in.	Chest: From 37 to 41 in.	Chest: From 37 to 41 in.
Stock No.	Stock No.	Stock No.
NATO Size: 6070/9404	NATO Size: 7080/9404	NATO Size: 8090/9404
Large - Short	**Large - Regular**	**Large - Long**
Height: From 63 to 67 in.	Height: From 67 to 71 in.	Height: From 71 to 75 in.
Chest: From 41 to 45 in.	Chest: From 41 to 45 in.	Chest: From 41 to 45 in.
Stock No.	Stock No.	Stock No.
NATO Size: 6070/0414	NATO Size: 7080/0414	NATO Size: 8090/0414
X-Large - Short	**X-Large - Regular**	**X-Large - Long**
Height: From 63 to 67 in.	Height: From 67 to 71 in.	Height: From 71 to 75 in.
Chest: Above 45 in.	Chest: Above 45 in.	Chest: Above 45 in.
Stock No.	Stock No.	Stock No.
NATO Size: 6070/1424	NATO Size: 7080/1424	NATO Size: 8090/1424

3.3 Design. The coat is of a "bush type" design with two chest and two lower patch pockets with flaps, left sleeve utility pocket, hook and loop fastener tape adjustment tabs for the waist, collar and wrist, and a slide fastener front closure. The coat also has two openings with flaps to allow through passage of a microclimate air hose.

3.4 Figure. Figure 1 is furnished for information only. If there are any inconsistencies between the written specification and the figure, the written specification shall control.

3.5 Patterns. Standard patterns, which provide a 1/2 + 1/8, -0 inch seam allowance for double-lapped and double-stitched seams 3/8 + 1/8, -0 inch seam allowance for single needle seams, except where otherwise specified, will be furnished by the Government. The standard patterns shall not be altered in any

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

* 3.5.1 List of pattern parts. The components of the coat shall be cut from material in accordance with the pattern parts indicated below.

List of pattern parts

Material	Nomenclature	Cut parts
Aramid, plain weave	Front	2
	Back	1
	Collar	2
	Collar (one-piece) 1/	1
	Top sleeve	2
	Under sleeve	2
	Chest pocket	2
	Chest pocket flap	2
	Chest pencil pocket	1
	Lower pocket	2
	Lower pocket flap	2
	Air hose opening flap	2
	Air hose opening facing	2
	Waist tunnel	1
	Waist adjustment tab	2
	Wrist adjustment tab	4
	Wrist adjustment tab (one piece) 2/	2
	Utility pocket	1
	Utility pocket flap	1
	Upper pencil pocket (utility pocket)	1
	Lower pencil pocket (utility pocket)	1
	Slide fastener flap (utility pocket)	1
	Collar tab	2
	Template	
	Airhose opening	

1/ When alternate one-piece collar is used, disregard separate collar piece.

2/ When alternate one-piece wrist adjustment tab is used, disregard separate wrist adjustment tab piece.

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams and stitching. All stitches, seams, and stitching types specified in table I shall conform to FED-STD-751. When two or more methods of seams or stitch types are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the coat. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. The guides and knives on the overedge machines shall be set to trim only the ravelled ends of the fabric. Seams required to be worked out having a depth between the fold of 1/8 inch or more shall be considered a defect.

3.6.2 Type 301 stitching. Ends of stitching shall be backstitched or over-stitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch except on labels where a minimum of a three stitch overlap is required. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or runoff stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. When damaged thread has been removed, needle holes do not constitute damage to the material. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.6.2.2 Repairs of types 401, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.2.1.a and 3.6.2.1.b. Repairs to stitch type 401 may be accomplished by using stitch type 301, except when used for eyelets.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.6.4 Buttonholes. The buttonhole on the coat left front lapel shall be eyelet end tapered bar type worked over gimp as specified in 3.2.7. The purling shall be on the outside of the coat. The cut length shall be 3/4 to 7/8 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric.

3.6.5 Bartacks. The bartacks shall measure 3/8 to 1/2 inch in length and be free from thread breaks and loose stitching.

3.6.6 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table I, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.6.7 Thread ends. All thread ends that are visible on the finished coat shall be trimmed to a length of not more than 1/4 inch.

3.7 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the coat.

3.8 Manufacturing operations requirements. The coat shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show in the finished coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Cut coat in strict accordance with patterns furnished, which show size, shape, directional lines, placement of pockets, and notches for the proper assembling of all parts.						
	b. Cut top collar with long dimension across the material. The undercollar may be cut in the warp or filling direction. When option to cut one-piece collar is used, the long dimension shall be across the material.						
*	c. Cut all parts of the coat out of one piece of material, except the undercollar, chest pencil pocket, air hose opening facing, collar tab and slide fastener thongs which may be cut from ends.						
	d. Cut the slide fastener thongs to conform to the measurements specified in operations 4 and 5.						
	e. Cut the hook and loop portions of fastener tape in the following lengths:						
	(1) Chest pockets (two each of hook and loop) - 4-3/8 ± 1/8 inches (1 inch wide tape).						
	(2) Lower pockets (two each of hook and loop) - 5-5/8 ± 1/8 inches (1 inch wide tape).						
*	(3) Collar tab and collar (two each hook and loop) - 2-1/2 ± 1/8 inches (1 inch wide tape).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) (4) Coat flap closure (three each of hook and loop) - 2 ± 1/8 inches (5/8 inch wide tape). (5) Waist adjustment tabs (two each of hook and loop) - Hook portion 2-1/2 ± 1/8 inches and loop portion 5 ± 1/8 inches (1-1/2 inch wide tape). (6) Wrist adjustment tabs (two each of hook and loop) - Hook portion 2-1/2 ± 1/8 inches and loop portion 7 ± 1/8 inches (1 inch wide tape).						
*	(7) Air hose opening (six each of hook) - Four horizontal hook portions 2-7/8 ± 1/8 inches and two vertical hook portions 2-1/8 ± 1/8 inches (5/8 inch wide tape).						
*	(8) Air hose opening flap (six each of loop) - Four horizontal loop portions 2-7/8 ± 1/8 inches and two vertical loop portions 2-1/8 ± 1/8 inches (5/8 inch wide tape).						
*	(9) Utility pocket and flap (one each of hook and loop) - 2-1/8 ± 1/8 inches (1 inch wide tape).						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process components having material defects or damages that are classified as defects in table III shall be removed from production and replaced with nondefective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking.						
	a. Mark, ticket, or bundle all component parts to ensure correct size, proper assembly and uniform shade throughout the coat.						
	b. Any method of marking may be used except:						
	(1) Metal fastening devices.						
	(2) Sew-on tickets.						
	(3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.						
	c. The use of an ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the coat.						
4.	Make slide fastener thongs.						
	a. Fold thong in half lengthwise with the raw edges turned in and stitch 1/16 to 1/8 inch from the turned under edge.	301	EFp-2	10-14	60	60	
	or						
	b. Fold under side raw edges with edges abutted or overlapped and double-stitch the length of the tape with a 1/4 inch gage.	406	EFh-1	10-14	60	40	
	c. The thongs shall finish 1/4 ± 1/8 inch wide.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach thongs to slide fastener pull tabs.						
	a. Cut the thongs 5-1/2 ± 1/2 inches in length.						
	b. Thread one end of thong through end of slide fastener pull tab and with ends even, bartack together with two vertical bartacks 1/2 to 3/8 inch apart, with the end of the top bartack 1/4 to 1/2 inch from the end of the slide fastener pull.	Bartack		28 per bartack	40 or 50	40 or 50	
6.	Labels.						
	Sew labels to coat on all four sides with stitching not more than 3/16 inch from edge of label. Stitching shall not be through writing on the label. Locate label as follows:	301	LSbj-1	10-14	60	60	
	a. Identification label. The identification label shall be placed on the inside of left front with the label stitching covered by the lower pocket.						
	b. Size label. The size label shall be placed on the center back, 1/2 to 3/4 inch down from the collar joining seam or top edge may be caught securely in the undercollar joining seam. The label shall be centered and towards the wearer in the finished coat.						
	c. Instruction label. The instruction label shall be placed on the inside of the right front with the label stitching covered by the lower pocket.						
	d. Combination identification and instruction label. Attach as specified in 6.c. above.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*7.	Make collar tab.						
*	a. Superimpose collar tab pieces and stitch around top, front and bottom edges, leaving the narrow end of tab open for turning.	301 or 401	SSe-2(a)	10-12 10-12	60 40	60 40	
	b. Trim corner, turn, work out edges and top stitch 1/8 to 3/16 inch from edges.	301	SSe-2(b)	10-12	60	60	
*	c. Position two 1 inch wide loop tapes (one on each side of tab) to the front end of the tab, as indicated by marks on pattern, and stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-12	60	60	
8.	Make facings. Finished appearance. The fronts shall be even in length with the facings neither tight, short, twisted or too full. The lapel steps shall be even in length.						
	a. Seam top edge of each lapel, slash seam allowance at collar notch, turn, work out corners, and single stitch beginning at collar notch 3/16 to 1/4 inch from edge; continue across step and down front edge to the bottom of coat 3/16 to 1/4 inch from front edge.	301 and 301	SSe-2 OSf-1	10-14 10-14	60 60	60 60	
	b. Turn under back edge of right and left facings and single stitch through front, 1/16 to 1/8 inch from turned edge. or	301	EFb-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make facings. (cont'd)						
	c. Overedge stitch the back edge of right and left facings and single stitch through front 1/8 to 1/4 inch from edge.	503 or 504 and 301	EFd-1 and EFa-1	6-10 10-14	60 60	40 60	
	d. Position three 5/8 inch wide loop fastener tapes on the inside of left facing, as indicated on patterns and stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-12	60	60	
	e. Mark the position and make buttonhole in left lapel, parallel with the top edge, as indicated on pattern. The inside edge of the eyelet shall finish 5/8 to 3/4 inch from the front edge of the coat.	Button-hole		52-56 per buttonhole	60	60	
9.	Make collar.						
	a. Position the two 1 inch wide hook fastener tapes on undercollar, as indicated on pattern, and stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-12	60	60	
*	b. Position collar tab on undercollar, as indicated by marks on patterns, with finished end towards back of collar and stitch 1/4 ± 1/16 from overedged edge. Turn collar tab to finished position and raise stitch 1/4 to 3/8 inch from turned edge.	301 301	LSbk-2(a) and LSbk-2(b)	10-12 10-12	60 60	60 60	
	c. Position the top collar and the undercollar face to face, and stitch along top and side edges. Trim, turn, work out points and edges and top stitch 1/4 ± 1/16 inch from top and side edges.	301 or 401 and 301	SSe-2(a) SSe-2(b)	10-14 10-14	60 60 60	60 40 60	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make collar. (cont'd)						
	d. When collar is cut in one piece, fold collar in half lengthwise and stitch side edges, trim corners, turn, work out points and edges and top stitch 1/4 ± 1/16 inch from side and top edges.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	10-14 10-14 10-14	60 60 60	60 40 60	
*10.	Make chest, lower, and utility pocket flaps.						
	Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat, without twists, gathers, puckers, pleats, or raw edges.						
	a. Fold pocket flap in half, with fabric face to face, and raw edges even and stitch 1/4 ± 1/16 inch from the edges, leaving the top raw edges open.	301	SSe-2(a)	10-14	60	60	
	b. Turn flap right side out and work out edges. Top stitch side and bottom edges 1/4 ± 1/16 inch from edges.	301	SSe-2(b)	10-14	60	60	
	c. Overedge stitch the top raw edges of each pocket flap together.	503 or 504	SSa-1	6-10	40	40	
	d. Double stitch 3/16 to 1/4 inch gage, the top folded edge of left chest pocket at pencil opening (see operation 23.a).	301	OSf-2	10-14	60	60	
*	e. Position one loop portion of fastener tape to chest and lower pocket flaps as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*10.	Make chest, lower and utility pocket flaps. (cont'd)						
*	f. Position one hook portion of fastener tape to the utility pocket flap as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
11.	Make chest and lower pockets.						
	a. Turn under top of pocket 1/4 ± 1/16 inch. Hem top of each pocket as indicated on pattern and stitch 1/16 to 1/8 inch from folded edge.	301	EFb-1	10-14	60	60	
	b. Position one hook portion of fastener tape to each pocket as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
*	c. Raw edges of pockets may be prehemmed prior to attachment to coat. On the lower pockets, fold up the pleat at the bottom of the pockets as indicated by marks on patterns. The side and bottom edges may be turned under 3/8 inch and stitched 1/16 to 1/8 inch from the edge.	301	EFa-1	8-10	60	60	
12.	Make wrist adjustment tabs.						
	a. Stitch wrist adjustment tabs, face to face, leaving the short straight end unstitched. Turn, work out edges and top stitch 1/4 ± 1/16 inch from all edges. The tab shall finish 1-3/4 ± 1/8 inches wide.	301	SSe-2(a)	10-14	60	60	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make wrist adjustment tabs. (cont'd)						
	b. Overedge stitch the two raw edges of wrist adjustment tab together.	503 or 504	SSa-1	6-10 6-10	60 40	40 40	
	c. Crease all sides of one piece tab. Fold tab in half lengthwise and double stitch tab together around sides and points 1/16 to 1/8 inch from edges. The tab shall finish 1-3/4 ± 1/8 inches wide.	301	SSc-2	10-14	60	60	
	d. Position hook fastener tape on tab, as indicated on pattern. Stitch on all four sides, 1/16 to 3/32 inch from the edge of tape.	301	LSbj-1	10-14	60	60	
13.	Cut waist elastic and make waist adjustment tabs and attach together.						
	a. Cut 1-1/2 inch elastic webbing for waist 6 ± 1/2 inches long.						
	b. Stitch waist adjustment tabs, face to face, leaving one end open. Turn, work out edges and top stitch 1/4 ± 1/16 inch from all edges. The tab shall finish 1-3/4 ± 1/8 inches wide.	301	SSe-2(a)	10-14	60	60	
	c. Overedge stitch the two open ends of waist adjustment tab together.	503 or 504	SSa-1	6-10	40	40	
	d. Position hook fastener tape on waist adjustment tab, as indicated on pattern. Stitch on all four sides, 1/16 to 3/32 inch from the edge of tape.	301	LSbj-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Cut waist elastic and make waist adjustment tabs and attach together. (cont'd)						
	e. Overlap raw edge of webbing and overedged edge of waist adjustment tab 1/2 ± 1/16 inch with top and bottom sides even. Stitch through overlap with a 1-1/4 ± 1/16 inch box stitch centered on the overlap.	301	LSa-2	10-14	60	60	
14.	Make waist tunnel.						
	Turn in side edges (shortest in length) of waist tunnel 3/8 ± 1/16 inch and with raw edges turned in, stitch 3/16 to 1/4 inch from turned in edge.	301	EFb-1	10-14	60	60	
15.	Attach waist elastic and waist adjustment tabs and waist tunnel to back of coat.						
	a. Position waist elastic and waist adjustment tabs on coat back as indicated on pattern. Place the waist tunnel over the waist elastic and place a vertical stitch as indicated on pattern.	301	SSv-1	10-14	60	60	
	b. Turn in top and bottom raw edges of waist tunnel. Stitch waist tunnel on to coat back with two rows of stitching 3/16 to 1/4 inch apart. Both ends of waist tunnel will be left open (unstitched).	301	LSd-2	10-14	60	60	
*16.	Position loop to coat front for waist adjustment tabs.						
*	Position loop on coat front for waist adjustment tabs, as indicated on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make air hose opening on coat fronts.						
	a. Place air hose opening facing on coat front, as indicated on pattern.						
	b. Stitch air hose opening facing to coat front, as indicated on pattern. Trim center of opening and clip each point of the square, being careful not to cut through the stitching.	301	LSbj-1	10-14	60	60	
	c. Turn facing to inside of coat and stitch 1/16 inch from opening edges. Turn in raw edges of facing 1/4 to 3/8 inch and stitch facing to coat front 1/16 inch from edge.	301	LSbj-1	10-14	60	60	
	d. On coat front, position the two horizontal and one vertical pieces of 1/2 inch hook fastener tape, around air hose opening, as indicated on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
18.	Make and attach air hose opening flaps.						
	a. Fold air hose opening flap in half, face to face and stitch along top and bottom edges. Leave side edge open in order to turn flap right side out. Turn, work out edges and top stitch around flap on three sides 1/16 inch from edge.	301	LSbj-1	10-14	60	60	
	b. Overedge the raw edges of the air hose opening flaps together.	503 or 504	SSa-1	6-10	60	40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Make and attach air hose opening flaps. (cont'd)						
	c. Position the two horizontal and one vertical pieces of 1/2 inch loop fastener tape, around the sides of the air hose opening flap, as indicated on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
	d. Position flap on coat front, face to face, as indicated on pattern, with finished ends towards front of coat. Stitch 1/4 ± 1/16 inch from overedged edge. Turn flap towards side seam and raise stitch 1/4 ± 1/16 inch from turned edge.	301	LSbj-1	10-14	60	60	
*19.	Make and attach utility pocket and flap.						
	a. Turn outer edge of slide fastener cover under 1/2 ± 1/16 inch. Turn inner edge under 7/8 ± 1/16 inch enclosing other turned edge. Position slide fastener on underside of cover, with center chain (with slide fastener closed) even with the folded edge of the 7/8 inch fold (inner edge) and stitch tape to cover with two rows of stitching 1/4 to 5/16 inch gage with the back row 1/16 to 3/32 inch from the edge of fastener tape. Bridge of slide fastener shall finish toward top of sleeve.	301	LSbj-2	10-12	60	60	
*	b. Turn under top raw edge of upper pencil pocket 1/2 ± 1/16 inch and hem. Turn under top raw edge of lower pencil pocket 1/2 ± 1/16 inch and hem. Position the loop fastener tape on the lower pencil pocket as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301 301	EFb-1 LSbj-1	10-12 10-14	40 60	40 60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*19.	Make and attach utility pocket and flap. (cont'd)						
	c. Position top edge of lower pencil pocket to bottom of upper pencil pocket as indicated by marks on pattern. Turn under side and bottom edges of the combined pencil pocket and stitch to the utility pocket as indicated by marks on pattern.	301	LSd-1	10-12	60	60	
	d. Place a vertical row of stitching through the center (1/8 inch off center tolerance) of upper and lower pencil pockets. Stitching shall be through all plies, forming two compartments in each pencil pocket.	301	SSv-1	10-12	40	40	
	e. Place vertical bartacks on ends of pencil pocket openings, superimposed on rows of side stitching, and center stitching of upper and lower pencil pockets and at bottom of lower pencil pocket, at sides and center making a total of nine bartacks.	Bartack		28 per bartack	40	40	
	f. Close bottom corners of utility pocket and stitch, forming a bellows bottom. Turn and work out edges and points.	301	SSa-1	10-12	60	60	
	g. Turn back inner side edge of utility pocket 7/8 inch. Position free part of slide fastener tape on turned portion, with center of chain (with slide fastener closed) even with inner turned edge of pocket and stitch tape to pocket with two rows of stitching 1/4 to 5/16 inch gage with the back row 1/16 to 3/32 inch from edge of tape.	301		10-12	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Make and attach utility pocket and flap. (cont'd)						
*	h. Position pocket and flap on left top sleeve as indicated on pattern. The flap shall be positioned underneath the pocket and in line with the pencil pocket portion of the pocket. Turn under top, bottom and side raw edges and stitch pocket to sleeve.	301	LSd-1	10-12	60	60	
	i. Bartack each end of slide fastener opening with a horizontal bartack extending from slide fastener cover to pocket. Bartack shall be 1/4 ± 1/8 inch from top and bottom edges of pocket.	Bartack		28 per bartack	40	40	
20.	Make and attach chest pencil pocket.						
	a. Fold under top edge of chest pencil pocket, as indicated on pattern, and stitch 1/8 ± 1/16 inch from raw edge.	301	EFa-1	10-14	60	60	
	b. Raw edges of pencil pocket may be prehemmed prior to attachment to left coat front. The side and bottom edges may be turned under 3/8 ± 1/16 inch and stitched 1/16 to 1/8 inch from the edge. NOTE: The pencil pocket shall be placed beneath the left chest pocket.	301	EFa-1	8-10	60	60	
	c. With the side and bottom raw edges turned in 3/8 ± 1/16 inch, stitch pencil pocket to left chest 1/16 to 1/8 inch from turned in edges. Stitching shall superimpose prehemming stitching when this option is selected.	301	LSd-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach slide fastener.						
	a. Position the back edge of the slide fastener tape on the inside of the left front, 1-3/4 ± 1/8 inches from the finished front edge, as indicated on pattern. The top stop should be 3 ± 1/8 inches from the top.						
	b. Turn under top raw edge of tape 1/2 ± 1/8 inch and stitch tape to coat with two rows of stitching 3/16 to 1/4 inch apart with the back row of stitching 1/16 to 3/32 inch from back edge of tape.	301	LSbj-1	10-14	60	60	
	c. Place a horizontal bartack at the top and bottom of slide fastener tape, perpendicular to the slide fastener. Diagonal bartack may be used and shall catch both rows of stitching.	Bartack		28 per bartack	60	60	
	d. Position the back edge of the slide fastener tape (tape containing slider) on the outside of right front 1-3/4 ± 1/8 inches from the finished front edge, as indicated on pattern. The top stop should be 3 ± 1/8 inches from the top.						
	e. Turn under top raw edge of tape 1/2 ± 1/8 inch and stitch tape to coat with two rows of stitching 3/16 to 1/4 inch apart and the back row of stitching 1/16 to 3/32 inch from back edge of tape.	301	LSbj-1	10-14	60	60	
	f. Place a horizontal bartack at the top and bottom of slide fastener tape, perpendicular to the slide fastener. Diagonal bartack may be used and shall catch both rows of double stitching.	Bartack		28 per bartack	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach slide fastener (cont'd)						
	g. Position three 1/2 inch wide hook fastener tapes on the outside of right coat front, as indicated on pattern. Fastener tapes may be placed on top of slide fastener tape. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-12	60	60	
22.	Sew on chest and lower pockets.						
*	a. On the lower pockets only, fold up bottom of pocket as indicated by marks on pattern. Turn in raw edges of pocket 3/8 inch, if not prehemmed, and position on coat front as indicated by pattern. Stitch sides and bottom of pocket to the coat front 1/16 to 1/8 inch from the turned-in edges. Stitching shall superimpose prehemming stitching when this option is selected. The fold at the bottom of the lower pocket shall finish 1 ± 1/16 inch in depth.	301	LSd-1	10-14	60	60	
	b. Place a vertical bartack at top of each side of pocket opening. The bartack should be superimposed over the stitching line.	Bartack		28 per bartack	40	40	
23.	Attach chest and lower pocket flaps.						
	a. Turn in top edge of flap 1/4 ± 1/16 inch. Position folded edge above pocket on line indicated on pattern and stitch with two rows of stitching 3/16 to 1/4 inch apart, leaving the seam on the left chest pocket flap open 1-1/4 to 1-1/2 inches at center of flap (this opening is for the pencil pocket). Both rows of	301	LSd-2	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach chest and lower pocket flaps. (cont'd)						
	stitching on the left flap shall be an extension of the stitching in operation 10.d. Overedged edges shall be buried within the seam.						
	or						
	b. Position flaps (except left chest pocket flap) above pockets so that the line of stitching will be aligned with the lines indicated on pattern. Stitch to coat front 3/16 to 1/4 inch from overedged edge. Turn flaps down and raise stitch with two rows of stitching 1/4 ± 1/16 inch apart. Overedged edges shall be buried within the seam.	301 or 401 301	LSbk-3(a) LSbk-3(a) LSbk-3(b)	10-14 10-14 10-14	60 60 60	60 40 60	
	c. Place a vertical bartack at each end of pencil opening on left chest pocket flap.	Bartack		28 per bartack	40	40	
24.	Join shoulder seams.						
	Join fronts to back at shoulders, face to face with a double-lapped and double-stitched seam. The back shall overlap the fronts.	301 or 401	LSc-2	10-14	60 60	60 40	
25.	Make sleeves.						
	a. Join under sleeve to top sleeve with a double-lapped and double-stitched seam with the top sleeve overlapping the under sleeve.	301 or 401	LSd-2	10-14	60 60	60 40	
	b. Join the back arm seam of sleeves with a double-lapped and double-stitched seam with the top sleeve overlapping the under sleeve.	301 or 401	LSd-2	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
26.	Set sleeves.						
	Set the sleeves in the coat with a double-lapped and double-stitched seam. The coat shall overlap the sleeve.	301 or 401	LSc-2	10-14	60 60	60 40	
27.	Join sides and underarm sleeve seams.						
	a. Sleeves may be prehemmed according to operation 28.a prior to closing the side and underarm seams.						
	b. Join side seams and underarm seams in one continuous operation with a double-lapped and double-stitched seam. The coat front shall overlap the back. When sleeves are prehemmed, finished bottoms of under sleeve and top sleeve shall not be out of alignment by more than 1/8 inch.	301 or 401	LSc-2	10-14	60 60	60 40	
	c. Prehemmed sleeves shall be bartacked 1/8 inch from bottom of finished sleeve with a horizontal bartack positioned across sleeve joining seam.	Bartack		28 per bartack	40	40	
28.	Hem sleeves and attach wrist adjustment tabs.						
	a. Turn up bottom of sleeves, as indicated on pattern, with raw edges turned in and stitch 1/16 to 1/8 inch from the edge. The hem shall finish 1 ± 1/8 inch in width.	301	EFb-1	10-14	60	60	
	b. Position wrist adjustment tab on top sleeve, with bottom edges even, as indicated on pattern with the finished end towards the underarm seam. Stitch tab 1/4 ± 1/16 inch from overedged edge. Turn wrist ad-	301	LSb1-2	10-12	40	40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
28.	Hem sleeves and attach wrist adjustment tabs. (cont'd)						
	justment tab to finished position and raise stitch 1/4 ± 1/16 inch from turned edge. Overedged edges shall be buried within the seam.						
	or						
*	c. Position wrist adjustment tab on top sleeve with bottom edges even, as indicated on pattern, with the finished end towards the back of the coat. Stitch tab 1/4 ± 1/16 inch from overedged edge. Turn wrist adjustment tab to finished position and stitch the width of the tab with a rectangular box stitch or double row of stitching 3/16 to 1/4 inch wide.	301	SSc-2	10-14	60	60	
*	d. Attach 1 inch loop fastener tape to sleeve bottom, 1/8 ± 1/16 inch from edge, as indicated on pattern. Stitch loop fastener tape on all four sides 1/16 to 3/32 inch from the edge of tape.	301	LSbj-1	10-14	60	60	
29.	Set collar.						
	a. Seam undercollar to neck of coat with the seaming at ends of the collar not more than 1/8 inch below top edge of lapel. When size label is caught in seam, it shall be caught securely.	301	SSa-1	10-14	60	60	
	b. Turn in bottom edge of top collar 3/8 ± 1/16 inch and single stitch to neck of coat 1/16 to 1/8 inch from the edge, with the stitching not more than 1/8 inch from undercollar joining seam.	301	LSb-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Set collar. (cont'd)						
	c. Collar shall finish 3-1/2 ± 1/16 inches at center back.						
30.	Hem bottom.						
	a. Turn up bottom, as indicated on pattern, with raw edge turned in 3/8 ± 1/6 inch and single stitch 1/16 to 1/8 inch from folded edge with the stitching continued across the ends of the hem.	301	EFb-1	10-14	60	60	
	b. Hem shall finish 5/8 ± 1/8 inch wide and the ends shall not extend beyond the front edges of the coat.						
	c. In lieu of stitching across the ends of hem, vertical bartacks may be substituted in line with vertical stitching and shall cross the horizontal stitching.	Bartack		28 per bartack	40	40	
31.	Sew on button.						
	One button shall be sewn on the right coat front, 3/4 inch down from top of coat front and 1 to 1-1/4 inches from finished front edge, measurement shall be taken from center of button. The button shall correspond to the eyelet end of the buttonhole in left front of coat.	101 or 301		14-16 per button 14-16 per button	40 40	 40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
32.	Clean coat. a. Trim all ends of stitching to 1/4 inch maximum length throughout (inside and outside) and remove loose threads from the coat. b. Remove all spots, stains, and visible shade or size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.9 Finished measurements. The finished measurements shall be as shown in table II.

TABLE II. Finished measurements (inches)

Size	1/2 Chest 1/	Back Length 2/	Sleeve Length 3/
X-Small - Short	19-3/4	28-3/4	23-1/2
X-Small - Regular	19-3/4	30-1/4	24-1/2
X-Small - Long	19-3/4	31-1/2	25-1/2
Small - Short	21-3/4	29-1/4	24
Small - Regular	21-3/4	30-3/4	25
Small - Long	21-3/4	32-1/8	26
Medium - Short	23-3/4	29-3/4	24-1/2
Medium - Regular	23-3/4	31-1/4	25-1/2
Medium - Long	23-3/4	32-5/8	26-1/2
Large - Short	25-3/4	30-1/4	25-1/2
Large - Regular	25-3/4	31-3/4	26-1/2
Large - Long	25-3/4	33-1/8	27-1/2
X-Large - Short	27-3/4	30-3/4	26-1/2
X-Large - Regular	27-3/4	32-1/4	27-1/2
X-Large - Long	27-3/4	33-5/8	28-1/2
Tolerance	± 3/4	± 3/4	± 1/2

1/ With coat fully fastened, measure in line with base of armhole from folded edge to folded edge.

2/ Measure along center back from undercollar seam to bottom edge of coat.

3/ Fold sleeve along the underarm seam, measure along folded edge of the top sleeve from shoulder seam to the bottom of sleeve.

3.10 Workmanship. The end item shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2.1 and 4.4.2.2.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Point count inspection. (see 6.6)

4.4.2.1 End item visual examination. The end items shall be examined for the defects listed in table III and the assessment of penalty points shall be as indicated therein. Sampling and acceptance criteria shall be as specified in 4.4.2.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects

Examine	Defect	Point Value
Material defects and damages	a. Any hole, cut, tear, smash, burn, drill hole 1/, scorched area, mulitple float, or open place:	
	1. On outside 2/ (longest dimension in any direction):	
	(a) Up to 1/4 inch inclusive	2
	(b) More than 1/4 inch	3
	2. On inside 3/ (longest dimension in any direction):	
	(a) Up to 1/4 inch inclusive	1
	(b) More than 1/4 inch	2
	b. Misweave, dyestreak, broken or missing yarn, visible mend, thin place, or shade bar greater than 1/4 inch	1
	c. Loose yarn or coarse yarn on outside	1
	d. Needle chew on outside (largest dimension in any direction):	
	1. Up to 1/2 inch inclusive	2
	2. More than 1/2 inch	3
	e. No printed dye penetration:	
	1. Up to 1/4 inch inclusive	1
	2. More than 1/4 up to 1/2 inch inclusive	2
	3. More than 1/2 inch	3
	f. Poor printed dye penetration:	
	1. More than 1/4 up to 1/2 inch inclusive	1
	2. More than 1/2 inch	2
Shaded part	a. Variation in shade within an outside part	1
	NOTE: Parts suspected as being shaded shall be examined at a distance of 3 feet against the background of the other parts and colors of the garment. When the shade difference is readily discernible under these examined conditions, it shall be scored as a shaded part.	
	b. Any part required to be cut from one piece of material, shaded	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Cleanness	a. Spot or stain on outside 1/4 inch or more (largest dimension in any direction)	1
	b. Five or more thread ends of more than 1/2 inch on the outside, or nine or more thread ends of more than 1/2 inch on the inside	1
	c. Two or more shade or size tickets not removed	1
	d. Any size or shade marking on outside 1/4 inch or more	1
	e. More than 10 loose threads of 1 inch or more throughout (inside and outside)	1
Components and assembly	a. Any component part or required operation omitted (unless otherwise specified)	3
	b. Any component not as specified	3
	c. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise specified)	2
	d. Any operation not performed as specified (unless otherwise specified)	1
	e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise specified)	1
Cutting	Any component part not cut in accordance with directional lines indicated on patterns, or not in accordance with specified requirements	3
Seams and stitching	a. Accuracy of seaming: 1. Seam irregular, twisted, pleated or wavy	1
	NOTE: Pleats shall be scored when they exceed 1/4 inch in length and 1/16 inch in depth of fold.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Seams and stitching (cont'd)	2. Seam puckered (score only when on major portion of seam) 4/	1
	3. Any part of coat caught in an unrelated operation or stitching	2
	4. End of stitching when not caught in other seams or stitching backtacked less than 1/4 inch	1
	5. Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break	1
	6. Ends of a continuous line of stitching not overlapped or overlapped less than 1/2 inch (except label stitching)	1
	7. Ends of stitching on label overlapped with less than three stitches	1
	b. Gage of stitching and seam allowance:	
	1. Irregular, i.e. unevenly gaged, or corresponding stitchings not uniformly gaged (to be scored only when condition exists on more than 1/2 the length of the seam)	1
	2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified	1
	3. Edge or raised stitching sewn too close to edge resulting in damage to cloth	2
	4. Seam allowance not as specified or varies more than 1/8 inch (to be scored only when condition exists on more than 1/2 the length of the seam)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Seams and stitching (cont'd)	c. Open seam (all seams):	
	1. Up to 1/2 inch inclusive	1
	2. More than 1/2 up to 3/4 inch inclusive	2
	3. More than 3/4 inch	3
	NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches on joining seam constitute an open seam. On double-stitched seams, a seam is considered open when one or both sides of seam is open.	
	d. Raw edges:	
	1. On outside:	
	(a) Up to 1/2 inch inclusive	1
	(b) More than 1/2 up to 3/4 inch inclusive	2
	(c) More than 3/4 inch	3
	2. On inside (except overedged edge) more than 1 inch	1
	3. On overedged edge:	
	(a) 1 to 2 inches inclusive	1
	(b) More than 2 up to 3 inches inclusive	2
	(c) More than 3 inches	3
	4. Exposed under pocket flaps:	
	(a) 1/4 to 1 inch inclusive	1
	(b) More than 1 inch	2
	5. Raw edge on inside or outside of coat caused by excessive seam allowance protruding from a double-lapped, double-stitched seam	1
	e. Run-offs:	
	Edge or raised stitching:	
	(a) 1/4 to 1/2 inch inclusive	1
	(b) More than 1/2 inch	2
	f. Seam and stitch type:	
	1. Not specified seam or stitch type	2
	2. Looper thread on outside (when 401 stitch type is used)	3
	3. Any line of stitching omitted	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Seams and stitching (cont'd)	g. Stitch tension:	
	1. Loose tension, resulting in a loose seam:	
	(a) Up to 1/2 inch inclusive	1
	(b) More than 1/2 up to 3/4 inch inclusive	2
	(c) More than 3/4 inch	3
	2. Loose tension on raised or edge stitching resulting in exposed loose thread	1
	3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	3
	h. Stitches skipped or broken:	
	1. 1/4 to 1/2 inch inclusive	1
	2. More than 1/2 inch	2
	i. Stitches per inch (to be scored only when condition exists on major portion of seam):	
	1. All seams, except stitching of labels and overedge stitching:	
	(a) Less than the minimum	2
	(b) More than the maximum	1
	2. Stitching of label and over-edge stitching, two or more stitches less than specified	1
Hook and loop (general)	a. Hook and loop portions of fastener tape out of alignment when laying flat:	
	1. More than 1/4 inch horizontally	1
	2. More than 1/4 inch vertically	2
	b. Set on crookedly	1
	c. Hook and loop out of alignment or not able to be fastened properly	2
	d. Width of hook and loop not as specified	1
Buttonhole	a. Not in specified location	1
	b. Not specified type or not finished as specified	3
	c. Buttonhole omitted	3
	d. Gimp omitted, uncut buttonhole, or ends of gimp not pulled through to underside	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Buttonhole (cont'd)	e. Ragged edge, incomplete stitching or stitching not securely caught in fabric	2
	f. One or more broken stitches or two or more skipped stitches in buttonhole	1
	g. Buttonhole stitching extending beyond bartack	1
	h. Stitches per buttonhole less than minimum or more than maximum specified	1
	i. Finished cut length not as specified	1
	j. End of buttonhole tacked with less than four stitches per bar	1
	k. Buttonhole not vertically positioned on neck closure	3
Button	a. Missing, not attached as specified, or insecurely sewn	1
	b. Stitching not locked at end of cycle (tug at loose end of thread, when accessible, to determine if it will ravel)	1
	c. Not type, class or size specified	2
	d. Damaged or not functional	1
Bartacks	a. One or more omitted, misplaced or not serving intended purpose (unless otherwise classified herein)	2
	b. Not specified size	1
	c. Loose, incomplete or broken stitching	1
Slide fastener	a. Any part of slide fastener assembly omitted, bent, broken, cracked or otherwise defective, affecting function	3
	b. Top ends of tape not turned in and caught in the stitching joining slide fastener to coat	2
	c. Top stop less than 2-7/8 or more than 3-1/8 inches from neck edge	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Slide fastener (cont'd)	d. Back edge of slide fastener tape less than 2-1/4 or more than 2-1/2 inches from front edge	2
	e. Shade of tape not as specified	2
	f. Not functioning properly, failing to effect a secure closure or to open freely	3
	NOTE: The slide fastener shall be fully closed and opened to determine if fastener operates smoothly and provides a secure closure.	
	g. Not specified type or size	3
	h. Fastener tape cut or torn	3
Thongs	a. Thong missing	2
	b. Thong not specified size	1
	c. Ends of thong not dipped or seared	1
	d. Ends of thong fray when tugged at	1
Collar	a. Top collar tight, causing collar to curl	2
	b. Fullness or puckers on top collar	2
	c. Tight at joining to neck, causing puckers or pleats on front or back	2
	d. Corner of pointed end poorly shaped or not of uniform size or shape	2
	e. Edge uneven	1
	f. Twisted	2
	g. Points uneven in length:	
	1. 1/4 up to 1/2 inch inclusive	1
	2. More than 1/2 inch	2
	h. Ends of undercollar joining seam overlapping top of lapel more than 1/8 inch	1
	i. Hook fastener tape attached through both undercollar and top collar	1
	j. Stitching of top collar joining seam more than 1/8 inch above or below stitching of undercollar joining seam for a distance of more than 2 inches	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
*Collar tab	a. Width of collar tab less than 1-1/8 or more than 1-3/8 inches at point of attachment	1
	b. Not positioned as specified	1
	c. Collar tab set on crookedly	2
	d. Collar tab poorly shaped	2
	e. Collar tab and hook tape out of alignment or not able to be fastened properly	2
	f. Collar tab attached through both the undercollar and top collar	2
Front	a. Length of fronts:	
	1. Uneven by more than 1/4 inch at bottom when fastened	2
	2. Uneven by 1/4 inch or more at neck when fastened	2
	b. Cut length of loop for waist adjustment tab less than 4-7/8 or more than 5-1/8 inches	1
	c. Cut length of hook and loop for front closure less than 1-7/8 and more than 2-1/8 inches	1
	d. Buttonhole less than 5/8 inch or more than 3/4 inch from edge	2
	e. Lapel buttonhole not parallel with top edge of lapel	1
	f. Lapel buttonhole constructed with the purling on inside of facing	1
	g. Button 1/4 inch or more out of vertical alignment	2
	h. Lapel steps uneven by more than 1/4 inch	2
Chest openings	a. Width of chest openings less than 2-1/8 or more than 2-3/8 inch	2
	b. Height of chest openings less than 2-1/8 or more than 2-3/8 inch	2
	c. Facing not attached as specified	2
	d. Cut length of vertical hook less than 2-3/8 or more than 2-5/8 inches	1
	e. Cut length of horizontal hook less than 1-1/8 or more than 1-3/8 inches	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Chest opening flaps	a. Not positioned as specified	2
	b. Width of chest opening flaps less than 2-3/8 or more than 2-5/8 inches	2
	c. Length of chest opening flaps less than 2-3/4 or more than 3 inches	2
	d. Set on crookedly	2
	e. Cut length of vertical loop less than 3-1/8 or more than 3-3/8 inches	1
	f. Cut length of horizontal loop less than 2-1/8 or more than 2-3/8 inches	1
	g. Chest opening flaps loop tape out of alignment with hook on chest openings or not able to be fastened properly	2
Pockets and flaps	a. Edges of pockets pleated or twisted in stitching	1
	b. Pencil opening omitted in left chest pocket flap	2
	c. Raw edge of pocket hems not turned in	2
	d. Pocket flap tight, causing fullness, twisting, or curling of pocket flap	2
	e. Flap attached crookedly, i.e., distance between sides of pocket and underside of opened flap vary by more than 1/4 inch	2
	f. Pocket or flap poorly shaped	2
	g. Pocket or flap out of alignment between corresponding points from pocket to pocket or flap to flap by more than 3/8 inch (measure vertically from bottom of coat)	2
	h. Hook and loop not specified width	2
	i. Hook and loop not positioned as specified	2
	j. Cut lengths of hook and loop for pockets less than specified	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine		Defect	Point Value
Pocket and flaps (cont'd)		k. Chest pockets out of parallel with respect to finished center front edge more than 3/8 inch	2
		l. Chest pockets or lower pockets unequal in width or height by more than 3/8 inch	2
		m. Flap not covering front or back edge of pocket by 3/16 inch or more	2
		n. Pocket flaps not uniform in width and length from pocket to pocket by more than 1/8 inch	1
		o. Pocket and flap hook and loop tape out of alignment or not able to be fastened properly	2
Chest pencil pocket		a. Hem less than 1/4 or more than 3/8 inch wide	1
		b. Edge exposed beyond side or bottom edge of pocket	3
		c. Opening less than 1-1/4 or more than 1-1/2 inches	1
		d. Not located as specified	2
		e. Double row of stitching omitted at pencil opening of left chest pocket flap	1
Sleeve utility pocket		a. Pocket set on crookedly	2
		b. Fastener bridge not at top	3
		c. Edge of pocket pleated or twisted in stitching	2
		d. Edge of slide fastener tape extending beyond edge of pocket by 1/8 inch or more	3
		e. Pencil pocket compartments uneven in width by more than 1/4 inch	2
		f. Slide fastener (when in closed position) exposed more than 1 inch	2
	*	g. Pocket flap missing	3
Sleeves		a. Sleeves reversed, i.e., right sleeve in left armhole, left sleeve in right armhole	3
		b. Sleeve puckered or pleated at joining to armhole	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Sleeves (cont'd)	c. Sleeve tight at armhole, causing puckers, or pleats on fronts or back at armhole seam	2
	d. Sleeve backarm seams unequal distance from shoulder seams by more than 3/4 inch	1
	e. Edge of loop tape less than 1/8 inch from bottom edge	1
	f. Edge of loop tape more than 1/4 inch from bottom edge	1
	g. Loop tape less than 6-7/8 or more than 7-1/8 inches in length	1
	h. Sleeve hem less than 1-1/8 or more than 1-3/8 inches wide	1
	i. Sleeve hem irregular by more than 1/8 inch	1
	j. Bottom edges of top and undersleeve not aligned at bottom by more than 1/8 inch if alternate hemming is used	2
Wrist adjustment tab	a. Not positioned as specified	1
	b. Wrist adjustment tab set on crookedly	2
	c. Wrist adjustment tab poorly shaped	2
	d. Cut length of hook less than 2-3/8 or more than 2-5/8 inches long	1
	e. Bottom edge of wrist adjustment tab extending below sleeve or extending above bottom edge of sleeve by more than 1/8 inch	1
	f. Width of sleeve adjustment tab less than 1-1/2 or more than 1-3/4 inches	1
	g. Wrist adjustment tab hook and loop tape out of alignment or not able to be fastened properly	2
Waist adjustment tab	a. Not positioned as specified	1
	b. Waist adjustment tab poorly shaped	1
	c. Cut length of hook less than 2-3/8 or more than 2-5/8 inches	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Wrist adjustment tab (cont'd)	d. Waist adjustment tab and loop tape out of alignment or not able to be fastened properly	2
	e. Width of waist adjustment tab less than 1-5/8 or more than 1-7/8 inches	1
Waist tunnel	a. Waist tunnel not positioned as specified	1
	b. Waist tunnel set on crookedly	1
	c. Waist tunnel poorly shaped	1
	d. Width of waist tunnel less than 2-5/8 or more than 2-7/8 inches	1
	e. Length of waist tunnel less than 20-5/8 or more than 20-7/8 inches	1
Webbing	a. Length of webbing less than 5-5/8 or more than 5-7/8 inches	1
	b. Not specified width	1
	c. Not attached to waist adjustment tabs as specified	1
Shoulder, armhole, underarm, side seams, and back and front arm sleeve seams	a. Front lapped on back at shoulder seams	1
	b. Back lapped on front at side seams	1
	c. Undersleeve lapped on top sleeve at back arm or front arm seams	1
	d. Sleeve lapped on front or back at armhole seam	2
Labels	a. Missing, incorrect or illegible	2
	b. Not positioned as specified	1
	c. Not stitched on all four sides	1
	d. More than 1 inch off center	2
	e. Label stitching through the printing	2
	f. Label stitching not covered by lower right pocket	2
Bottom hem	a. Stitching across ends of hem omitted or insecure	1
	b. Twisted	2
	c. Width less than 1/2 or more than 3/4 inch	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Point Value
Bottom hem (cont'd)	d. Irregular in width by 1/4 inch or more	1
	e. Bottom of coat pleated or puckered at stitching, forming hem	3
	f. One or both hem ends extending more than 1/8 inch beyond front edge of coat	2

1/ Drill hole - This defect should not be scored when visible on the inside of the coat, provided that the component, as attached to outside of coat, fully covers the drill hole.

2/ The "outside" is any part of the coat that is visible when the completely fastened and closed coat is examined.

3/ The "inside" is any part of the coat that is not visible when the completely fastened and closed coat is examined.

4/ Seams suspected of being puckered shall be examined at a distance of 3 feet in comparison with the AATCC photographic comparative rating (see 2.2) for seams. Puckering on a major portion of the suspected seam that equals or is worse than rating 3 for single needle seams or double needle seams shall be scored as a puckered seam.

4.4.2.1.1 Sampling and acceptance for visual examination. The sampling and acceptance criteria shall be as specified in table IV and 4.4.2.1.2 through 4.4.2.1.4.4. The lot size shall be expressed in units of coats. The sample unit shall be one coat. The sample size shall be based on lot size as indicated in table IV. The lot shall be unacceptable if:

a. The point value for 3 and 2 point defects exceeds the applicable maximum acceptance point value.

or

b. The point value for total (3, 2, and 1 point) defects exceeds the applicable maximum acceptable point value.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Sampling and acceptance criteria for visual examination

	Lot size	Sample size	Maximum acceptable point values: 3 & 2 point defects	Maximum acceptable point values: 3, 2, & 1 point defects
Normal inspection	Up thru 500	50	13 points	25 points
	501 thru 1,200	80	19 points	31 points
	1,201 thru 3,200	125	27 points	43 points
	3,201 thru 10,000	200	38 points	63 points
	10,001 and over	315	58 points	93 points

	Lot size	Sample size	Maximum acceptable point values: 3 & 2 point defects	Maximum acceptable point values: 3, 2, & 1 point defects
Tightened inspection	Up thru 500	50	7 points	16 points
	501 thru 1,200	80	12 points	25 points
	1,201 thru 3,200	125	18 points	37 points
	3,201 thru 10,000	200	28 points	57 points
	10,001 and over	315	41 points	85 points

	Lot size	Sample size	Maximum acceptable point values: 3 & 2 point 1/ defects	Maximum acceptable point values: 3, 2, & 1 point defects
Reduced inspection	Up thru 1,200	32	7-14 points	24 points
	1,201 thru 3,200	50	12-18 points	30 points
	3,201 thru 10,000	80	16-21 points	38 points
	10,001 and over	125	23-28 points	43 points

1/ If the first value is exceeded, but the second value has not been exceeded, accept the lot but reinstate normal inspection (see 4.4.2.1.4.4.b). The second value is the maximum acceptable point value.

4.4.2.1.2 Initiation of inspection. Normal inspection shall be used at the start of inspection unless otherwise directed by the responsible procurement quality assurance element administering the contract.

4.4.2.1.3 Continuation of inspection. Normal, tightened, or reduced inspection shall continue unchanged on successive lots except where switching procedures in 4.4.2.1.4 require a change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.4.2.1.4 Switching procedures.

4.4.2.1.4.1 Normal to tightened. When normal inspection is in effect, tightened inspection shall be instituted when two out of five consecutive lots have been rejected on original inspection (i.e., ignoring resubmitted lots for this procedure).

4.4.2.1.4.2 Tightened to normal. When tightened inspection is in effect, normal inspection shall be instituted when five consecutive lots have been considered acceptable on original inspection.

4.4.2.1.4.3 Normal to reduced. When normal inspection is in effect, reduced inspection shall be instituted provided that all of the following conditions are satisfied:

a. The preceding ten lots have been on normal inspection and none have been rejected on original inspection; and

b. The total number of points for 3 and 2 point defects in the samples from the preceding ten lots is equal to or less than 60 percent of the total maximum acceptable point values for 3 and 2 point defects from the preceding ten lots; and

c. The total number of points for 3, 2, and 1 point defects in the sample from the preceding ten lots is equal to or less than 75 percent of the total maximum acceptable point values for 3, 2, and 1 point defects from the preceding ten lots; and

d. Production is at a steady rate; and

e. Reduced inspection is considered desirable by the procurement quality assurance element administering the contract.

4.4.2.1.4.4 Reduced to normal. When reduced inspection is in effect, normal inspection shall be instituted if any of the following occur on original inspection:

a. A lot is rejected; or

b. A lot is considered acceptable but exceeds the applicable first value (see 1/ to table IV); or

c. Production becomes irregular or delayed; or

d. Other conditions warrant that normal inspection be instituted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.4.2.2 End item dimensional examination. The appropriate number of coats, as specified below, shall be examined for conformance to the finished measurement requirements specified in 3.9. The lot size shall be expressed in units of coats. The sample unit shall be one coat. When a measurement deviates from the dimension and tolerance specified, the coat shall be penalized one point. Each coat shall also be penalized one point when the sleeves are uneven in length by 1/2 inch or more. The lot shall be unacceptable if the total point values resulting from this examination exceeds the maximum acceptable point values specified below. Each size of coat present in the lot shall be represented in the sample selected for this examination.

Lot size	Sample size	Maximum acceptable point values
Up thru 500	8	0
501 thru 3,200	13	1
3,201 thru 35,000	20	2
35,001 and over	32	3

4.4.3 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing, damaged or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of coats per container is more or less than specified Number of coats per bundle is more or less than specified 1/

1/ For this defect, one bundle from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each coat shall be laid flat with the front up. The sleeves shall be folded at right angles across the chest one on top of the other. For the larger sizes, it may be necessary to adjust the sides in order to attain the desired width of approximately 23 inches. The bottom edge of the coat shall first be folded over a few inches and the coat then folded in half so the length measures approximately 14-1/2 inches. Five folded coats of one size only shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial. Coats shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Thirty coats of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping for type II, class F loads.

* 5.2.2 Level B packing. Thirty coats of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. Coats, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coats, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coat is for wear by aviator crewmen of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
* b. Class and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article sample is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 International standardization agreement. Certain provisions of this document are the subject of international standardization agreement as cited in NATO, STANAG 2333. When amendment, revision, or cancellation of this document is proposed, which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

6.5 Suggested resin. A suggested resin (see 3.3.5.3) for dipping ends of slide fastener thongs is "No Fray No. 64", Champion Packaged Products, Inc., 4939 South Austin Avenue, Chicago, IL 60638.

6.6 Point count system. This specification contains the requirements for a point count system for sampling and inspection of the end item. For the visual examination, point values of 1, 2, or 3 are assigned to the listed defects depending on severity. The higher point values are assigned to those defects having a more detrimental effect on the appearance or serviceablity of the items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Aviator
Crewchief
Flight clothing

6.8 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8415-0797)


Review activities:

Army - MD
Air Force - 82
DLA - CT


User activities:

Air Force - 45
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

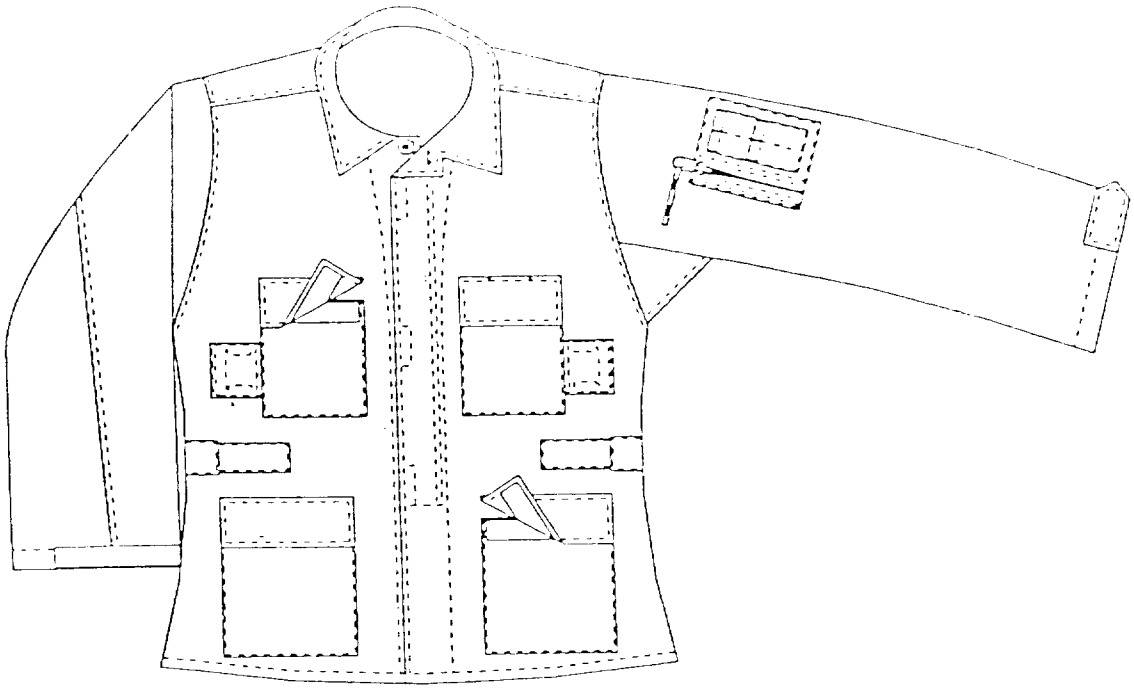

FRONT

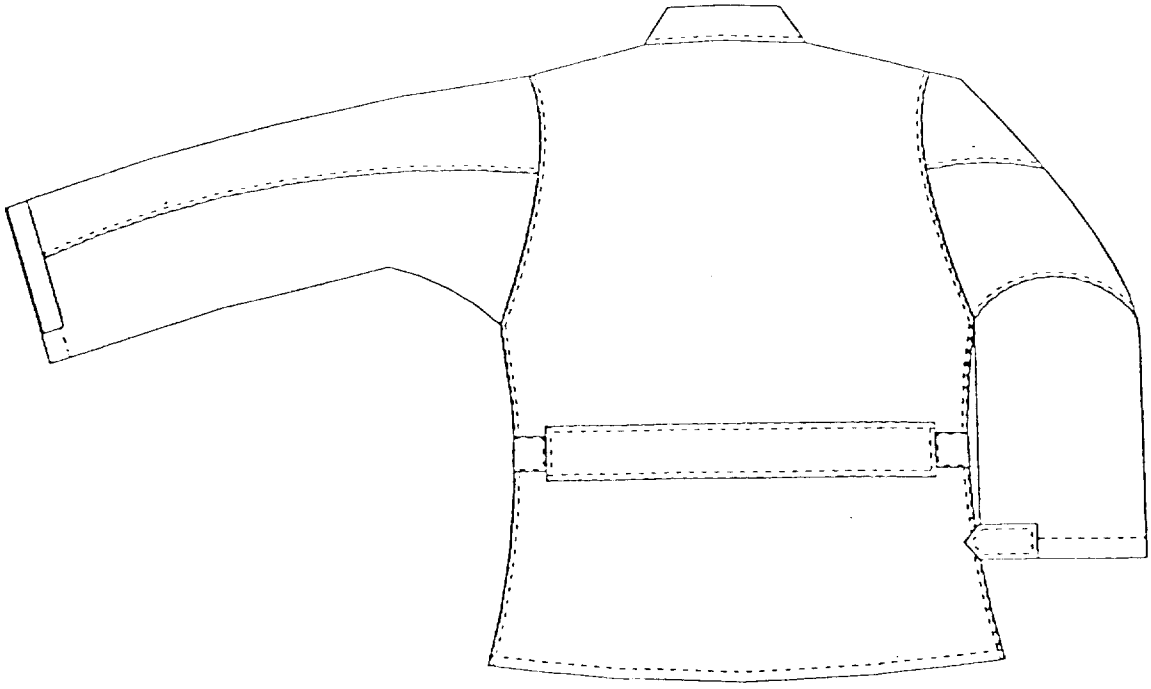

BACK

FIGURE 1. COAT, AIRCREW, COMBAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-44371A	1991 September 30

3. DOCUMENT TITLE

COAT, AIRCREW, COMBAT

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON/DSN
U.S. Army Natick RD&E Center	508-651-4532	256-4532
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-IRT Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.