INCH-POUND

MIL-O-44368
29 June 1989

MILITARY SPECIFICATION

OPENER, CAN, HAND, FOR TRAY PACKS AND ROUND CANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size of hand held can opener for severing the tops of rimmed rectangular metal (tray pack) and round cans (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-378	-	Plastic Sheet and Strip, Thin Gauge, Polyolefin
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-C-795	-	Cushioning Material, Packaging (Flexible, Cellular, Plastic Film) For Packaging Applications
PPP-T-60	-	Tape, Packaging, Waterproof

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods Of

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

5-13-3970 - Can Opener, Hand Held, Commercial
5-13-3971 - Can Opener, Hand, Tray Pack and Round Cans
5-13-3972 - Can Opener Modification
5-13-3973 - Stud
5-13-3974 - Guide Plate

(Copies are available from the U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

al load, subsequent pizzas shall be loaded in not practice. After the init

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification. The materials and components used shall conform to the applicable referenced specifications, standards and requirements specified herein and on Drawings 5-13-3970, 5-13-3971, 5-13-3972, 5-13-3973, and 5-13-3974. Where materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice provided the completed can openers comply with all provisions of this specification.

3.3 Design and construction. The hand can opener shall be of commercial design and construction as shown on Drawing 5-13-3970 with modifications as specified herein and on Drawings 5-13-3971, 5-13-3972, 5-13-3973, and 5-13-3974.

3.4 Instruction sheet. Each can opener shall be furnished with an instruction sheet conforming to figure 1 of this document. The instruction sheet shall be clearly and legibly printed on plain white paper measuring approximately 4 by 4 inches.

3.5 Workmanship. The finished hand can opener shall be clean and free of rust, slivers, die marks, deformities, and fractures. All sharp edges and corners shall be removed. Workmanship shall be as specified herein on Drawings 5-13-3970, 5-13-3971, 5-13-3972, 5-13-3973, and 5-13-3974. The occurrence of defects shall not exceed the applicable acceptable quality levels stated herein (see 4.4 through 4.4.5).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component testing. Components shall be examined for conformance to the dimensions specified on Drawings 5-13-3970, 5-13-3971, 5-13-3972, 5-13-3973, and 5-13-3974. Any dimension not within the specified tolerance shall be cause for rejection of that component, correction of the manufacturing process as required, and examination of the next produced component until all specified dimensions are met.

4.4.2 In-process inspection. Inspection of subassemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table I. The lot size shall be expressed in units of can openers. The sample unit shall be one can opener. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Minor
Can opener (general)	Design not as shown on applicable drawing	101	
	Opener not assembled as specified	102	
	Any component missing, broken, cracked, malformed, or bent out of shape	103	
Construction and workmanship	Welds not continuous	104	
	Welds rusted, cracked, burned, overlapped, piled or not smooth	105	
	Dents, bends or rough tool marks		201
	Sharp edges or corners (except cutting edge)	106	
	Burrs or slivers	107	

4.4.4 End item drag plate examination. The openers shall be examined for conformance to the drag requirement specified in Drawing 5-13-3971. Any guide plate that moves freely, with no resistance to movement; or one that cannot be moved at all shall be classified as a defect. The lot size shall be expressed in units of can openers. The sample unit shall be one can opener. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 1.0. See figure 1 for positions of guide plate for opening round cans and tray packs.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete wrapping and securing of cushioning material and tape to non-handle end of opener.
Content	Number of openers is more or less than specified. Any instruction sheet missing, damaged, or not as specified.
Shipping container	Not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Packaging shall be level A.

5.1.1 Level A.

5.1.1.1 Preservation application. Each can opener shall be cleaned by process C-1 and dried in accordance with MIL-P-116. The feed and cutting wheel shall be coated with a preservative conforming to type P-14 of MIL-P-116.

5.1.1.2 Lubrication. All points of the can opener requiring lubrication shall be lubricated to capacity with the manufacturer's recommended food service equipment grade lubricant. The lubricant shall not cause food contamination.

5.1.1.3 Unit packing. Each can opener, closed, and preserved as specified in 5.1.1.1, shall be placed in a snug-fitting 0.004 inch thick polyethylene bag conforming to L-P-378. The dimensions of the bag shall be approximately 4 by 10 inches, and shall contain an instruction sheet as specified in 3.4 (see figure 1). The bag shall be closed by heat sealing. Prior to placement in the bag and sealing, the non-handle end of the can opener shall be entirely wrapped in cushioning material conforming to class 1 of PPP-C-795. The cushioning material shall be secured by means of tape conforming to PPP-T-60.

5.2 Packing. Packing shall be level A or B as specified (see 6.2).

5.2.1 Level A packing. Fifty can openers, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method III, and reinforced as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Fifty can openers, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with method III as specified in the appendix of PPP-B-636.

5.3 Palletization. When specified (see 6.2), can openers, packed as specified in 5.2.1 and 5.2.2 shall be palletized on a 4-way entry pallet in accordance with load type I or Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The can opener is primarily intended for use in opening rectangular (1001 by 1206 by 200 size) metal tray pack cans and round cans transported in insulated carriers to small combat groups under constraints that preclude access to field kitchens.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. When a first article is required (see 3.1, 4.3, and 6.3).
d. Levels of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Subject term (key word) listing.

Can
Can opener
Opener
Tray pack

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:


Army - MD, TS
Navy - MC
Air Force - 84
DLA - GS

Preparing activity:


Army - GL

(Project 7330-0571)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

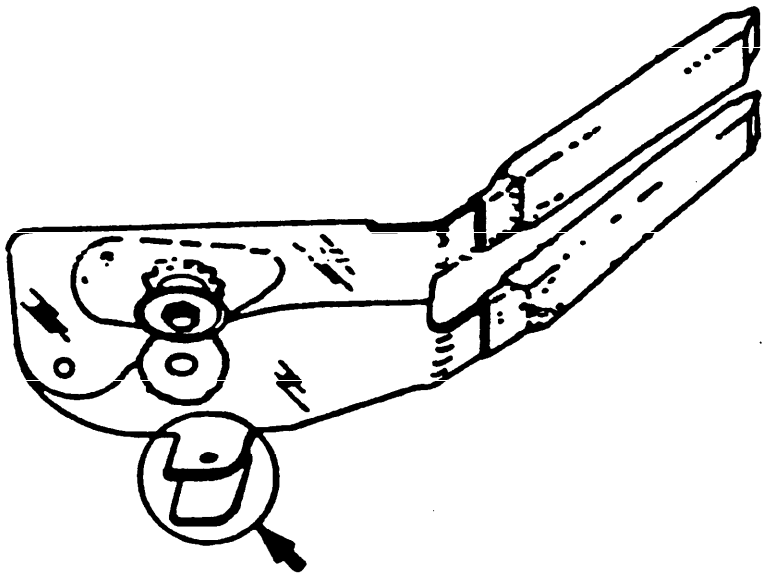

POSITION OF GUIDE PLATE FOR OPENING TRAY PACKS

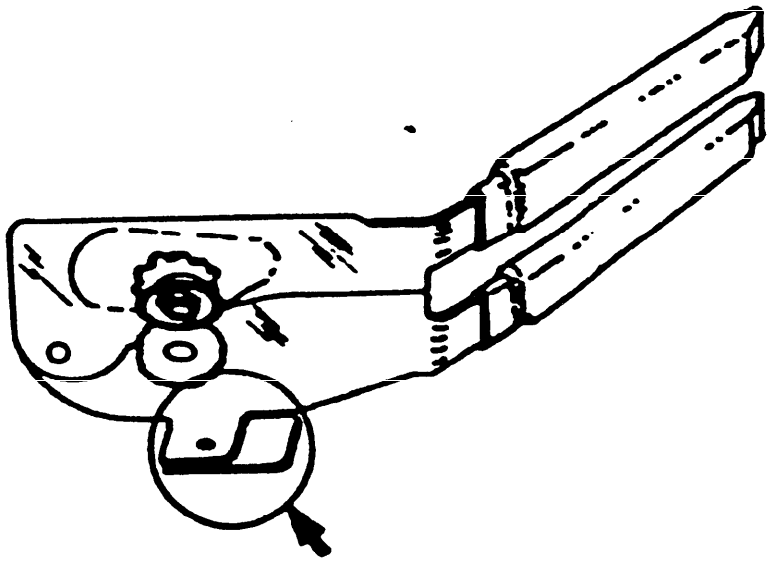

POSITION OF GUIDE PLATE FOR OPENING ROUND CANS

INSTRUCTION SHEET
FOR
HAND CAN OPENER

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2022-10-22T01:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-O-44368	Opener, Can, Hand, For Tray Packs and Round Cans

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026/10 22T01:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:49Z
Check the source to verify that this is the current version before use.