INCH-POUND
MIL-T-44372
5 June 1989

MILITARY SPECIFICATION

TROUSERS, AIRCREW, CAMOUFLAGE PATTERN: COMBAT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers camouflage pattern aircrew combat trousers.

1.2 Classification. The trousers shall be in the following sizes (see 6.2).

Schedule of sizes

X-Small	Small	Medium	Large	X-Large
Short	Short	Short	Short	Short
Regular	Regular	Regular	Regular	Regular
Long	Long	Long	Long	Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	- Fastener, Slide, Interlocking
V-T-280	- Thread, Gimp, Cotton, Buttonhole
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-B-543	- Buckles, Tongueless and Web Strap
MIL-F-21840	- Fastener Tapes, Hook and Loop, Synthetic
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43636	- Thread, Aramid
MIL-W-43685	- Webbing, Tape, Textile, Aramid Fiber
MIL-T-43709	- Tape, Textile, Aramid
MIL-T-44100	- Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-C-83429	- Cloth, Plain and Basket Weave, Aramid

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets
MIL-STD-1488	- Provisions for Evaluating Quality of Trousers

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Applications for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variations from this document may appear in the sample, in which case this document shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be plain weave aramid printed with a Woodland Camouflage Pattern conforming to type II, class 5 of MIL-C-83429.

3.3.2 Material for side hanging pockets, waistband lining, right fly facing, left fly, and thigh pocket facing. The cloth for the side hanging pockets, waistband lining, right fly facing, left fly, and thigh pocket facing shall be camouflage pattern basic material, ground shade cloth, or printed seconds cloth. Ground shade cloth shall be dyed in conformance with MIL-C-83429 prior to overprinting of the respective camouflage patterns. Ground shade cloth shall meet the physical, mechanical and dimensional requirements of the respective finished fabric. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage print patterns, cited in MIL-C-83429. If printed seconds are used, they must be marked on the face side with stripes, 3 inches apart across the full width running in a warpwise direction for the length of the entire roll. The stripes shall be 1/8 to 1/2 inch wide and shall be applied by the cloth finisher or at the end item contractor's plant. The color of the stripes shall approximate any one of the camouflage print colors, and colorfastness to crocking shall be no lower than 6.5 (Munsell Scale). When applied at the end item contractor's plant, the color of the stripes shall approximate any one of the camouflage print colors and may be applied with a "magic marker", quality marking medium.

3.3.3 Webbing. The webbing for the waist adjustment straps shall conform to type I of MIL-W-43685. The color shall be Olive Drab 106. The width of the webbing shall be 5/8 inch.

3.3.4 Buckles. The buckles for the waist adjustment straps shall be tongueless, 2-bar conforming to type II, style 3, class 3, 5/8 inch of MIL-B-543.

3.3.5 Hook and loop fastener tape. The hook and loop fastener tape shall be 1 inch in width and shall conform to type I, class 1, Green 3421 of MIL-F-21840. The colorfastness requirements shall not apply.

3.3.6 Slide fastener. The slide fasteners listed below shall be brass with a black chemical finish and conform to type I, style 15, size MS of V-F-106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

Slide fastener lengths (inches)

Size	Length
X-Small - Short	7
X-Small - Regular	7-1/2
X-Small - Long	8
Small - Short	7-1/2
Small - Regular	8
Small - Long	8-1/2
Medium - Short	8
Medium - Regular	8-1/2
Medium - Long	9
Large - Short	8-1/2
Large - Regular	9
Large - Long	9-1/2
X-Large - Short	9
X-Large - Regular	9-1/2
X-Large - Long	10

3.3.6.1 Slide fastener tape. The slide fastener tape shall be aramid, 3/4 inch wide, Olive Green 106 in color and the tape shall be of sufficient length to comply with the slide fastener attachment operation. The finished tape shall show colorfastness to light and laundering equal to or better than the standard sample. When no standard sample is available, the tape shall show "fair" fastness to light after 20 standard fading hours, and "good" fastness to laundering.

3.3.6.2 Slide fastener thong. Each slide fastener shall be furnished with a thong of sufficient length to measure 2-1/2 to 3 inches (folded) when attached to slider pull tab. The thong shall be 1/4 inch wide, color Olive Green 106 conforming to MIL-T-43709. Ends of the thong shall be seared or dipped in a colorless, non-combustible resin (see 6.6). The thong shall be attached to slider pull tab as specified in table I, operation 5.

3.3.7 Button. The button for the wasit closure shall conform to type II, class D, style 26, 30-line of V-B-871. The button shall have a dull finish and the color shall be Olive Green BP, Cable No. 62016.

3.3.8 Gimp. The cotton gimp for reinforcing the waist closure buttonhole shall conform to type I or II, size No. 8 of V-T-280. The color shall meet Olive Drab S-1, C.A. 66022.

3.3.9 Thread.

3.3.9.1 Aramid and para-aramid. The thread shall be aramid, sizes B and E conforming to MIL-T-43636. Para-aramid spun staple thread, size T-35, conforming to MIL-T-44100 may be used as an alternate to aramid sizes B and E. The color of the aramid and para-aramid threads shall be Olive Drab S-1,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

C.A. 66022, and shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering.

3.3.9.2 Cotton-covered polyester core. Cotton-covered polyester core thread conforming to ticket No. 50, 2 ply of MIL-T-43548 may be used as an alternate thread for bartacking. The color of the thread shall be Olive Drab S-1, C.A. 66022 and shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering.

3.3.10 Labels. Each pair of trousers shall have an identification label, an instruction label and a size label or a combination identification and instruction label. The labels shall conform to the requirements listed below.

3.3.10.1 Identification label. The identification label shall conform to type VI, class 1 of DDD-L-20. The color of the label shall be Medium Green, Cable No. 70034, 70130 or 70131. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.10.2 Instruction label. The instruction label shall conform to type VI, class 3 of DDD-L-20. The color of the label shall be Medium Green, Cable No. 70034, 70130 or 70131. The fastness to laundering requirements of DDD-L-20 shall apply. The label shall contain the following information:

TROUSERS, AIR CREW, CAMOUFLAGE PATTERN: COMBAT

1. Adjust waist size by straps on waistband.

2. Blouse trousers outside of boots.

3. These trousers are of low flammability. No other special flame resistant treatment is required.

4. Hand/Machine Washing: Permanent press cycle in warm water with a mild laundry detergent.

5. DO NOT STARCH OR CHLORINE BLEACH.

6. Rinsing: Rinse thoroughly in clear warm water after laundering. Detergent must be removed or fabric flame resistance will be reduced.

7. Drying: Tumble dry at low heat (130°F). Remove immediately from dryer. To drip dry, remove from water and place on a rustproof hanger.

WARNING Launder with slide fastener and hook and loop fasteners engaged. Do not press hook and loop fasteners.

DO NOT REMOVE THIS LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.3.10.3 Combination label. A combination identification and instruction label may be used. It shall conform to type VI, class 15 of DDD-L-20. The color of the label shall be Medium Green, Cable No. 70034, 70130 or 70131. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.10.4 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The color shall be Medium Green, Cable No. 70034, 70130 or 70131. The fastness to laundering requirements of DDD-L-20 shall apply. The size information shall be printed with not less than 10 point characters and shall contain the following information, as applicable:

X-Small - Short	X-Small - Regular	X-Small - Long
Inseam: 26-1/2 to 29-1/2 inches Waist: Up to 27 inches Stock No. NATO Size: 6775/5869	Inseam: 29-1/2 to 32-1/2 inches Waist: Up to 27 inches Stock No. NATO Size: 7583/5869	Inseam: 32-1/2 to 35-1/2 inches Waist: Up to 27 inches Stock No. NATO Size: 8390/5869
Small - Short	Small - Regular	Small - Long
Inseam: 26-1/2 to 29-1/2 inches Waist: From 27 to 31 inches Stock No. NATO Size: 6775/6979	Inseam: 29-1/2 to 32-1/2 inches Chest: From 27 to 31 inches Stock No. NATO Size: 7583/6979	Inseam: 32-1/2 to 35-1/2 inches Chest: From 27 to 31 inches Stock No. NATO Size: 8390/6979
Medium - Short	Medium - Regular	Medium - Long
Inseam: 26-1/2 to 29-1/2 inches Waist: From 31 to 35 inches Stock No. NATO Size: 6775/7989	Inseam: 29-1/2 to 32-1/2 inches Waist: From 31 to 35 inches Stock No. NATO Size: 7583/7989	Inseam: 32-1/2 to 35-1/2 inches Wasit: From 31 to 35 inches Stock No. NATO Size: 8390/7989
Large - Short	Large - Regular	Large - Long
Inseam: 26-1/2 to 29-1/2 inches Waist: From 35 to 39 inches Stock No. NATO Size: 6775/8999	Inseam: 29-1/2 to 32-1/2 inches Waist: From 35 to 39 inches Stock No. NATO Size: 7583/8999	Inseam: 32-1/2 to 35-1/2 inches Waist: From 35 to 39 inches Stock No. NATO Size: 8390/8999

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

X-Large - Short	X-Large - Regular	X-Large - Long
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: Above 39 inches	Waist: Above 39 inches	Waist: Above 39 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/9909	NATO Size: 7583/9909	NATO Size: 8390/9909

3.4 Design. The trousers shall have a slide fastener fly closure. The trousers contain two thigh patch pockets, two calf patch pockets, two side hanging pockets and two hip pockets. All pockets except side hanging pockets contain flaps. Hook and loop fastener tape is used for all pocket closures.

3.5 Figure. Figure 1 is furnished for information only. To the extent of any inconsistencies between the figure and the specification, the specification shall control.

3.6 Patterns. Standard patterns, which provide a 1/2 + 1/8, -0 inch seam allowance for double-lapped and double-stitched seams and 3/8 + 1/8, -0 inch seam allowance for single needle seams, except where otherwise specified, will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.6.1 List of pattern parts. The components of the trousers shall be cut from material as specified in accordance with the pattern parts indicated below.

List of pattern parts

Material	Nomenclature	Cut parts
Aramid, plain weave	Thigh pocket	2
	Thigh pocket facing 1/	2
	Thigh pocket flap	2
	Front 2/	2
	Back 2/	2
	Side hanging pocket 2/	2
	Side hanging pocket bearer 2/	2
	Side hanging pocket facing 2/	2
	Left fly	2
	Right fly lining 2/	1
	Hip pocket	2
	Hip pocket facing	2
	Hip pocket bearer	2
	Hip pocket flap	2
	Calf pocket	2
	Calf pocket flap	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

List of pattern parts (cont'd)

Material	Nomenclature	Cut parts
Alternate sewn-on waistband construction	Front	2
	Back	2
	Side hanging pocket bearer	2
	Side hanging pocket facing	2
	Left fly lining	1
	Left fly	1
	Waistband 3/	1
	Right fly lining	2
	Side hanging pocket	2
	Hip pocket	2
	Waistband lining 3/	1

1/ When the thigh pocket facing is strip cut and put on rolls, disregard the pattern piece.

2/ When alternate sewn-on waistband and fly patterns are used, disregard these patterns pieces.

3/ Waistband and waistband lining are cut from same pattern part.

3.7 Construction.

3.7.1 Stitches, seams and stitching. All stitches, seams and stitching types specified in table I shall conform to FED-STD-751. When two or more methods of seams or stitch types are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the coat. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. The guides and knives on the overedge machines shall be set to trim only the ravelled ends of the fabric. Seams required to be worked out having a depth between the fold of 1/8 inch or more shall be considered a defect.

3.7.2 Type 301 stitching. Ends of stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continous line of stitching shall be overlapped not less than 1/2 inch except on labels where a minimum of a three stitch overlap is required. Thread tension shall be maintained so that there

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or runoff stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. When damaged thread has been removed, needle holes do not constitute damage to the material. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.2.2 Repairs of types 401, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.2.1.a and 3.7.2.1.b. Repairs to stitch type 401 may be accomplished by using stitch type 301, except when used for eyelets.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.7.4 Buttonholes. The buttonhole on the trouser waistband shall be eyelet end tapered bar type worked over gimp as specified in 3.3.8. The purling shall be on the outside of the trouser. The cut length shall be 3/4 to 7/8 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric.

3.7.5 Bartacks. The bartacks shall measure 3/8 to 1/2 inch in length and be free from thread breaks and loose stitching.

3.7.6 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitching patterns, provided the requirements of the stitch patterns, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping, or backstitches are used to secure the ends of the stitching.

3.7.7 Thread ends. All thread ends that are visible on the finished trousers shall be trimmed to a length of not more than 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.8 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the trousers.

3.9 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show in the finished trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut trousers in strict accordance with patterns furnished, which show size, shape, directional lines, placement of pockets, and notches for the proper assembling of all parts. b. Cut all parts of the trousers out of one piece of material, except the fly parts, waistband facing, belt loops, hip pocket facings and bearers, thigh pocket facing, side hanging pocket facings, buttonhole or eyelet reinforcements where required and slide fastener thongs which may be cut from ends. c. Cut the slide fastener thongs to conform to the measurements specified in operations 4 and 5. d. Cut the aramid hook and loop portions of fastener tape in the following lengths: (1) Thigh pockets (2 each of hook and loop) - 9-3/8 ± 1/8 inches. (2) Hip pocket (2 each of hook and loop) - 4-7/8 ± 1/8 inches. (3) Calf pocket (2 each hook and loop) - 7-5/8 ± 1/8 inches. (4) Side pocket (2 each hook and loop) - 5-1/4 ± 1/8 inches.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) d. Cut the waistband facing in the direction of the warp to meet the requirements of operation 21. The waistband facing shall finish 1-1/2 to 1-3/4 inches in width and may be pieced with no more than one joining seam (in the finished trousers) with the seam spread open. The waistband facing may be strip cut to proper width and placed on rolls. e. Cut buttonhole and eyelet reinforcement pieces in either direction of adequate length and width to reinforce buttonhole or eyelet. f. Cut seven belt loops to conform to the finished measurements. The belt loops should measure 3/8 to 1/2 inch wide and 2 ± 1/4 inches long between bartacks when finished (see operation 8). g. Cut two pieces of the 5/8 inch webbing for waist adjustment straps 7-1/4 ± 1/8 inches for all sizes. h. Cut two pieces of the 5/8 inch webbing for the buckle attachment straps 2-1/2 to 2-3/4 inches long.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking.						
	a. Mark, ticket or bundle all component parts of the trousers except those parts cut from ends to ensure correct size, proper assembly and uniform shade throughout the trousers.						
	b. Any method of marking may be used except:						
	(1) Metal fastening devices.						
	(2) Sew-on tickets.						
	(3) Adhesive type tickets which leave traces of the adhesive on the material after removal of the tickets.						
	c. The use of an ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the trousers.						
4.	Make slide fastener thong.						
	a. Fold tape in half lengthwise with the raw edges turned in and stitch 1/16 to 1/8 inch from the turned under edge.	301	EFp-2	10-14	E	E	
	or						
	b. Fold under side raw edges with edges abutted or overlapped and double-stitch the length of the tape with a 1/4 inch gage.	406	EFh-1	10-14	E	B	
	c. The thong shall finish 1/4 ± 1/8 inch wide.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach thong to slide fastener pull tab.						
	a. Cut the thong 5-1/2 ± 1/2 inches in length.						
	b. Thread one end of thong through end of slide fastener pull tab and with ends even, bartack together with two vertical bartacks 1/2 to 3/4 inch apart, with the end of the top bartack 1/4 to 1/2 inch from the end of the slide fastener pull.	Bartack		28 per bartack	B	B	
6.	Labels.						
	Sew labels on the trousers in the locations specified below. Stitching shall not be through writing on the label.						
	a. Identification label. The identification label shall be placed on the inside of right hip pocket (as worn) so that on the finished trousers, the label shall face the wearer (see operation 15.b). The label shall not be caught in the pocket closing stitching, and the label shall be centered on the pocket. The label shall be stitched on all four sides with the stitching not more than 3/16 inch from the edge of the label.	301	LSbj-1	10-14	E	E	
	b. Size label. The size label shall be placed on the inside of the trousers, to the left of the seat seam. The top edge of the size label shall be caught in the bottom row of waistband facing stitching (see operation 21.d). The label may be tacked into position prior to the waistband stitching operation.	301	LSbj-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check this source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Labels. (cont'd)						
	c. Instruction label. The instruction label (when applicable) shall be placed on the inside of the trousers below the identification label (see operation 15.b). The top edge of the instruction label may be caught in the bottom edge stitching of the identification label. The label shall be stitched on all four sides with the stitching not more than 3/16 inch from the edge of the label.	301	LSbj-1	10-14	E	E	
	d. Combination identification and instruction label. The combination identification and instruction label shall be attached as specified in 6.a. above.	301	LSbj-1	10-14	E	E	
7.	Make waist adjustment straps.						
	a. Turn under raw edge of one end of waist adjustment strap 1/4 ± 1/16 inch and then turn the same end in 1 to 1-1/4 inches more. Stitch with a bartack, box stitch or tack 1/16 to 1/8 inch from the edge. An automatic line tack may be used.	301 or bartack or 301 line tack		10-12 28 per bartack 28 per tack	E B E	E B E	
	b. Thread unfinished end of strap over the first bar from lip and pull turned under end of tape toward lip.						
8.	Make belt loops.						
	Finished appearance. Make seven belt loops. The belt loops shall measure 3/8 to 1/2 inch wide and 2 ± 1/4 inches long.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make belt loops. (cont'd)						
	a. Fold under side raw edges, with edges abutted, and double-stitch the length of the loops. The stitching shall be 3/16 to 5/16 inch gage, using a cover stitch on the underside.	406	EFh-1	6-10	E	B	
	or						
	b. Fold loops in half lengthwise with the raw edges turned in and stitch 1/16 to 1/8 inch from each edge.	301	EFp-2	10-14	E	E	
	or						
	c. Fold stripping with both edges turned in and with the turned in edges abutted at center stitch with a covering stitch.	105	EFae-1	12-16	B	B	
9.	Make hip, thigh, and calf pocket flaps.						
	Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat, without twists, puckers, pleats or raw edges.						
	a. Fold pocket flap in half, with fabric face to face, and raw edges even and stitch sides leaving the top raw edges open.	301	SSe-2(a)	10-14	E	E	
	b. Turn flap, work out edges and corners. Stitch 1/4 ± 1/16 inch from the side and bottom edges.	301	SSe-2(b)	10-14	E	E	
	c. Overedge stitch the top raw edges of each pocket flap together.	503 or 504	EFd-1	6-10	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make hip, thigh, and calf pocket flaps. (cont'd)						
	d. Position loop portion of fastener tape to pocket flap as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	E	E	
10.	Make thigh pockets.						
	a. Fold the two pleats at marks indicated on pattern. Stitch along the two folds 1/8 ± 1/16 inch from the edge. The pleats shall face the back of the trousers.	301	OSf-1	10-14	E	E	
	b. With the top raw edges of facing and pocket turned under, stitch the facing to the top of the inside of pocket. Stitching shall be 3/32 to 1/8 inch from the edges.	301 or 401	LSk-2 LSk-2	10-14 10-14	E E	E B	
	or						
	c. Position the thigh pocket facing and thigh pocket, face to face with the raw edges even and stitch. Turn facing to inside of pocket and top stitch 1/16 to 1/8 inch from edge.	301	EFa-1	8-10	E	E	
	d. Turn in the bottom raw edge of facing 1/4 ± 1/16 inch and stitch to pocket 3/32 to 1/8 inch from folded edge of facing.	301	LSd-1	10-14	E	E	
	e. Position hook portion of fastener tape to pocket, as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make calf pockets.						
	a. Turn under top of pocket as indicated on pattern. Stitch 1/16 to 1/8 inch from folded edge.	301	EFb-1	10-14	E	E	
	b. Position hook portion of fastener tape to pocket as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	E	E	
	c. Raw edges of pockets may be prehemmed prior to attachment to trousers. The side and bottom edges may be turned under 3/8 inch and stitched 1/16 to 1/8 inch from the edge.	301	EFa-1	8-10	E	E	
12.	Make left fly.						
	a. Turn under the raw edges of left fly and stitch 1/16 to 1/8 inch from turned edge.	301	EFa-1	8-10	E	E	
	or						
	b. Overedge the raw edges of left fly.	503 or 504	SSa-1	6-10	B	B	
	c. Position the left half of the slide fastener with the bottom of the chain 1/2 to 3/4 inch above the fly notch and so that in the finished trousers, the edge of the chain is 1/2 ± 1/16 inch from the front edge of the fly and the top end of the chain is 1-3/4 ± 1/16 inches from the top of trousers.	301 and 301	SSa-2 LSd-1	10-14 10-14	E E	E E	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make left fly. (cont'd)						
	d. Turn under the top raw edge of the slide fastener tape and stitch the tape to the fly with two rows of stitching. Place the first row of stitching 1/8 ± 1/16 inch from the chain. Place the second row 1/4 ± 1/16 inch from the first row. Place a horizontal bartack across the top of the tape extension.	301 Bartack	LSbj-1	10-14 28 per bartack	E B	E B	
13.	Make right fly.						
	a. Place the right fly lining to the right fly, face to face and stitch 1/8 ± 1/16 inch. Turn out and edge stitch 1/16 to 1/8 inch from the edge. The lining shall not be exposed along the front edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	E E E	E B E	
	b. Overedge the back edge of fly lining and fly together.	503 or 504	SSa-1	6-10	B	B	
	c. Position the right half of the slide fastener 1/8 inch in from the back edge of the right fly with the button end of chain 1/2 to 3/4 inch above the fly notch. With the top end of the tape extension turned to one side (for catching in seam in a subsequent operation), stitch fastener tape to fly, with two rows of stitching. Place the first row of stitching 1/4 ± 1/16 inch from back edge of tape. Place a second row of stitching 1/4 ± 1/16 inch from the first row.	301	SSa-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Attach flies to fronts.						
	a. Position left fly to left front, face to face, and stitch across top and down front to notch, with notches matching. Trim corner.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	E E	E B	
	b. Turn left fly to inside of trousers and edge stitch 1/16 to 1/8 inch from folded edge.	301	SSe-2(b)	10-14	E	E	
	c. Stitch right fly to right front matching notches and catching fastener tape in the seam. Turn the seam towards the side of trousers and raise stitch through all plies from top of trousers to base of fly, 1/16 to 1/8 inch from the edge.	301 or 401 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	E E E	E B E	
15.	Make hip pockets and attach identification and instruction labels.						
	Finished appearance. The hip pockets shall be uniform in width and depth. Ends of the openings where the cord facings are turned in shall be neatly finished without raw edges or pleats. The right and left pockets shall be in alignment.						
	a. Position pocket bearer to pocket according to the line on the pattern, with the lower edge turned in. Stitch 1/16 to 1/8 inch from the folded edge.	301	LSd-1	10-14	E	E	
	NOTE: When bearer edge is cut on the selvage, the edge need not be overedged nor turned in.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. Operation requirements (cont'd)

NO.	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	b. Place the identification label and the instruction label on the right pocket so that on the finished trousers the label will face the wearer (see operations 6.a. and 6.c.). The label shall be positioned below the pocket opening. Stitch on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14	E	E	
	c. Position hip pocket flap bottom raw edges on mark indicated on the pattern for pocket opening on trouser back. Position hip pocket on underside of trouser back matching pocket opening marks. Stitch through all plies 1/4 to 3/8 inch from raw edges of flap.	301	LSq-2(a)	10-14	E	E	
	d. Position facing parallel to flap raw edges on outside of trouser and stitch 3/16 to 1/4 inch from edge on flap.	301	SSbe-2(a)	10-14	E	E	
	e. Cut opening between rows of stitching and tongue notch ends.						
	f. Turn pocket facing piece through opening and edge stitch 1/16 to 1/8 inch from seam through trouser forming a cord 3/16 to 1/4 inch wide.	301	SSbe-2(b)	10-14	E	E	
	g. Turn in the bottom raw edge of the facing piece and stitch to pocket 1/16 to 1/8 inch from the edge.	301	LSd-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	NOTE: When bottom edge is cut on the selvage, the edge need not be overedged nor turned in.						
	h. Position hook fastener tape to trouser back (on outside of trousers), as indicated on pattern, and stitch through trousers and one layer of pocket. Do not stitch through both layers of pocket. Stitch on all four sides of hook fastener tape 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	E	E	
	i. Seam side raw edges of pocket, turn and edge stitch 3/16 to 1/4 inch from the edge. Edge stitching may continue across the bottom folded edge. The raw edges of the pocket shall be on the inside.	301 and 301	SSe-2 OSf-1	10-14 10-14	E E	E E	
	j. Turn down flap over pocket opening and raise stitch 1/16 to 1/8 inch through the trousers, flap seam allowance, pocket bearer and pocket. Continue the stitching across the openings of the ends, catching the turned in tongues. Place a vertical bartack at each end of pocket opening.	301 Bartack	LSq-2(b)	10-14 28 per bartack	E B	E B	
	or						
	Repeat operation 15.c and:						
	k. Cut pocket opening and tongue notch ends.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check 23 source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	l. Position hip pocket bearer to pocket according to line on pattern with raw edge turned under and stitch 1/16 to 1/8 inch from folded edge.	301	LSd-1	10-14	E	E	
	m. Fold facing in half, position raw edges to the end of pocket and safety stitch together.	515 or 516 or 519	SSa-2 SSa-2 SSa-2	10-14 10-14 10-14	B Chain stitching B (overedge stitching	B B 	
	n. Turn under the lower edge of pocket opening and stitch 1/16 to 1/8 inch from folded edge through facing forming a cord 3/16 to 1/4 inch wide. The raw edges of seams joining facing cord to pocket shall finish between outside of the pocket and trousers.	301	LSd-1	10-14	E	E	
	o. Form pocket by safety-stitching the sides together. Finish flap by repeating operation 15.j.	515 or 516 or 519	SSa-2 SSa-2 SSa-2	10-14 10-14 10-14	B (Chain stitching B (overedge stitching	B B 	
	or						
	p. Repeat operations 15.k through o. and:						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	q. Position pocket to underside of trousers according to pocket opening marks; turn under the top edge of pocket opening, insert top of flap 1/4 to 3/8 inch and raise stitch through trousers 1/16 to 1/8 inch from fold catching the raw edges of the flap, bearer, and pocket opening. Continue across the opening of the ends catching the turned in tongues and tacking pocket.	301	LSd-1	10-14	E	E	
	r. Operations c. through f. may be performed by an automatic stitching machine which sets the flap, stitches, cuts, and turns piped edges in one operation. Facing edge shall be turned under and stitched to pocket as in operation 10.d. When this method is used, the ends of the pocket opening shall be securely tacked, and the top corded edge shall finish under the flap, or the top cord may be deleted when an automatic stitching machine is used. Raise stitching of lower edge should be through the trouser back and piping piece only.	101 or 301		10-14	E	E	
	s. Raise stitch flap through trouser back, flap seam allowance, piping, pocket and bearer 1/16 to 1/8 inch from seam.	301		10-14	E	E	
	t. Close sides of pocket by safety stitching the sides together.	515 or 516 or 519	SSa-1 SSa-1 SSa-1	10-14 10-14 10-14	E (chain stitching) B (overedge stitching)	B B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make and stitch side hanging pockets.						
	Finished appearance. The pocket openings shall be uniform in appearance and the edges shall finish smooth and flat without distortion. The pocket openings shall finish not less than 6 inches.						
	a. Overedge stitch the front raw edges of bearers.	502 or 503 or 504	EFd-1 EFd-1 EFd-1	10-14 10-14 10-14	B B B	B B B	
	b. Overedge stitch the back raw edges of facings.	502 or 503 or 504	EFd-1 EFd-1 EFd-1	10-14 10-14 10-14	B B B	B B B	
	or						
	c. When the back edge of the facings are selvaged, they need not be overedged.						
	or						
	d. In lieu of operations a. and b., the raw edges may be turned under and caught in the stitching when performing operations e. and f.						
	e. Position bearer on pocket, as indicated on pattern, and stitch bearer to pocket along front edges of bearer.	301 301	SSa-1 or LSd-1	10-14 10-14	E E	E E	
	f. Position facing on pocket with ends of facing equidistant from notches and stitch facing to pocket along back edge of facing.	301 301	SSa-1 or LSd-1	10-14 10-14	E E	E E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make and stitch side hanging pockets. (cont'd)						
	g. Fold pocket in half, seam and overedge stitch bottom edges.	515 or 516 or 519	SSa-2 SSa-2 SSa-2	10-14 10-14 10-14	E (chain stitching) B (overedge stitching)	B B	
	or						
	h. Fold pocket in half, stitch, turn and edge stitch bottom edges, 1/8 to 3/16 inch from turned edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	E E E	E B E	
	and						
	i. Position front of pocket to front of trousers, matching notches and stitch pocket to front; turn pocket to inside and double stitch edge or single stitch edge 3/16 to 1/4 inch from edge, from top of trousers to edge of outseam.	301 or 401 and 301 301	SSe-1 SSe-1 SSe-3(b) or SSe-2(b)	10-14 10-14 10-14 10-14	E E E E	E B E E	
	j. Position front on bearer. Stitch above and below pocket opening through trouser and bearer with one row of stitching 1/16 to 3/32 inch from the edge.	301	LSd-1	10-14	E	E	
17.	Join outseams.						
	Finished appearance. The outseams shall be carefully joined with notches matching, free of twists, puckers, pleats or raw edges. The seams						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Join outseams. (cont'd)						
	shall start and finish evenly. Pocket openings shall not show excessive fullness or pleats in the joining of the seams, and shall not be caught in the seam stitching.						
	a. Form knee pleat as indicated on pattern. Join outseams with a double-lapped and double-stitched seam, with the fronts of trousers lapping the backs. The outside folds of the pleat shall face toward the bottom of trousers.	301 or 401	LSc-2 LSc-2	10-14 10-14	E E	E B	
	b. The pleat may be held in place by a holding stitch no more than 1 inch from side raw edge, stitched along pleat fold.	301 or 401	OSe-1 OSe-1	10-14 10-14	E E	E B	
	or						
	c. Pleat may be held in place by a bartack, but the bartack must be buried in the leg seams and not be visible from the front view of the trousers.	Bartack		28 per bartack	B	B	
18.	Attach thigh pockets and flaps.						
	Finished appearance. The bellows side of the thigh pocket shall finish towards the back. Pockets shall be uniformly stitched and properly positioned with the top corners of pocket opening covered by the flap.						
	a. Mark the position of the thigh pockets and flaps, as indicated on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach thigh pockets and flaps. (cont'd)						
	b. Turn in the seam allowance on the pocket. Stitch pocket to trousers, positioned as marked, with one row of stitching 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	E	E	
	c. Bartack top edges of pocket opening with vertical bartacks in line with pocket stitching through pocket and trousers.	Bartack		28 per bartack	B	B	
	d. Position overedged edges of flap above pocket opening as indicated on pattern and join to trousers 1/8 to 3/16 inch from the raw edges. Turn flap down and raise stitch 3/16 to 1/4 inch from turned edge making sure to bury the raw edges within the seam.	301 or 401 and 301	LSb1-2	10-14 10-14 10-14	E E E	E B E	
	or						
	e. Turn in top edge of flap, position on trousers, as indicated on patterns, and double-stitch making sure to bury the overedged edges within the seam.	301	LSd-2	10-14	E	E	
19.	Attach calf pockets and flaps.						
	Finished appearance. The pockets shall be uniformly stitched and properly positioned with the top corners of pocket opening covered by the flap.						
	a. Mark the position of the calf pockets and flaps, as indicated on the pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Attach calf pockets and flaps. (cont'd)						
	b. Turn in raw edges of pockets 3/8 inch if not prehemmed, and position on trouser, as indicated on pattern. Stitch the sides and bottom of pocket to the trousers 1/16 to 1/8 inch from the turned in edges. Stitching shall superimpose prehemming stitching when this option is selected.	301	LSd-1	10-14	E	E	
	c. Place a vertical bartack at the top of each side of pocket. The bartack should be superimposed over the stitching line.	Bartack		28 per bartack	B	B	
	d. Position overedged edges of flap above pocket opening as indicated on pattern and join to trousers 1/8 to 3/16 inch from the raw edges. Turn flap down and raise stitch 3/16 to 1/4 inch from turned edge making sure to bury the raw edges within the seam.	301 or 401 and 301	LSb1-2	10-14 10-14 10-14	E E E	E B E	
	or						
	e. Turn in top edge of flap, position on trousers, as indicated on patterns, and double-stitch making sure to bury the overedged edges within the seam.	301	LSd-2	10-14	E	E	
20.	Join seat seam.						
	Join the seat seam with a double-lapped, double-stitched seam. The seat seam may lap in either direction.	401	LSc-2	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. Finished appearance. The waistband lining shall finish flat and smooth without twists, puckers, pleats or raw edges. The top edges of the side hanging pockets shall extend into the waistband area and shall be caught under the bottom stitching of the waistband lining. The finished waistband lining shall measure 1-5/8 ± 1/8 inches wide. a. Position the belt loops as follows: (1) One centered on left front, midway between front edge and outseam. (2) One centered on right front, midway between front edge of fly and outseam. (3) One adjacent to each outseam on back. (4) One adjacent to seat seam on left back. (5) One each midway between belt loops at outseam and seat seam.						
	b. Position waistband lining to waistband. Waistband lining shall extend 1-1/4 ± 1/16 inches from left front edge of trousers. Stitch lining to top of trousers, 3/8 ± 1/16 inch from edge, catching one end of belt loops and top edges of hip hanging pockets (for grown on waistband construction only) in the stitching. The belt loops may also be attached separately as in operation 21.f.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	E E	E B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	c. Turn waistband to inside of trousers and work out top edges. Turn under raw end of waistband lining at right front edge and stitch 1/16 to 1/8 inch from top edge continuing down right front waistband. Bottom raw edge on right ends shall be turned under and caught in stitching. Belt loops shall not be folded over the top of trousers and caught in edge stitching.	301 or 401 and 301	SSe-2(b) SSe-2(b) SSb-1	10-14 10-14 10-14	E E E	E B E	
	d. Turn under remaining bottom raw edges of waistband lining and stitch 1/16 to 1/8 inch from edge, catching hip pocket and size label at left of center seam. The back edge of lining shall not be caught in the stitching. The label may be tacked to the turned-in bottom of the lining prior to waistband stitching.	301 or 401	LSd-1 LSb-1	10-14 10-14	E E	E B	
	or						
	e. Waistband lining operations indicated in operations 21.c and 21.d may be combined in one operation.	301 or 401	LSk-2 LSk-2	10-14 10-14	E E	E B	
	f. As an alternate, the belt loops may be attached after the waistband has been completed. Position the belt loops as indicated on pattern and with the ends turned in, bartack top and bottom ends of loops to trousers. The belt loops shall finish 2 ± 1/4 inches between bartacks. When belt loops are inserted into the waistband stitching, the loops shall be	Bartack		28 per bartack	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	bartacked at top and bottom with the bottom raw end turned in. Bottom bartack shall not be through size label at back of trousers.						
	or						
	Finished appearance. The waistband and waistband lining shall finish flat and smooth without twists, puckers, pleats, or raw edges. The top edges of the side hanging pockets shall extend into the waistband area and shall be caught in the two rows of bottom stitching of the waistband. The lining shall measure 1-5/8 ± 1/8 inches wide.						
	g. Position waistband lining on face side of waistband and stitch 3/8 ± 1/16 inch from edges. Turn and edge stitch 1/16 to 1/8 inch from edge.	301 or 401	SSe-2	10-14	E E	E B	
	or						
	h. Fold in edges of waistband and waistband lining 3/8 ± 1/16 inch and edge stitch 1/16 to 1/8 inch from edge.	301 or 401	SSc-1	10-14	E E	E B	
	i. Position waistband on top of trousers, face to face, and stitch 3/8 ± 1/16 inch from edge.	301 or 401	SSa-1	10-14	E E	E B	
	j. Turn waistband to finished position, turn bottom edge of waistband lining and stitch through trouser waistband and waistband lining with a double row of stitching 3/16 inch gage, catching label at center back.	301 or 401	Finished seam is LSco-4	10-14	E E	E B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	or						
	k. Operations 21.g, 21.h, 21.i and 21.j, may be performed in one operation using a folder, and a double row of stitching 3/16 inch gage to attach waistband and lining to trouser top.	301 or 401	LSbc-3	10-14	E E	E B	
	l. Turn front end of right waistband inward and stitch along tucked in edge.						
22.	Finish left fly.						
	Stitch back edge of left front of trousers through front from top of trousers to bottom of crotch seam with stitching 1-3/4 to 2 inches from front edge and tapering to front edge at base of fly opening.	301	SSv-1	10-14	E	E	
23.	Join crotch seam.						
	Position left front over right front along crotch seam with left front seam allowance turned under. Seam with two rows of stitching. The stitching shall terminate 2-3/4 to 3 inches from inseam.	301	LSb-2	10-14	E	E	
24.	Join inseams.						
	a. Form knee pleats, as indicated by notches on pattern and join inseams in one continuous operation with a double-lapped and double-stitched seam with the fronts lapping the backs. The outside fold of pleats shall be toward the bottom of the trousers, and the crotch and seat seams shall not be staggered more than 5/8 inch (measurement taken from center of seams).	301 or 401	LSc-2 LSc-2	10-14 10-14	E E	E B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check this source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Join inseams. (cont'd)						
	b. Pleats may be held in place by a holding stitch no more than 1 inch from side raw edge stitched along pleat folds.	301 or 401	OSe-1 OSe-1	10-14 10-14	E E	E B	
	or						
	c. Pleats may be held in place by a bartack but the bartack must be buried in the leg seams and not be visible from the front view of the trousers.	Bartack		28 per bartack	B	B	
25.	Attach two waist adjustment straps to waistband.						
	a. Thread attachment strap through second bar from lip end; fold back one end over opposite end 1/4 to 3/8 inch.						
	b. Position folded-in end on center of waistband, 5/8 to 3/4 inch in front of outseam with buckle lip toward back of trousers. Double bartack (vertically) strap to trousers, 1/16 to 1/8 inch from back edge and 1/8 to 3/16 inch apart. Bartack shall not be through side seam.	Bartack		28 per bartack	B	B	
	c. Thread free end of waist adjustment strap under back belt loops, extend full length, turn under raw edge 1/4 to 3/8 inch and double bartack (vertically) strap to trousers, 1/16 to 1/8 inch from folded edge and 1/8 to 3/16 inch apart.	Bartack		28 per bartack	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
26.	Make buttonhole for leg hem drawtapes.						
	a. Make two buttonholes to finish in center of underside of trouser hem through reinforcement piece at front of each trouser leg, as indicated on pattern. Position the eyelet end of buttonhole toward front of trouser. Reinforcement piece shall be of sufficient width and length to reinforce drawtape outlets. The reinforcement pieces may be prestitched into position prior to making drawtape outlets.	Buttonhole		52-56 per buttonhole including tack	30	50	
	or						
	b. Make two sewn eyelets through reinforcement, positioned as indicated for the eyelet end of the buttonhole.	Eyelet		19-24 per eyelet	70	70	
	or						
	c. Make two 1/2 to 5/8 inch, straight-cut buttonholes tacked at both ends, through reinforcement and positioned as indicated on pattern.	304		52-56 per buttonhole including tack	30	50	
	or						
	d. Thread tape through buttonholes or eyelets with tape crossed between outlets and extending around the bottom of each leg, and knot ends.						
	e. Bartack the leg hem tape through the underside of leg bottoms at center of back part; or bartack the tape through the finished hem.	Bartack		28 per bartack	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
27.	Hem leg bottoms. Turn up leg bottoms as indicated on pattern. Turn in the raw edge 1/4 to 3/8 inch and single stitch 1/16 to 1/8 inch from the edge. The hem shall finish 1 ± 1/4 inch wide.	301	EFb-1	10-14	E	E	
28.	Make waistband buttonhole. Mark and make horizontal buttonhole through all plies at the waist of left front with the inside edge of the eyelet 3/8 to 1/2 inch from the front edge and centered horizontally on waistband lining. The buttonhole purling shall finish on the outside of the trousers.	Buttonhole	52-56	E per button-hole includ-ing tack	B		
29.	Mark or gage and sew on button. Sew waist button on right front to correspond with eyelet end of buttonhole in left front.	101 or 301		14-16 per button 14-16 per button	E		
30.	Clean trousers. a. Trim all ends of stitching to 1/4 inch maximum length throughout (inside and outside) and remove loose threads from the trousers. b. Remove all spots, stains, and visible shade or size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The finished measurements shall be as shown in table II.

TABLE II. Finished measurements (inches)

Size	1/2 Waist 1/	Inseam 2/	Outseam 3/	Bottom 4/
X-Small - Short	13-1/2	30-1/4	40-1/4	17
X-Small - Regular	13-1/2	32-1/4	42-3/4	17
X-Small - Long	13-1/2	34-1/4	45-1/4	17
Small - Short	15-1/2	30-1/4	40-3/4	17
Small - Regular	15-1/2	32-1/4	43-1/4	17
Small - Long	15-1/2	34-1/4	45-3/4	17-3/4
Medium - Short	17-1/2	30-1/4	41-1/4	17-3/4
Medium - Regular	17-1/2	32-1/4	43-3/4	17-3/4
Medium - Long	17-1/2	34-1/4	46-1/4	17-3/4
Large - Short	19-1/2	30-1/4	41-3/4	17-3/4
Large - Regular	19-1/2	32-1/4	44-1/4	17-3/4
Large - Long	19-1/2	34-1/4	46-3/4	17-3/4
X-Large - Short	21-1/2	30-1/4	42-1/4	18-1/2
X-Large - Regular	21-1/2	32-1/4	44-3/4	18-1/2
X-Large - Long	21-1/2	34-1/4	47-1/4	18-1/2
Tolerance	± 1/2	± 3/4	± 3/4	± 1/2

1/ Measured along center of waistband from folded edge to folded edge.

2/ Measure inseam of trousers from crotch seam to bottom edge of trouser leg.

3/ Measure from top edge of waist to bottom of leg along outseam.

4/ Measure across bottom of leg. Multiple by two.

3.11 Workmanship. The finished trousers shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to the requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for visual and dimensional defects as specified in MIL-STD-1488.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.4.2 Point count inspection (see 6.7). Sampling and inspection provisions for end item examination of trousers "U", dimensional examination and packaging examination shall be performed in accordance with MIL-STD-1488.

4.4.3 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each pair or trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23-1/2 inches. Before folding the regular and long trousers to the required length, the leg bottoms shall first be folded over approximately 4 inches. For the larger sizes, it may be necessary to adjust the seat area to achieve the desired width of approximatley 14-1/2 inches. Five folded trousers, of one size only, shall be neatly stacked in a bundle with waistbands alternated and the bundle securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial. Trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Thirty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Trousers bundled as specified in 5.1.1 shall be packed flat, six in depth, within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping for type II, class F loads.

5.2.2 Level B packing. Thirty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Trousers bundled as specified in 5.1.1, shall be packed flat, six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

5.2.3 Commercial packing. Trousers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), trousers, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are for wear by aviator crewmen of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article sample is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

6.5 International standardization agreement. Certain provisions of this document are the subject of international standardization agreement as cited in NATO, STANAG 2333. When amendment, revision, or cancellation of this document is proposed, which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

6.6 Suggested resin. A suggested resin (see 3.3.6.2) for dipping ends of slide fastener thongs is "No Fray No. 64", Champion Packaged Products, Inc., 4939 South Austin Avenue, Chicago, IL 60638.

6.7 Point count system. This specification contains the requirements for a point count system for sampling and inspection of the end item. For the visual examination, point values of 1, 2 or 3 are assigned to the listed defects depending on severity. The higher point values are assigned to those defects having a more detrimental effect on the appearance or serviceability of the items.

6.8 Subject term (key word) listing.

Aviator
Crewchief
Flight clothing

Custodians:
Army - GL
Navy - NU
Air Force - 99


Preparing activity:
Army - GL

(Project 8415-0681)


Review activities:
Army - MD
Air Force - 82
DLA - CT

User activity:
Air Force - 45
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

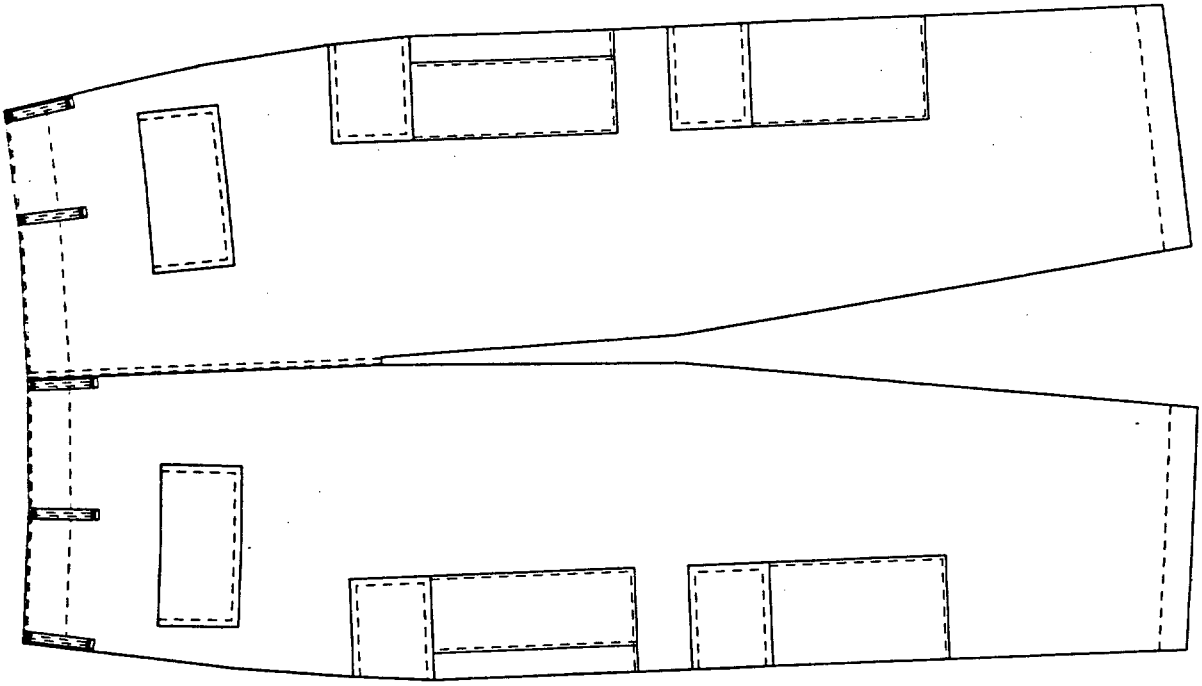

BACK

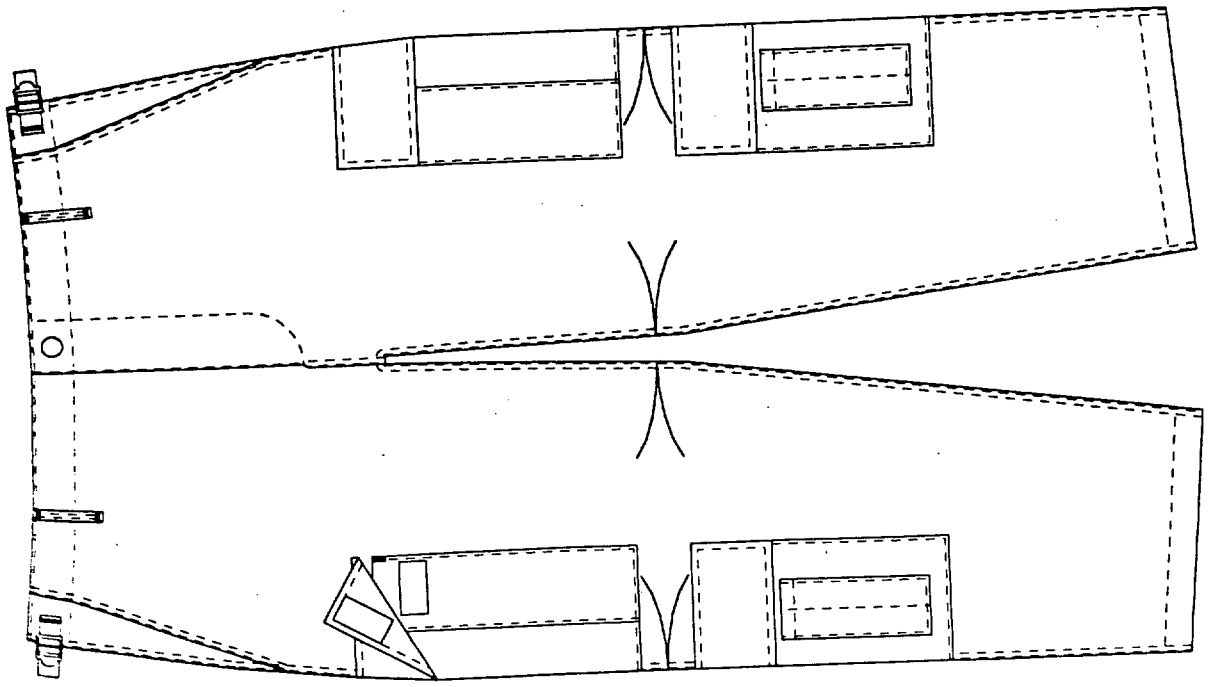

FRONT

FIG. 1 - TROUSERS, AIRCREW, CAMOUFLAGE PATTERN: COMBAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-44372	Trousers, Aircrew, Camouflage Pattern: Combat

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.