INCH-POUND

MIL-T-44372A
30 September 1991
SUPERSEDING
MIL-T-44372
5 June 1989

MILITARY SPECIFICATION

* TROUSERS, AIRCREW, COMBAT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers plain weave, aramid, combat trousers for use by aircrew personnel.

* 1.2 Classification. The trousers shall be of the following classes and sizes as specified (see 6.2).

Class 1 - Woodland Camouflage
Class 2 - Tan 380

Schedule of sizes

X-Small	Small	Medium	Large	X-Large
Short	Short	Short	Short	Short
Regular	Regular	Regular	Regular	Regular
Long	Long	Long	Long	Long

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
A-A-50195	-	Thread, Aramid
A-A-50198	-	Thread, Gimp, Cotton, Buttonhole
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fastener, Slide, Interlocking
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-F-21840	-	Fastener Tapes, Hook and Loop, Synthetic
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-W-43685	-	Webbing, Tape, Textile, Aramid Fiber
MIL-T-43709	-	Tape, Textile, Aramid
MIL-T-44100	-	Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-C-83429	-	Cloth, Plain and Basket Weave, Aramid

STANDARDS

FEDERAL

FED-STD-595	-	Colors Used in Government Procurement
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1488 - Provisions for Evaluating Quality of Trousers

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

* 3.2.1 Basic material. The basic material for class 1 trousers shall be plain weave aramid printed with a Woodland Camouflage Pattern conforming to type II, class 5 of MIL-C-83429. The basic material for the class 2 trousers shall be plain weave aramid conforming to type II, class 6 of MIL-C-83429. The color for class 2 shall be Tan 380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 3.2.2 Material for side hanging pockets, waistband lining, right fly, and left fly. The cloth for the side hanging pockets, waistband lining, right fly, and left fly shall be basic material, ground shade cloth, or printed seconds cloth. The cloth for class 1 shall be colored to a ground shade conforming to class 5 of MIL-C-83429 prior to overprinting of the camouflage pattern. Ground shade cloth shall meet the physical, mechanical, and dimensional requirements of the respective finished fabric. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage print patterns, cited in MIL-C-83429 for the class 1 trousers.

* 3.2.3 Webbing. The webbing for the waist adjustment straps shall conform to type I of MIL-W-43685. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. The width of the webbing shall be 5/8 inch.

* 3.2.3.1 Tape, textile, aramid. The tape for the leg drawcords shall be 1/4 inch wide and shall conform to MIL-T-43709. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. Ends of the drawcords shall be seared or dipped in a colorless, noncombustible resin (see 6.5).

3.2.4 Buckles. The buckles for the waist adjustment straps shall be tongueless, 2-bar conforming to type II, style 3, class 3, 5/8 inch of MIL-B-543.

* 3.2.5 Hook and loop fastener tape. The hook and loop fastener tape shall be 1 inch in width and shall conform to type I, class 1, of MIL-F-21840. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. The colorfastness requirements shall not apply.

* 3.2.6 Slide fastener. The slide fasteners listed below shall be brass with a black chemical finish and conform to type I, style 15, size MS of V-F-106.

Slide fastener lengths (inches)

Size	Length
X-Small - Short	6-1/2
X-Small - Regular	7
X-Small - Long	7-1/2
Small - Short	7
Small - Regular	7-1/2
Small - Long	8
Medium - Short	7-1/2
Medium - Regular	8
Medium - Long	8-1/2
Large - Short	8
Large - Regular	8-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

Slide fastener lengths (inches) (cont'd)

Size	Length
Large - Long	9
X-Large - Short	8-1/2
X-Large - Regular	9
X-Large - Long	9-1/2

* 3.2.6.1 Slide fastener tape. The slide fastener tape shall be aramid, 3/4 inch wide and be of sufficient length to comply with the slide fastener attachment operation. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. The finished tape shall show colorfastness to light and laundering equal to or better than the standard sample. When no standard sample is available, the tape shall show "fair" fastness to light after six standard fading hours, and "good" fastness to laundering.

* 3.2.6.2 Slide fastener thong. Each slide fastener shall be furnished with a thong of sufficient length to measure 2-1/2 to 3 inches (folded) when attached to slider pull tab. The thong shall be 1/4 inch wide, conforming to MIL-T-43709. The color for class 1 shall be Olive Green 106 and for class 2 shall be Tan 380. Ends of the thong shall be seared or dipped in a colorless, noncombustible resin (see 6.5). The thong shall be attached to slider pull tab as specified in table I, operation 5.

* 3.2.7 Button. The button for the waist closure shall conform to type II, class D, style 26, 30-line of V-B-871. The button shall have a dull finish. The color for class 1 shall be Olive Green BP, Cable No. 62016 and for class 2 shall be Tan AJ, Cable No. 62028.

* 3.2.8 Gimp. The cotton gimp for reinforcing the waist closure buttonhole shall conform to type I or II, size No. 8 of A-A-50198. The color for class 1 shall be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380.

3.2.9 Thread.

* 3.2.9.1 Aramid and para-aramid. The thread shall be aramid, 40 and 60 tex conforming to A-A-50195. Para-aramid spun staple thread, size T-35 for class 1 and size T-50 for class 2 conforming to MIL-T-44100 may be used as an alternate to aramid 40 and 60 tex. The color of the thread for class 1 shall be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380. The thread shall show fastness to laundering equal to or better than the standard sample. When no standard is available, the thread shall show "good" fastness to laundering.

* 3.2.9.2 Cotton-covered polyester core. Cotton-covered polyester core thread conforming to ticket No. 50, 2 ply of A-A-50199 may be used as an alternate thread for bartacking. The color of the thread for class 1 shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

be Camouflage Green 483 approximating color chip 34094 of FED-STD-595 and for class 2 shall be Tan 380 and shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering.

* 3.2.10 Labels. Each pair of trousers shall have an identification label, an instruction label, and a size label or a combination identification and instruction label. The labels shall conform to the requirements listed below. The color of the label for class 1 shall be Medium Green, Cable No. 70034, 70130, or 70131 and for class 2 shall be Khaki, Cable No. 70188. The fastness to laundering requirements of DDD-L-20 shall apply.

* 3.2.10.1 Identification label. The identification label shall conform to type VI, class 1 of DDD-L-20.

* 3.2.10.2 Instruction label. The instruction label shall conform to type VI, class 3 of DDD-L-20. The label shall contain the following information:

TROUSERS, AIRCREW, COMBAT

1. Adjust waist size by straps on waistband.

2. Blouse trousers outside of boots using drawcords.

3. These trousers are of low flammability. No other special flame resistant treatment is required.

4. Hand/Machine Washing: Permanent press cycle in warm water with a mild laundry detergent.

5. DO NOT STARCH OR CHLORINE BLEACH.

6. Rinsing: Rinse thoroughly in clear warm water after laundering. Detergent must be removed or fabric flame resistance will be reduced.

7. Drying: Tumble dry at low heat (130°F). Remove immediately from dryer. To drip dry, remove from water and place on a rustproof hanger.

WARNING Launder with slide fastener and hook and loop fasteners engaged. Do not press hook and loop fasteners.

DO NOT REMOVE THIS LABEL

* 3.2.10.3 Combination label. A combination identification and instruction label may be used. It shall conform to type VI, class 15 of DDD-L-20.

* 3.2.10.4 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The size information shall be printed with not less than 10 point characters and shall contain the following information, as applicable:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

X-Small - Short	X-Small - Regular	X-Small - Long
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: Up to 27 inches	Waist: Up to 27 inches	Waist: Up to 27 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/5869	NATO Size: 7583/5869	NATO Size: 8390/5869
Small - Short	**Small - Regular**	**Small - Long**
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: From 27 to 31 inches	Waist: From 27 to 31 inches	Waist: From 27 to 31 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/6979	NATO Size: 7583/6979	NATO Size: 8390/6979
Medium - Short	**Medium - Regular**	**Medium - Long**
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: From 31 to 35 inches	Waist: From 31 to 35 inches	Waist: From 31 to 35 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/7989	NATO Size: 7583/7989	NATO Size: 8390/7989
Large - Short	**Large - Regular**	**Large - Long**
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: From 35 to 39 inches	Waist: From 35 to 39 inches	Waist: From 35 to 39 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/8999	NATO Size: 7583/8999	NATO Size: 8390/8999
X-Large - Short	**X-Large - Regular**	**X-Large - Long**
Inseam: 26-1/2 to 29-1/2 inches	Inseam: 29-1/2 to 32-1/2 inches	Inseam: 32-1/2 to 35-1/2 inches
Waist: Above 39 inches	Waist: Above 39 inches	Waist: Above 39 inches
Stock No.	Stock No.	Stock No.
NATO Size: 6775/9909	NATO Size: 7583/9909	NATO Size: 8390/9909

* 3.3 Design. The trousers shall have a slide fastener fly closure. The trousers contain two cargo pockets, two calf patch pockets, two side hanging pockets, two hip pockets, and leg hem drawcords. All pockets except side hanging pockets contain flaps. Hook and loop fastener tape is used for all pocket closures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.4 Figure. Figure 1 is furnished for information only. To the extent of any inconsistencies between the figure and the specification, the specification shall control.

3.5 Patterns. Standard patterns, which provide a 1/2 + 1/8, -0 inch seam allowance for double-lapped and double-stitched seams and 3/8 + 1/8, -0 inch seam allowance for single needle seams, except where otherwise specified, will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

* 3.5.1 List of pattern parts. The components of the trousers shall be cut from material as specified in accordance with the pattern parts indicated below.

List of pattern parts

Material	Nomenclature	Cut parts
Aramid, plain weave	Cargo pocket	2
	Cargo pocket flap	2
	Front 1/	2
	Back 1/	2
	Side hanging pocket 1/	2
	Side hanging pocket bearer 1/	2
	Side hanging pocket facing 1/	2
	Left fly	1
	Right fly	2
	Hip pocket	2
	Hip pocket facing 2/	2
	Hip pocket bearer 2/	2
	Hip pocket flap	2
	Calf pocket	2
	Calf pocket flap	2
Alternate sewn-on waistband construction	Front	2
	Back	2
	Side hanging pocket bearer	2
	Side hanging pocket facing	2
	Left fly	1
	Waistband 3/	1
	Right fly	2
	Side hanging pocket	2
	Hip pocket	2
	Waistband lining 3/	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

1/ When alternate sewn-on waistband and fly patterns are used, disregard these patterns pieces.

2/ Hip pocket facing and bearer are cut from the same pattern part.

3/ Waistband and waistband lining are cut from same pattern part.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. All stitches, seams, and stitching types specified in table I shall conform to FED-STD-751. When two or more methods of seams or stitch types are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the coat. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. The guides and knives on the overedge machines shall be set to trim only the ravelled ends of the fabric. Seams required to be worked out having a depth between the fold of 1/8 inch or more shall be considered a defect.

3.6.2 Type 301 stitching. Ends of stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continous line of stitching shall be overlapped not less than 1/2 inch except on labels where a minimum of a three stitch overlap is required. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by over-stitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. When damaged thread has been removed, needle holes do not constitute damage to the material. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

3.6.2.2 Repairs of types 401, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.2.1.a and 3.6.2.1.b. Repairs to stitch type 401 may be accomplished by using stitch type 301, except when used for eyelets.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6.4 Buttonholes. The buttonhole on the trouser waistband shall be eyelet end tapered bar type worked over gimp as specified in 3.2.8. The purling shall be on the outside of the trouser. The cut length shall be 3/4 to 7/8 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric.

3.6.5 Bartacks. The bartacks shall measure 3/8 to 1/2 inch in length and be free from thread breaks and loose stitching.

* 3.6.6 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table I, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a Government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.6.7 Thread ends. All thread ends that are visible on the finished trousers shall be trimmed to a length of not more than 1/4 inch.

* 3.6.8 Eyelets. Eyelets for alternate leg bottom draw tape shall be sewn with purling on the outside with a 3/16 to 1/4 inch diameter finished opening. The width or bight of stitching around the eyelet shall be not less than 1/16 inch. The eyelet stitching shall have at least four overlapping stitches.

3.7 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the trousers.

3.8 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show in the finished trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Cut trousers in strict accordance with patterns furnished which show size, shape, directional lines, placement of pockets, and notches for the proper assembling of all parts.						
*	b. Cut all parts of the trousers out of one piece of material except the fly parts, waistband facing, belt loops, hip pocket facings and bearers, side hanging pocket facings, buttonhole or eyelet reinforcements where required and slide fastener thongs which may be cut from ends.						
	c. Cut the slide fastener thongs to conform to the measurements specified in operations 4 and 5.						
	d. Cut the aramid hook and loop portions of fastener tape in the following lengths:						
*	(1) Cargo pockets (two each of hook and loop) - 7 ± 1/8 inches.						
	(2) Hip pockets (two each of hook and loop) - 4-7/8 ± 1/8 inches.						
*	(3) Calf pockets (two each hook and loop) - 8-1/4 ± 1/8 inches.						
	(4) Side pockets (two each hook and loop) - 5-1/4 ± 1/8 inches.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
*	e. Cut the waistband lining in the direction of the warp to meet the requirements of operation 21. The waistband lining shall finish 1-1/2 to 1-3/4 inches in width and may be pieced with no more than one joining seam (in the finished trousers) with the seam spread open. The waistband lining may be strip cut to proper width and placed on rolls.						
	f. Cut buttonhole and eyelet reinforcement pieces in either direction of adequate length and width to reinforce buttonhole or eyelet.						
*	g. Cut seven belt loops to conform to the finished measurements. The belt loops should measure 3/8 to 1/2 inch wide and 2 ± 1/4 inches long between bartacks when finished (see operations 8 and 21f).						
	h. Cut two pieces of the 5/8 inch webbing for waist adjustment straps 7-1/4 ± 1/8 inches for all sizes.						
	i. Cut two pieces of the 5/8 inch webbing for the buckle attachment straps 2-1/2 to 2-3/4 inches long.						
*	j. Cut the tape for the leg drawcords (cut two) 32 ± 1 inches long for all sizes.						
2.	Replacement of defective components.						
	During the spreading, cutting, and manufacturing process components having material defects or damages						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of defective components. (cont'd) that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Marking. a. Mark, ticket, or bundle all component parts of the trousers except those parts cut from ends to ensure correct size, proper assembly, and uniform shade throughout the trousers. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of the adhesive on the material after removal of the tickets. c. The use of an ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the trousers.						
4.	Make slide fastener thong. a. Fold tape in half lengthwise with the raw edges turned in and stitch 1/16 to 1/8 inch from the turned under edge. or	301	EFp-2	10-14	60	60	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make slide fastener thong. (cont'd)						
	b. Fold under side raw edges with edges abutted or overlapped and double-stitch the length of the tape with a 1/4 inch gage.	406	EFh-1	10-14	60	40	
	c. The thong shall finish 1/4 ± 1/8 inch wide.						
5.	Attach thong to slide fastener pull tab.						
	a. Cut the thong 5-1/2 ± 1/2 inches in length.						
	b. Thread one end of thong through end of slide fastener pull tab and with ends even, bartack together with two vertical bartacks 1/2 to 3/4 inch apart, with the end of the top bartack 1/4 to 1/2 inch from the end of the slide fastener pull.	Bartack		28 per bartack	40	40	
6.	Labels.						
	Sew labels on the trousers in the locations specified below. Stitching shall not be through writing on the label.						
	a. Identification label. The identification label shall be placed on the inside of right hip pocket (as worn) so that on the finished trousers, the label shall face the wearer (see operation 15.b). The label shall not be caught in the pocket closing stitching, and the label shall be centered on the pocket. The label shall be stitched on all four sides with the stitching not more than 3/16 inch from the edge of the label.	301	LSbj-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Labels. (cont'd)						
	b. Size label. The size label shall be placed on the inside of the trousers, to the left of the seat seam. The top edge of the size label shall be caught in the bottom row of waistband facing stitching (see operation 21.d). The label may be tacked into position prior to the waistband stitching operation.	301	LSbj-1	10-14	60	60	
	c. Instruction label. The instruction label (when applicable) shall be placed on the inside of the trousers below the identification label (see operation 15.b). The top edge of the instruction label may be caught in the bottom edge stitching of the identification label. The label shall be stitched on all four sides with the stitching not more than 3/16 inch from the edge of the label.	301	LSbj-1	10-14	60	60	
	d. Combination identification and instruction label. The combination identification and instruction label shall be attached as specified in 6.a. above.	301	LSbj-1	10-14	60	60	
7.	Make waist adjustment straps.						
	a. Turn under raw edge of one end of waist adjustment strap 1/4 ± 1/16 inch and then turn the same end in 1 to 1-1/4 inches more. Stitch with a bartack, box stitch or tack 1/16 to 1/8 inch from edge. An automatic line tack may be used.	301 or bartack or 301 line tack		10-12 28 per bartack 28 per tack	60 40 60	60 40 60	
	b. Thread unfinished end of strap over the first bar from lip and pull turned under end of tape toward lip.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make belt loops. Finished appearance. Make seven belt loops. The belt loops shall measure 3/8 to 1/2 inch wide and 2 ± 1/4 inches long.						
	a. Fold under side raw edges, with edges abutted, and double-stitch the length of the loops. The stitching shall be 3/16 to 5/16 inch gage, using a cover stitch on the underside.	406	EFh-1	6-10	60	40	
	or						
	b. Fold loops in half lengthwise with the raw edges turned in and stitch 1/16 to 1/8 inch from each edge.	301	EFp-2	10-14	60	60	
	or						
	c. Fold stripping with both edges turned in and with the turned in edges abutted at center stitch with a covering stitch.	105	EFae-1	12-16	40	40	
*9.	Make hip pocket flaps. Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat, without twists, puckers, pleats, or raw edges.						
	a. Fold pocket flap in half, with fabric face to face, and raw edges even and stitch sides leaving the top raw edges open.	301	SSe-2(a)	10-14	60	60	
	b. Turn flap, work out edges and corners. Stitch 1/4 ± 1/16 inch from the side and bottom edges.	301	SSe-2(b)	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*9.	Make hip pocket flaps. (cont'd)						
	c. Overedge stitch the top raw edges of each pocket flap together.	503 or 504	EFd-1	6-10	40	40	
	d. Position loop portion of fastener tape to pocket flap as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
*10.	Make cargo pockets and flaps.						
	a. Fold cargo pocket flap in half, with fabric face to face, and raw edges even and stitch sides leaving the top raw edges open. Turn flap, work out edges and corners.	301	SSa-1	10-14	60	60	
	b. Fold the cargo pocket pleats at marks indicated on pattern. Stitch along the two folds 1/8 ± 1/16 inch from the edge. The pleats shall finish facing the back of the trousers.	301	OSf-1	10-14	60	60	
	c. Hem front edge of pocket as indicated on pattern. Stitch 1/16 to 1/8 inch from folded edge. The hem shall finish 1-5/8 ± 1/8 inches wide.	301	EFb-1	10-14	60	60	
	d. Position hook portion of fastener tape on pocket as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
	e. Position face of cargo pocket flap on back of cargo pocket and with top raw edges even, overedge stitch the pocket and pocket flap together.	503 or 504	EFd-1	6-10	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*10.	Make cargo pockets and flaps. (cont'd)						
	f. Turn flap over pocket and stitch flap to pocket 1/4 ± 1/16 inch from the side and bottom edges.	301	LSd-1	10-14	60	60	
	g. The remaining raw edges of pockets may be prehemmed prior to attachment to trousers. Turn edges under 3/8 inch and stitch 1/16 to 1/8 inch from the edge.	301	EFa-1	8-10	60	60	
*11.	Make calf pockets and flaps.						
	a. Fold calf pocket flap in half, with fabric face to face, and raw edges even and stitch sides leaving the top raw edges open. Turn flap, work out edges and corners.	301	SSa-1	10-14	60	60	
	b. Position face of calf pocket flap on back of calf pocket, with top raw edges even and side edges of pocket turned in, overedge stitch the pocket and pocket flap together.	503 or 504	EFd-1	6-10	60	60	
	c. Position hook portion of fastener tape to back of pocket as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape through pocket only.	301	LSbj-1	10-14	60	60	
	d. Turn flap over pocket and stitch flap to pocket 1/4 ± 1/16 inch from the side and bottom edges.	301	LSd-1	10-14	60	60	
	e. The remaining raw edges of pocket may be prehemmed prior to attachment to trousers. Fold up bottom of pocket as indicated by marks on pattern. Turn under side and bottom edges 3/8 inch and stitch 1/16 to 1/8 inch from the edge catching bottom fold in stitching.	301	EFa-1	8-10	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
12.	Make left fly.						
	a. Turn under the raw edges of left fly and stitch 1/16 to 1/8 inch from turned edge.	301	EFa-1	8-10	60	60	
	or						
	b. Overedge the raw edges of left fly.	503 or 504	SSa-1	6-10	40	40	
	c. Position the left half of the slide fastener with the bottom of the chain no more than 1/4 inch above the fly notch and so that in the finished trousers, the edge of the chain is 1/2 ± 1/16 inch from the front edge of the fly and the top end of the chain is 2-1/4 ± 1/16 inches from the top of trousers.	301	SSa-2 and	10-14	60	60	
		301	LSd-1	10-14	60	60	
	d. Turn under the top raw edge of the slide fastener tape and stitch the tape to the fly with two rows of stitching. Place the first row of stitching 1/8 ± 1/16 inch from the chain. Place the second row 1/4 ± 1/16 inch from the first row. Place a horizontal bartack across the top of the tape extension.	301 Bartack	LSbj-1	10-14 28 per bartack	60 40	60 40	
13.	Make right fly.						
	a. Place the right fly lining to the right fly, face to face and stitch 1/8 ± 1/16 inch. Turn out and edge stitch 1/16 to 1/8 inch from the edge. The lining shall not be exposed along the front edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	60 60 60	60 40 60	
	b. Overedge the back edge of fly lining and fly together.	503 or 504	SSa-1	6-10	40	40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make right fly. (cont'd)						
	c. Position the right half of the slide fastener 1/8 inch in from the back edge of the right fly with the button end of chain no more than 1/4 inch above the fly notch. With the top end of the tape extension turned to one side (for catching in seam in a subsequent operation), stitch fastener tape to fly, with two rows of stitching. Place the first row of stitching 1/4 ± 1/16 inch from back edge of tape. Place a second row of stitching 1/4 ± 1/16 inch from the first row.	301	SSa-1	10-14	60	60	
14.	Attach flies to fronts.						
	a. Position left fly to left front, face to face, and stitch across top and down front to notch, with notches matching. Trim corner.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	60 60	60 40	
	b. Turn left fly to inside of trousers and edge stitch 1/16 to 1/8 inch from folded edge.	301	SSe-2(b)	10-14	60	60	
	c. Stitch right fly to right front matching notches and catching fastener tape in the seam. Turn the seam towards the side of trousers and raise stitch through all plies from top of trousers to base of fly, 1/16 to 1/8 inch from the edge.	301 or 401 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	60 60 60	60 40 60	
15.	Make hip pockets and attach identification and instruction labels.						
	Finished appearance. The hip pockets shall be uniform in width and depth. Ends of the openings where						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	the cord facings are turned in shall be neatly finished without raw edges or pleats. The right and left pockets shall be in alignment.						
	a. Position pocket bearer to pocket according to the line on the pattern, with the lower edge turned in. Stitch 1/16 to 1/8 inch from the folded edge.	301	LSd-1	10-14	60	60	
	NOTE: When bearer edge is cut on the selvage, the edge need not be overedged nor turned in.						
	b. Place the identification label and the instruction label on the right pocket so that on the finished trousers the label will face the wearer (see operations 6.a. and 6.c.). The label shall be positioned below the pocket opening. Stitch on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14	60	60	
	c. Position hip pocket flap bottom raw edges on mark indicated on the pattern for pocket opening on trouser back. Position hip pocket on underside of trouser back matching pocket opening marks. Stitch through all plies 1/4 to 3/8 inch from raw edges of flap.	301	LSq-2(a)	10-14	60	60	
	d. Position facing parallel to flap raw edges on outside of trouser and stitch 3/16 to 1/4 inch from edge on flap.	301	SSbe-2(a)	10-14	60	60	
	e. Cut opening between rows of stitching and tongue notch ends.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	f. Turn pocket facing piece through opening and edge stitch 1/16 to 1/8 inch from seam through trouser forming a cord 3/16 to 1/4 inch wide.	301	SSbe-2(b)	10-14	60	60	
	g. Turn in the bottom raw edge of the facing piece and stitch to pocket 1/16 to 1/8 inch from the edge.	301	LSd-1	10-14	60	60	
	NOTE: When bottom edge is cut on the selvage, the edge need not be overedged nor turned in.						
	h. Position hook fastener tape to trouser back (on outside of trousers), as indicated on pattern, and stitch through trousers and one layer of pocket. Do not stitch through both layers of pocket. Stitch on all four sides of hook fastener tape 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
	i. Seam side raw edges of pocket, turn and edge stitch 3/16 to 1/4 inch from the edge. Edge stitching may continue across the bottom folded edge. The raw edges of the pocket shall be on the inside.	301 301	SSe-2 and OSf-1	10-14 10-14	60 60	60 60	
	j. Turn down flap over pocket opening and raise stitch 1/16 to 1/8 inch through the trousers, flap seam allowance, pocket bearer and pocket. Continue the stitching across the openings of the ends, catching the turned in tongues. Place a vertical bartack at each end of pocket opening. or	301 Bartack	LSq-2(b)	10-14 28 per bartack	60 40	60 40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	Repeat operation 15.c and:						
	k. Cut pocket opening and tongue notch ends.						
	l. Position hip pocket bearer to pocket according to line on pattern with raw edge turned under and stitch 1/16 to 1/8 inch from folded edge.	301	LSd-1	10-14	60	60	
	m. Fold facing in half, position raw edges to the end of pocket and safety stitch together.	515 or 516 or 519	SSa-2 SSa-2 SSa-2	10-14 10-14 10-14	40 (Chain stitching) 40 (overedge stitching)	40 40	
	n. Turn under the lower edge of pocket opening and stitch 1/16 to 1/8 inch from folded edge through facing forming a cord 3/16 to 1/4 inch wide. The raw edges of seams joining facing cord to pocket shall finish between outside of the pocket and trousers.	301	LSd-1	10-14	60	60	
	o. Form pocket by safety-stitching the sides together. Finish flap by repeating operation 15.j.	515 or 516 or 519	SSa-2 SSa-2 SSa-2	10-14 10-14 10-14	40 (Chain stitching) 40 (overedge stitching)	40 40	
	or						
	p. Repeat operations 15.k through o. and:						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach identification and instruction labels. (cont'd)						
	q. Position pocket to underside of trousers according to pocket opening marks; turn under the top edge of pocket opening, insert top of flap 1/4 to 3/8 inch and raise stitch through trousers 1/16 to 1/8 inch from fold catching the raw edges of the flap, bearer, and pocket opening. Continue across the opening of the ends catching the turned in tongues and tacking pocket.	301	LSd-1	10-14	60	60	
	r. Operations c. through f. may be performed by an automatic stitching machine which sets the flap, stitches, cuts, and turns piped edges in one operation. Facing edge shall be turned under and stitched to pocket as in operation 10.d. When this method is used, the ends of the pocket opening shall be securely tacked, and the top corded edge shall finish under the flap, or the top cord may be deleted when an automatic stitching machine is used. Raise stitching of lower edge should be through the trouser back and piping piece only.	101 or 301		10-14	60	60	
	s. Raise stitch flap through trouser back, flap seam allowance, piping, pocket and bearer 1/16 to 1/8 inch from seam.	301		10-14	60	60	
	t. Close sides of pocket by safety stitching the sides together.	515 or 516 or 519	SSa-1 SSa-1 SSa-1	10-14 10-14 10-14	60 (Chain stitching) 40 (overedge stitching)	40 40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make and stitch side hanging pockets.						
	Finished appearance. The pocket openings shall be uniform in appearance and the edges shall finish smooth and flat without distortion. The pocket openings shall finish not less than 6 inches.						
	a. Overedge stitch the front raw edges of bearers.	502 or 503 or 504	EFd-1 EFd-1 EFd-1	10-14 10-14 10-14	40 40 40	40 40 40	
	b. Overedge stitch the back raw edges of facings.	502 or 503 or 504	EFd-1 EFd-1 EFd-1	10-14 10-14 10-14	40 40 40	40 40 40	
	or						
	c. When the back edge of the facings are selvaged, they need not be overedged.						
	or						
	d. In lieu of operations a. and b., the raw edges may be turned under and caught in the stitching when performing operations e. and f.						
	e. Position bearer on pocket, as indicated on pattern, and stitch bearer to pocket along front edges of bearer. Position hook portion of the fastener tape on bearer as indicated by marks on pattern. Stitch hook tape to bearer and pocket on all four sides 1/16 to 3/32 inch from edge of tape.	301 301 301	SSa-1 or LSd-1 LSbj-1	10-14 10-14 10-14	60 60 60	60 60 60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
16.	Make and stitch side hanging pockets. (cont'd)						
	f. Position facing on pocket with ends of facing equidistant from notches and stitch facing to pocket along back edge of facing. Position loop portion of the fastener tape on facing as indicated by marks on pattern. Stitch loop tape to facing and pocket on all four sides 1/16 to 3/32 inch from edge of tape.	301	SSa-1 or	10-14	60	60	
		301	LSd-1	10-14	60	60	
		301	LSbj-1	10-14	60	60	
	g. Fold pocket in half, seam and overedge stitch bottom edges.	515 or	SSa-2	10-14	60	40	
		516 or	SSa-2	10-14	(Chain stitching)		
		519	SSa-2	10-14	40 (overedge stitching)	40	
	or						
	h. Fold pocket in half, stitch, turn and edge stitch bottom edges, 1/8 to 3/16 inch from turned edge.	301 or	SSe-2(a)	10-14	60	60	
		401 and	SSe-2(a)	10-14	60	40	
		301	SSe-2(b)	10-14	60	60	
	and						
	i. Position front of pocket to front of trousers, matching notches and stitch pocket to front; turn pocket to inside and double stitch edge or single stitch edge 3/16 to 1/4 inch from edge, from top of trousers to edge of outseam.	301 or	SSe-1	10-14	60	60	
		401 and	SSe-1	10-14	60	40	
		301	SSe-3(b) or	10-14	60	60	
		301	SSe-2(b)	10-14	60	60	
	j. Position front on bearer. Stitch above and below pocket opening through trouser and bearer with one row of stitching 1/16 to 3/32 inch from the edge.	301	LSd-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Join outseams. Finished appearance. The outseams shall be carefully joined with notches matching, free of twists, puckers, pleats or raw edges. The seams shall start and finish evenly. Pocket openings shall not show excessive fullness or pleats in the joining of the seams, and shall not be caught in the seam stitching.						
	a. Form knee pleat as indicated on pattern. Join outseams with a double-lapped and double-stitched seam, with the fronts of trousers lapping the backs. The outside folds of the pleat shall face toward the bottom of trousers.	301 or 401	LSc-2 LSc-2	10-14 10-14	60 60	60 40	
	b. The pleat may be held in place by a holding stitch no more than 1 inch from side raw edge, stitched along pleat fold. or	301 or 401	OSe-1 OSe-1	10-14 10-14	60 60	60 40	
	c. Pleat may be held in place by a bartack, but the bartack must be buried in the leg seams and not be visible from the front view of the trousers.	Bartack		28 per bartack	40	40	
*18.	Attach cargo pockets and flaps. Finished appearance. The pleats of the cargo pockets shall finish toward the back of the trousers. Pockets shall be uniformly stitched and properly positioned.						
	a. Mark the position of the cargo pockets as indicated on pattern. Position loop portion of the fastener	301	LSbj-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*18.	Attach cargo pockets and flaps. (cont'd)						
	tape to the trouser front as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.						
	b. Turn in seam allowance of the pocket. Position pocket as marked and with fastener tapes aligned, stitch to trousers with one row of stitching 3/16 to 1/4 inch from edge.	301	LSd-1	10-14	60	60	
	c. Bartack top and bottom of pocket opening with horizontal bartacks in line with ends of fastener tape through pocket and trousers.	Bartack		28 per bartack	60	60	
*19.	Attach calf pockets and flaps.						
	Finished appearance. The pockets shall be uniformly stitched and properly positioned with the top edge of the pocket covering the fastener tape.						
	a. Mark the position of the calf pockets as indicated on pattern. Position loop portion of the fastener tape to the trouser leg as indicated by marks on pattern. Stitch on all four sides 1/16 to 3/32 inch from edge of tape.	301	LSbj-1	10-14	60	60	
	b. Fold up bottom of pockets as indicated by marks on pattern. Turn in raw edges of pockets 3/8 inch, if not prehemmed. Stitch pocket to trousers, positioned as marked and fastener tapes aligned, with one row of stitching 3/16 to 1/4 inch from edge. Stitching shall	301	LSd-1	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*19.	Attach calf pockets and flaps. (cont'd) superimpose prehemming stitching when this option is selected. The fold at the bottom of the calf pocket shall finish 1 ± 1/16 inch in width.						
20.	Join seat seam. Join the seat seam with a double-lapped, double-stitched seam. The seat seam may lap in either direction.	401	LSc-2	10-14	60	60	
21.	Attach waistband lining and belt loops. Finished appearance. The waistband lining shall finish flat and smooth without twists, puckers, pleats or raw edges. The top edges of the side hanging pockets shall extend into the waistband area and shall be caught under the bottom stitching of the waistband lining. The finished waistband lining shall measure 1-5/8 ± 1/8 inches wide. a. Position the belt loops as follows: (1) One centered on left front, midway between front edge and outseam. (2) One centered on right front, midway between front edge of fly and outseam. (3) One adjacent to each outseam on back. (4) One adjacent to seat seam on left back. (5) One each midway between belt loops at outseam and seat seam.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	b. Position waistband lining to waistband. Waistband lining shall extend 1-1/4 ± 1/16 inches from left front edge of trousers. Stitch lining to top of trousers, 3/8 ± 1/16 inch from edge, catching one end of belt loops and top edges of hip hanging pockets (for grown on waistband construction only) in the stitching. The belt loops may also be attached separately as in operation 21.f.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	60 60	60 40	
	c. Turn waistband to inside of trousers and work out top edges. Turn under raw end of waistband lining at right front edge and stitch 1/16 to 1/8 inch from top edge continuing down right front waistband. Bottom raw edge on right ends shall be turned under and caught in stitching. Belt loops shall not be folded over the top of trousers and caught in edge stitching.	301 or 401 and 301	SSe-2(b) SSe-2(b) SSb-1	10-14 10-14 10-14	60 60 60	60 40 60	
	d. Turn under remaining bottom raw edges of waistband lining and stitch 1/16 to 1/8 inch from edge, catching hip pocket and size label at left of center seam. The back edge of lining shall not be caught in the stitching. The label may be tacked to the turned-in bottom of the lining prior to waistband stitching.	301 or 401	LSd-1 LSb-1	10-14 10-14	60 60	60 40	
	or						
	e. Waistband lining operations indicated in operations 21.c and 21.d may be combined in one operation.	301 or 401	LSk-2 LSk-2	10-14 10-14	60 60	60 40	
	f. As an alternate, the belt loops may be attached after the waistband has been completed. Position the belt loops as indicated on pattern and with the ends	Bartack		28 per bartack	40	40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	turned in, bartack top and bottom ends of loops to trousers. The belt loops shall finish 2 ± 1/4 inches between bartacks. When belt loops are inserted into the waistband stitching, the loops shall be bartacked at top and bottom with the bottom raw end turned in. Bottom bartack shall not be through size label at back of trousers.						
	or						
	Finished appearance. The waistband and waistband lining shall finish flat and smooth without twists, puckers, pleats, or raw edges. The top edges of the side hanging pockets shall extend into the waistband area and shall be caught in the two rows of bottom stitching of the waistband. The lining shall measure 1-5/8 ± 1/8 inches wide.						
	g. Position waistband lining on face side of waistband and stitch 3/8 ± 1/16 inch from edges. Turn and edge stitch 1/16 to 1/8 inch from edge.	301 or 401	SSe-2	10-14	60 60	60 40	
	or						
	h. Fold in edges of waistband and waistband lining 3/8 ± 1/16 inch and edge stitch 1/16 to 1/8 inch from edge.	301 or 401	SSc-1	10-14	60 60	60 40	
	i. Position waistband on top of trousers, face to face, and stitch 3/8 ± 1/16 inch from edge.	301 or 401	SSa-1	10-14	60 60	60 40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach waistband lining and belt loops. (cont'd)						
	j. Turn waistband to finished position, turn bottom edge of waistband lining and stitch through trouser waistband and waistband lining with a double row of stitching 3/16 inch gage, catching label at center back.	301 or 401	Finished seam is LSco-4	10-14	60 60	60 40	
	or						
	k. Operations 21.g, 21.h, 21.i and 21.j, may be performed in one operation using a folder, and a double row of stitching 3/16 inch gage to attach waistband and lining to trouser top.	301 or 401	LSbc-3	10-14	60 60	60 40	
	l. Turn front end of right waistband inward and stitch along tucked in edge.						
22.	Finish left fly.						
	Stitch back edge of left front of trousers through front from top of trousers to bottom of crotch seam with stitching 1-3/4 to 2 inches from front edge and tapering to front edge at base of fly opening.	301	SSv-1	10-14	60	60	
23.	Join crotch seam.						
	Position left front over right front along crotch seam with left front seam allowance turned under. Seam with two rows of stitching. The stitching shall terminate 2-3/4 to 3 inches from inseam.	301	LSb-2	10-14	60	60	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Join inseams.						
	a. Form knee pleats, as indicated by notches on pattern and join inseams in one continuous operation with a double-lapped and double-stitched seam with the fronts lapping the backs. The outside fold of pleats shall be toward the bottom of the trousers, and the crotch and seat seams shall not be staggered more than 5/8 inch (measurement taken from center of seams).	301 or 401	LSc-2 LSc-2	10-14 10-14	60 60	60 40	
	b. Pleats may be held in place by a holding stitch no more than 1 inch from side raw edge stitched along pleat folds.	301 or 401	OSe-1 OSe-1	10-14 10-14	60 60	60 40	
	or						
	c. Pleats may be held in place by a bartack but the bartack must be buried in the leg seams and not be visible from the front view of the trousers.	Bartack		28 per bartack	40	40	
25.	Attach two waist adjustment straps to waistband.						
	a. Thread attachment strap through second bar from lip end; fold back one end over opposite end 1/4 to 3/8 inch.						
	b. Position folded-in end on center of waistband, 5/8 to 3/4 inch in front of outseam with buckle lip toward back of trousers. Double bartack (vertically) strap to trousers, 1/16 to 1/8 inch from back edge and 1/8 to 3/16 inch apart. Bartack shall not be through side seam.	Bartack		28 per bartack	40	40	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25.	Attach two waist adjustment straps to waistband. (cont'd)						
	c. Thread free end of waist adjustment strap under back belt loops, extend full length, turn under raw edge 1/4 to 3/8 inch and double bartack (vertically) strap to trousers, 1/16 to 1/8 inch from folded edge and 1/8 to 3/16 inch apart.	Bartack		28 per bartack	40	40	
*26.	Make buttonhole for leg hem drawcords.						
*	a. Make two buttonholes to finish in center of underside of trouser hem through reinforcement piece at front of each trouser leg, as indicated on pattern. Position the eyelet end of buttonhole toward front of trouser. Reinforcement piece shall be of sufficient width and length to reinforce drawcord outlets. The reinforcement pieces may be prestitched into position prior to making drawcord outlets.	Buttonhole		52-56 per buttonhole including tack	60	40	
	or						
	b. Make two sewn eyelets through reinforcement, positioned as indicated for the eyelet end of the buttonhole.	Eyelet		19-24 per eyelet	60	40	
	or						
	c. Make two 1/2 to 5/8 inch, straight-cut buttonholes tacked at both ends, through reinforcement and positioned as indicated on pattern.	304		52-56 per buttonhole including tack	60	40	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*26.	Make buttonhole for leg hem drawcords. (cont'd)						
*	d. Thread leg drawcord through buttonholes or eyelets with tape crossed between outlets and extending around the bottom of each leg, and knot ends.						
*	e. Bartack the leg drawcord through the underside of leg bottoms at center of back part; or bartack the tape through the finished hem.	Bartack		28 per bartack	40	40	
27.	Hem leg bottoms.						
	Turn up leg bottoms as indicated on pattern. Turn in the raw edge 1/4 to 3/8 inch and single stitch 1/16 to 1/8 inch from the edge. The hem shall finish 1 ± 1/4 inch wide.	301	EFb-1	10-14	60	60	
28.	Make waistband buttonhole.						
	Mark and make horizontal buttonhole through all plies at the waist of left front with the inside edge of the eyelet 3/8 to 1/2 inch from the front edge and centered horizontally on waistband lining. The buttonhole purling shall finish on the outside of the trousers.	Buttonhole		52-56 per buttonhole including tack	60	40	
29.	Mark or gage and sew on button.						
	Sew waist button on right front to correspond with eyelet end of buttonhole in left front.	101 or 301		14-16 per button 14-16 per button	60		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
30.	Clean trousers. a. Trim all ends of stitching to 1/4 inch maximum length throughout (inside and outside) and remove loose threads from the trousers. b. Remove all spots, stains, and visible shade or size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 3.9 Finished measurements. The finished measurements shall be as shown in table II.

TABLE II. Finished measurements (inches)

Size	1/2 Waist 1/	Inseam 2/	Outseam 3/	Bottom 4/
X-Small - Short	13-3/4	31-3/4	42-1/4	17
X-Small - Regular	13-3/4	33-3/4	44-3/4	17
X-Small - Long	13-3/4	35-3/4	47-1/4	17
Small - Short	15-3/4	31-3/4	42-1/4	17
Small - Regular	15-3/4	33-3/4	44-3/4	17
Small - Long	15-3/4	35-3/4	47-1/4	17
Medium - Short	17-3/4	31-3/4	42-1/4	17-3/4
Medium - Regular	17-3/4	33-3/4	44-3/4	17-3/4
Medium - Long	17-3/4	35-3/4	47-1/4	17-3/4
Large - Short	19-3/4	31-3/4	42-1/4	17-3/4
Large - Regular	19-3/4	33-3/4	44-3/4	17-3/4
Large - Long	19-3/4	35-3/4	47-1/4	17-3/4
X-Large - Short	21-3/4	31-3/4	42-1/4	18-1/2
X-Large - Regular	21-3/4	33-3/4	44-3/4	18-1/2
X-Large - Long	21-3/4	35-3/4	47-1/4	18-1/2
Tolerance	± 1/2	± 3/4	± 3/4	± 1/2

1/ Measured along center of waistband from folded edge to folded edge.

2/ Measure inseam of trousers from crotch seam to bottom edge of trouser leg.

3/ Measure from top edge of waist to bottom of leg along outseam.

4/ Measure across bottom of leg. Multiple by two.

3.10 Workmanship. The end item shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to the requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for visual and dimensional defects as specified in MIL-STD-1488.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for utility trousers (U) visual defects in accordance with the provisions of MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

4.4.3 End item dimensional examination. The end items shall be examined for the dimensional defects in accordance with the provisions of MIL-STD-1488.

4.4.4 Packaging examination. The fully packaged end items shall be examined in accordance with the provisions of MIL-STD-1488.

* 4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each pair of trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23-1/2 inches. Before folding the regular and long trousers to the required length, the leg bottoms shall first be folded over approximately 4 inches. For the larger sizes, it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Five folded trousers, of one size only, shall be neatly stacked in a bundle with waistbands alternated and the bundle securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial. Trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A packing. Thirty pairs of trousers of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Trousers bundled as specified in 5.1.1 shall be packed flat, six in depth, within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping for type II, class F loads.

* 5.2.2 Level B packing. Thirty pairs of trousers of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Trousers bundled as specified in 5.1.1, shall be packed flat, six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Trousers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), trousers, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are for wear by aviator crewmen of the Department of Defense.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article sample is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 International standardization agreement. Certain provisions of this document are the subject of international standardization agreement as cited in NATO, STANAG 2333. When amendment, revision, or cancellation of this document is proposed, which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

* 6.5 Suggested resin. A suggested resin for dipping ends of drawcords (see 3.3.3.1) and slide fastener thongs (see 3.2.6.2) is "No Fray No. 64", Champion Packaged Products, Inc., 4939 South Austin Avenue, Chicago, IL 60638.

6.6 Point count system. This specification contains the requirements for a point count system for sampling and inspection of the end item. For the visual examination, point values of 1, 2 or 3 are assigned to the listed defects depending on severity. The higher point values are assigned to those defects having a more detrimental effect on the appearance or serviceability of the items.

6.7 Subject term (key word) listing.

Aviator
Crewchief
Flight clothing

6.8 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8415-0799)

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Air Force - 45
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.

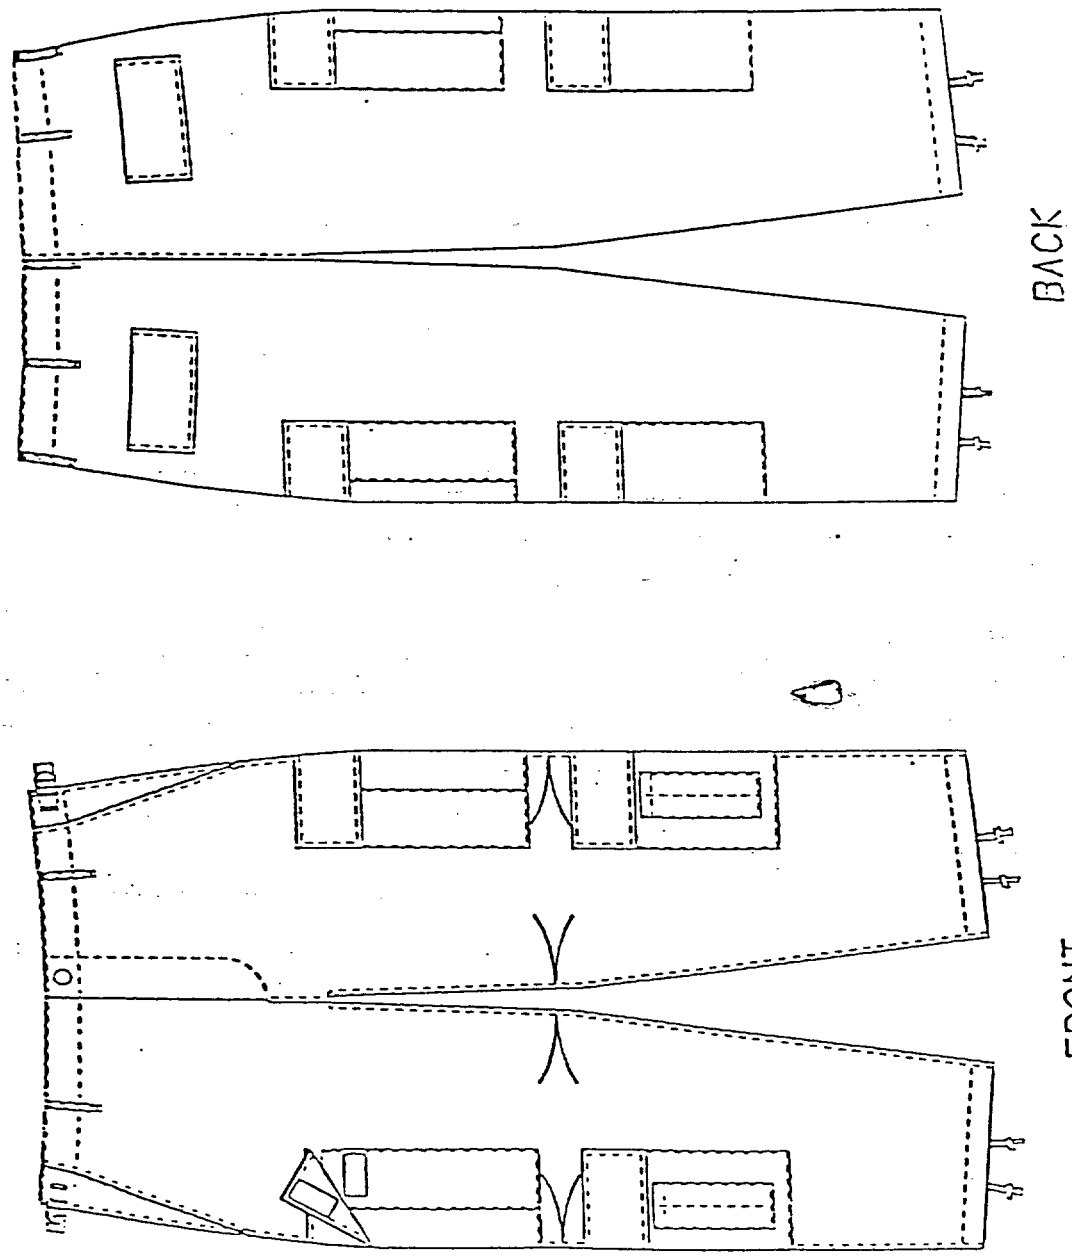


FIGURE 1. TROUSERS, AIRCREW, COMBAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:50Z
Check the source to verify that this is the current version before use.