MIL-F-45289B
26 March 1976
SUPERSEDING
MIL-F-45289A(EL)
28 May 1975

MILITARY SPECIFICATION

FILTER, INFRARED INTERFERENCE - TYPE (PINK) FOR SEARCHLIGHT, INFRARED, AN/VSS-3 28 VOLT, 50-60 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of infrared interference filter (pink), (See 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallet, Materials Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	Strapping, Steel, Flat and Seals
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock Corner
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-P-291	Paperboard, Wrapping and Cushioning
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing)
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

FSC 5855

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	Marking of Electronic Items
MIL-M-13508	Mirror, Front Surfaced Aluminized: for Optical Elements
MIL-B-43014	Boxes: Water Resistant Paperboard, Folding, Set-Up, and Metal-Stayed
MIL-S-55343	Searchlight, Infrared 28 Volt, 50-60 Ampere AN/VSS-3
MIL-R-55344	Radiation Source, Infrared, for Searchlight, Infrared, AN/VSS-3

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-252	Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and other Devices
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

SC-D-647000	Filter Assembly, Infrared, Interference Type (Pink)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The infrared filter interference type (pink), hereinafter known as the filter, shall consist of a filter and a sleeve with a mutual bond.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

3.2 Construction. The filter shall be constructed in accordance with Drawing SC-D-647000 and as specified herein.

3.3 First article. When specified in the contract or purchase order the contractor shall furnish first article filters in accordance with 4.3.

3.4 Parts and materials. Parts and materials shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification and shall conform to MIL-P-11268.

3.5 Performance characteristics.

3.5.1 Interference coating. The filter interference coating shall meet the adherence requirements of MIL-M-13508 and the requirements specified herein.

3.5.2 Cleanability. The transmission coating shall not be damaged nor the performance degraded when cleaned with cotton containing detergents, acetone, ethyl alcohol, or distilled water and dried.

3.5.3 Spectral transmission. The spectral transmission shall be in accordance with Figures 1, 2 and 3.

3.5.4 Angular visual security. The angular visual security of the filter shall not exceed 2 1/2° from the axis of the cylindrical filter when installed in a 1 KW searchlight conforming to MIL-S-55343 and operating in the compact infrared mode.

3.5.5 Light tightness. No visible white light through the filter (except the red glow) (see 6.3) shall be detectable to the human eye at any distance when filtering energy from a standard 100 watt incandescent lamp.

3.5.6 Mechanical shock. The filter shall not be damaged (see 6.3) by mechanical shocks of 70 g's (see 6.3).

3.5.7 Vibration. The filter shall not be damaged by vibration throughout a frequency range of 15 to 120 hertz (Hz) at a value of 2.5 g's, plus or minus 0.5 g.

3.5.8 Temperature shock. The filter shall not be damaged nor the performance impaired when exposed to temperature shock from minus 54°C to plus 288°C.

3.5.9 Humidity. The filter shall not be damaged nor the performance impaired when exposed to a relative humidity of 90 percent, ± 5 percent at a temperature of plus 40°C.

3.5.10 Life. The filter shall not be damaged nor the transmission vary from an initial spectral transmission measurement (see 3.5.3) by more than 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

percent when subjected to a life environment of 48 hours while transmitting the energy from a Radiation Source Infrared (RSI) conforming to MIL-R-55344.

3.6 Marking. The filter and all components shall be marked and identified as specified on the applicable drawings (see 3.2).

3.7 Workmanship. Unless otherwise specified workmanship shall conform to Requirement 9 of MIL-STD-454.

3.8 Government-loaned property. When specified (see 6.2) the following property in the quantities indicated will be loaned by the Government.

Item No.	Description	Identification	Quantity
1	1 kW Searchlight	MIL-S-55343	1

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Parts and materials inspection. The supplier is responsible for insuring that parts and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards specified herein.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article (see 4.3)

b. Quality conformance inspection (see 4.5)

c. Inspection for preparation for delivery (see 4.7)

4.3 First article. Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor (see 6.2).

4.3.1 Inprocess inspection prescribed by a specification or drawing. Each lot of components and subassemblies shall have all parameters examined for defects in conformance with the inspection plan in the applicable specification or on the drawing. In addition, the following inspection plans shall be applicable as listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

TABLE I Inspection

Inspection	Requirement paragraph	Inspection document
Marking	3.6	MIL-M-13231
Workmanship	3.7	MIL-STD-252
Interference coating	3.5.1	MIL-M-13508 (except 100% inspection is required)

4.3.2 Inprocess inspection not prescribed by a specification or drawing. Each lot of components and subassemblies not prescribed by a specification or a drawing with a specific inspection plan shall have all parameters examined for defects in accordance with the sampling plan tables of MIL-STD-105 with major defects (see 4.3.2.1) having an AQL of 4 percent defective combined. Inspection level II shall be applicable to both sampling plans.

4.3.2.1 Classification of defects for inprocess inspection not prescribed by a specification or drawing.

Major
- 101 Linear or diametral tolerances of 0.002 inch or less.
- 102 Angular dimensions having a tolerance of 15 minutes of arc or less.
- 103 Machine finishes of 32 micro-inches RMS or finer.
- 104 Tolerances of position or form 0.002 inch or less.

Minor
Defects not listed as major shall be classified as minor.

4.3.3 Examination. Each filter shall be examined for defects in accordance with Table II. One or more defects shall be cause for rejection.

TABLE II Inspection

Characteristic	Requirement paragraph	Inspection criteria
Any part or component missing	3.2	MIL-STD-252
Markings not as specified or illegible	3.6	MIL-M-13231
Workmanship not as specified	3.7	MIL-STD-252

4.3.4 Tests. Upon successful completion of the examination specified in 4.3.3, the first article filter shall be subjected to the tests in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

Tests shall be conducted in the order listed. Failure of any test shall be cause for rejection.

4.3.5 First article failure criteria. Rejection of any filter during examination or test (4.3.4) shall be considered first article failure.

TABLE III Inspection

Inspection	Requirement paragraph	Test paragraph
Interference coating	3.5.1	4.6.1
Cleanability	3.5.2	4.6.2
Spectral transmission	3.5.3	4.6.3
Angular visual security	3.5.4	4.6.4
Light tightness	3.5.5	4.6.5
Mechanical shock	3.5.6	4.6.6
Vibration	3.5.7	4.6.7
Temperature shock	3.5.8	4.6.8
Humidity	3.5.9	4.6.9
Life	3.5.10	4.6.10

4.4 Inspections covered by subsidiary documents. The filters shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order. See 4.3.1, Table I, and Table II.

4.5 Quality conformance inspection.

4.5.1 Examination. Each filter shall be examined as specified in Table II. Presence of one or more defects shall be cause for rejection of the filter.

4.5.2 Group A Inspection. Following the examination specified in 4.5.1, each filter shall be tested in accordance with Table IV in the order listed. Failure of any test shall be cause for rejection of that unit.

TABLE IV Group A Inspection

Inspection	Requirement paragraph	Test paragraph
Spectral Transmission	3.5.3	4.6.3
Light Tightness	3.5.5	4.6.5

4.5.3 Group B Inspection. Not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

4.5.4 Group C Inspection. Group C tests shall be conducted on filters selected from units which have passed the tests in 4.5.2. The filters shall be subjected to the inspections specified in Table V. Filters shall be selected in accordance with 4.5.4.1. Tests shall be performed in the order listed.

4.5.4.1 Sampling for Group C Inspection.

4.5.4.1.1 Subgroup 1. Three filters shall be selected from the first quality conformance inspection production lot. For subsequent Group C inspection, three filters shall be selected every month from the monthly specified quantity (see 6.2).

4.5.4.1.2 Subgroup 2. One filter shall be selected from the first quality conformance inspection production lot. For subsequent Group C inspection, one filter shall be selected every third month from the monthly specified quantity (see 6.2).

TABLE V Group C Inspection

Inspection	Requirement paragraph	Test paragraph
Subgroup 1		
Angular Visual Security	3.5.4	4.6.4
Mechanical Shock	3.5.6	4.6.6
Temperature Shock	3.5.8	4.6.8
Cleanability	3.5.2	4.6.2
Subgroup 2		
Vibration	3.5.7	4.6.7
Humidity	3.5.9	4.6.9
Life	3.5.10	4.6.10

4.5.5 Group C failures. Actions required relative to Group C failures shall be as specified in the contract or order (see 6.2).

4.5.6 Reinspection of Group C sample units. Unless otherwise specified, sample units which have been subjected to and passed Group C inspections, may be subjected to Tables I and II and Group A inspection and if they pass be accepted on contract or order.

4.6 Test methods. Unless otherwise specified in the individual test procedure, all tests shall be conducted at plus 23°C, plus or minus 3°C. Any inspection requiring the energy output of a MIL-R-55344 RSI shall have the RSI operating at 45 to 50 amperes. The RSI shall be positioned as required by the drawings (see 3.2).

Source: https://assist.dla.mil - Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

4.6.1 Interference coating. The filter interference coating shall be tested in accordance with MIL-M-13508. Failure to meet the requirements of MIL-M-13508 shall constitute failure of this test.

4.6.2 Cleanability. The filter shall be immersed for 15 minutes each in detergent, acetone, ethyl alcohol, and distilled water and cleaned with soft cotton. Visual evidence of deterioration of the coating shall constitute failure of this test.

4.6.3 Spectral transmission. The spectral transmission of the filtered energy from an RSI conforming to MIL-R-55344 shall be measured normal to the cylinder axis, at a 22° angle from the normal, and at a 47° 30 minute angle from the normal as displayed in the filter drawing (see 3.2). Rotate the filter around the cylinder axis 90°, 180°, and 270° repeating the 3 transmissions at each position. A filter having any of the 12 transmission measurements that fall within the left hand solid line (maximum transmission) and the dashed line of Figures 1, 2 and 3 when none of the measurements fall outside the solid lines shall be acceptable provided an Angular Visual Security Test (4.6.4) is successfully performed. Any filter having the 12 transmission measurements fall within the right hand solid line (minimum transmission) and the dashed line of Figure 1, 2, and 3 shall be acceptable. Failure of any of the 12 transmission measurements to fall within the solid lines of Figures 1, 2 and 3 shall constitute failure of this test.

4.6.4 Angular visual security. The filter shall be assembled into a searchlight conforming to MIL-S-55343 (see 3.8). The searchlight shall be mounted on a fixture having a controllable precise angular movement. This test shall be conducted at an outdoor range with an ambient light level not to exceed 2×10^{-3} foot lamberts. The searchlight shall be operated in the compact infrared mode with a 28-volt dc input for 30 minutes prior to performing this test. Three observers with 20/20 vision or vision corrected to 20/20 shall be dark adapted for not less than 30 minutes prior to determining the angular visual security. Starting at a distance of 1,000 yards from the filter and at 5° from each side of the optical center line, each observer shall move toward the optical axis along a line perpendicular to the optical center line of the beam. The point where the red glow of the filtered beam is first detected shall be recorded and the angular measurement of this point from the optical axis shall be computed. Any angular measurement exceeding 2 1/2° from the optical center line of the beam shall constitute failure of this test.

4.6.5 Light tightness. Install a standard 100 watt lamp inside the filter, in such a way that allows both ends of the filter to be sealed with a non-hardening substance (that can be easily cleaned with the detergents specified in 3.5.2) to entrap all the light energy and leave the filter free to rotate 360°. Tests shall be performed in a dark room having an ambient illumination no greater than 10^{-5} foot lamberts. Three observers with 20/20 vision or vision corrected to 20/20 shall be used for this test. The observers shall be dark adapted for at least 30 minutes in the same test area that the test will be performed. The filter with the cylinder axis perpendicular to the line of sight shall be viewed by each observer at 90° and at 45° each side of the 90° line as it is rotated 360° around the cylindrical axis. The observation of visible white light by any observer shall constitute failure of the tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

4.6.6 Mechanical shock. The filter shall be given a shock test in accordance with Procedure IV, Method 516.1 of MIL-STD-810. The amplitude (a) shall be 70 g's. The time duration (d) shall be 6 milliseconds. One shock shall be applied perpendicular to the cylinder axis and one shock shall be applied parallel to the cylinder axis. Following the shock the alignment relative to the filter and its sleeve shall be measured. A broken or cracked filter, loose parts, visual evidence of coating defects or misalignment between the filter and sleeve exceeding the drawing requirement shall constitute failure of the test.

4.6.7 Vibration. The filter shall be secured at both ends to a test fixture and mounted on a vibration table and vibrated as defined below.

a. Vibrate the filter with cylinder axis parallel to the line of sight with the frequency varying between 15 and 120 Hz at 2.5 g's, plus or minus 0.5 g. The frequency shall change logarithmically from 15 to 120 Hz and return to 15 Hz within 3.5 minutes. Vibration shall continue for not less than 17.5 minutes.

b. Vibrate the filter at 30 Hz, plus or minus 2 Hz for 15 minutes at 2.5 g's, plus or minus 0.5 g.

c. Repeat step (a) and (b) with the cylinder axis perpendicular to the line of sight.

Any evidence of damage shall constitute failure of this test.

4.6.8 Temperature shock. The filter shall be stored in a chamber at minus 54°C for 15 minutes. Within 2 minutes the filter shall be removed and placed in a chamber stabilized at plus 288°C. After 15 minutes the filter shall be removed and examined. Broken or cracked filters or loose parts shall constitute failure of this test.

4.6.9 Humidity. The filter shall be subjected to test condition B, Method 103 of MIL-STD-202. Any visual evidence of peeling of the coating or broken or cracked glass shall constitute failure of the test.

4.6.10 Life. The filter shall be subjected to 48 hours (cycled 7 hours ON and 1 hour OFF) of energy from a MIL-R-55344 RSI followed by 4.6.3. Peeling of the coating, cracked or broken glass or spectral transmission variance of more than 5 percent of the Group A transmission value (Table IV) shall constitute failure of this test.

4.7 Inspection of preparation for delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

5.1.1 Level A

5.1.1.1 Cleaning. Filter, IR for Searchlight, Infrared AN/VSS-3, shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Filter, IR for Searchlight, Infrared AN/VSS-3, shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation applications. None required.

5.1.1.4 Unit packaging. Each Filter, IR for Searchlight, Infrared AN/VSS-3, shall be individually packaged, Method III in accordance with MIL-P-116 as follows: Cushion each item by wrapping in paperboard conforming to PPP-P-291, type I and secure wrap with tape conforming to PPP-T-45, Type III, grade A. Place the cushioned item within a close-fitting box conforming to MIL-B-43014, form 1, style II, type A. Closure shall be in accordance with the appendix of the box specification.

5.1.1.4.1 Intermediate container. Filter, IR for Searchlight, Infrared AN/VSS-3, packaged as specified in 5.1.1.4, shall be placed in intermediate container conforming to MIL-B-43014, form 1, style II, type A in multiples of five, not to exceed 50 unit packages or 20 pounds. Box closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. Filter, IR for Searchlight, Infrared AN/VSS-3, shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited in-transit storage.

5.2 Packing. Packing shall be level A, B, or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A.

5.2.1.1 Consolidation. A quantity of Filters, IR for Searchlight, Infrared AN/VSS-3, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. To facilitate palletization, fiberboard boxes shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.2 Palletized load. A quantity of containers, packed as specified in 5.2.1.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147, except that the pallet shall be softwood conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

class weather resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, Type I, finish A or shrink film.

5.2.1.3 Less than palletized load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.1.1 shall be waterproofed with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. A quantity of the waterproofed containers shall be packed within a close fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceed 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, finish A.

5.2.2 Level B.

5.2.2.1 Consolidation. A quantity of Filters, IR for Searchlight, Infrared AN/VSS-3, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1.

5.2.2.2 Palletized load. A quantity of containers, packed as specified in 5.2.2.1, shall be palletized as specified in 5.2.1.2.

5.2.2.3 Less than palletized load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.2.1 shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, type IV as specified in the appendix of the box specification. No further packing shall be required.

5.2.3 Level C.

5.2.3.1 Consolidation. A quantity of Filters, IR for Searchlight, Infrared, AN/VSS-3 packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that the fiberboard boxes shall be class domestic.

5.2.3.2 Palletized load. A quantity of containers, packed as specified in 5.2.3.1, shall be palletized as specified in 5.2.1.2, except that the fiberboard cap shall be class domestic.

5.2.3.3 Less than palletized load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.3.1 shall be used as the shipping container. No further packing shall be required.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:39Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The filter is intended to be used with the AN/VSS-3 searchlight. The filtered output of the searchlight illuminates targets for observation with infrared optical systems while maintaining maximum security.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Production delivery schedule by month.

(c) Level of preservation and packaging and level of packing (see 5.1 and 5.2).

(d) The contract or purchase order will specify that the Government will supply GLP (see 3.8), unless the contractor is required to manufacture AN/VSS-3, one kilowatt searchlights.

(e) Clarify that the contractor is responsible to obtain the necessary MIL-R-55344 RSI for inspection and test.

(f) Actions required relative to Group C failures (see 4.5.5).

(g) Schedule for first article testing (see 4.3).

6.3 Definitions. For the purpose of this specification the following definitions apply.

6.3.1 Red glow. Red glow is visible red light which is emitted by the filter while filtering the energy of a MIL-R-55344 RSI, or a 100 watt incandescent lamp when the filter meets the spectral transmission characteristics of Figures 1, 2 & 3.

6.3.2 Damage. Damage is defined as deformation, loosening, breakage, corrosion or change of fit of any component or part.

6.3.3 "g". g is defined as an acceleration or deceleration of 32.17 feet per second per second.

6.3.4 Room temperature. Room temperature is defined as plus 23°C, plus or minus 3°C.

CUSTODIAN:


Army-EL
Navy-EC
Air Force-

PREPARING ACTIVITY:

Army-EL

Project No. 5855-0023

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the current version before use.

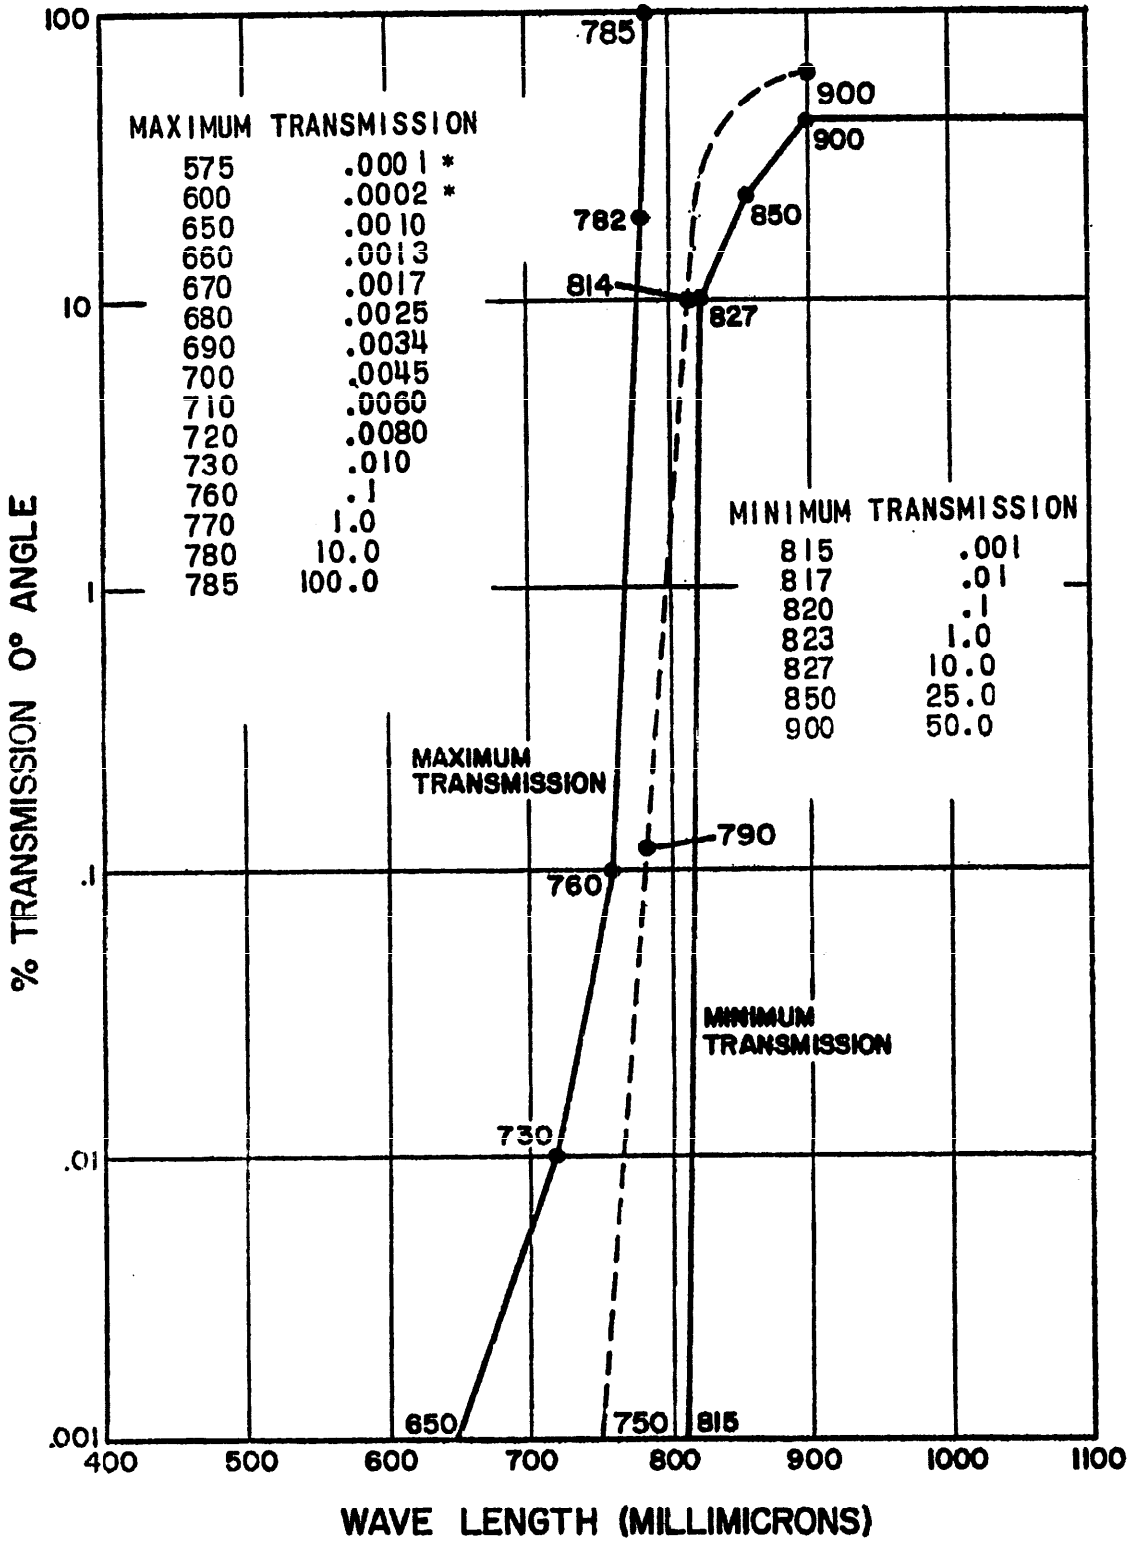


* WHILE THESE VALUES MAY NOT BE MEASURABLE, THEY ARE INTENDED TO SHOW THAT A CONTINUED SHARP CUT-OFF IS ESSENTIAL.

Spectral Transmission, 0° Angle

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the currentversion before use.

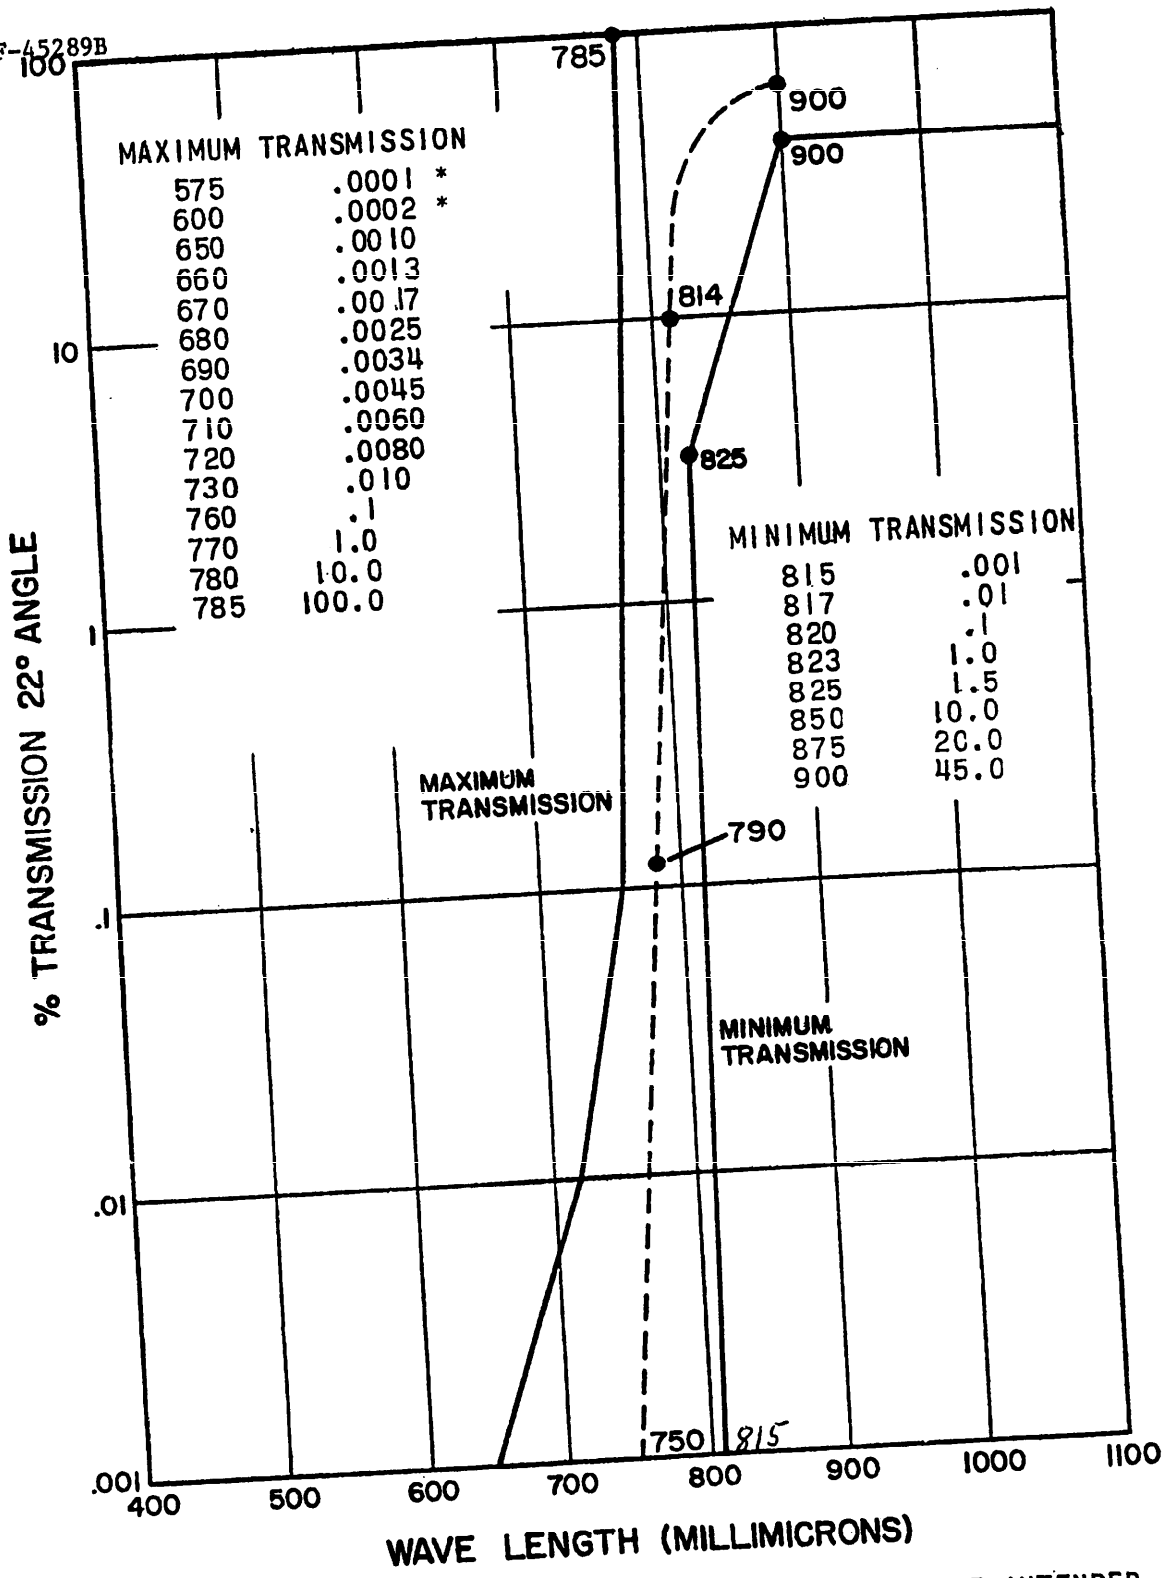


* WHILE THESE VALUES MAY NOT BE MEASURABLE, THEY ARE INTENDED TO SHOW THAT A CONTINUED SHARP CUT-OFF IS ESSENTIAL.

Spectral Transmission, 22° Angle

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the current version before use.

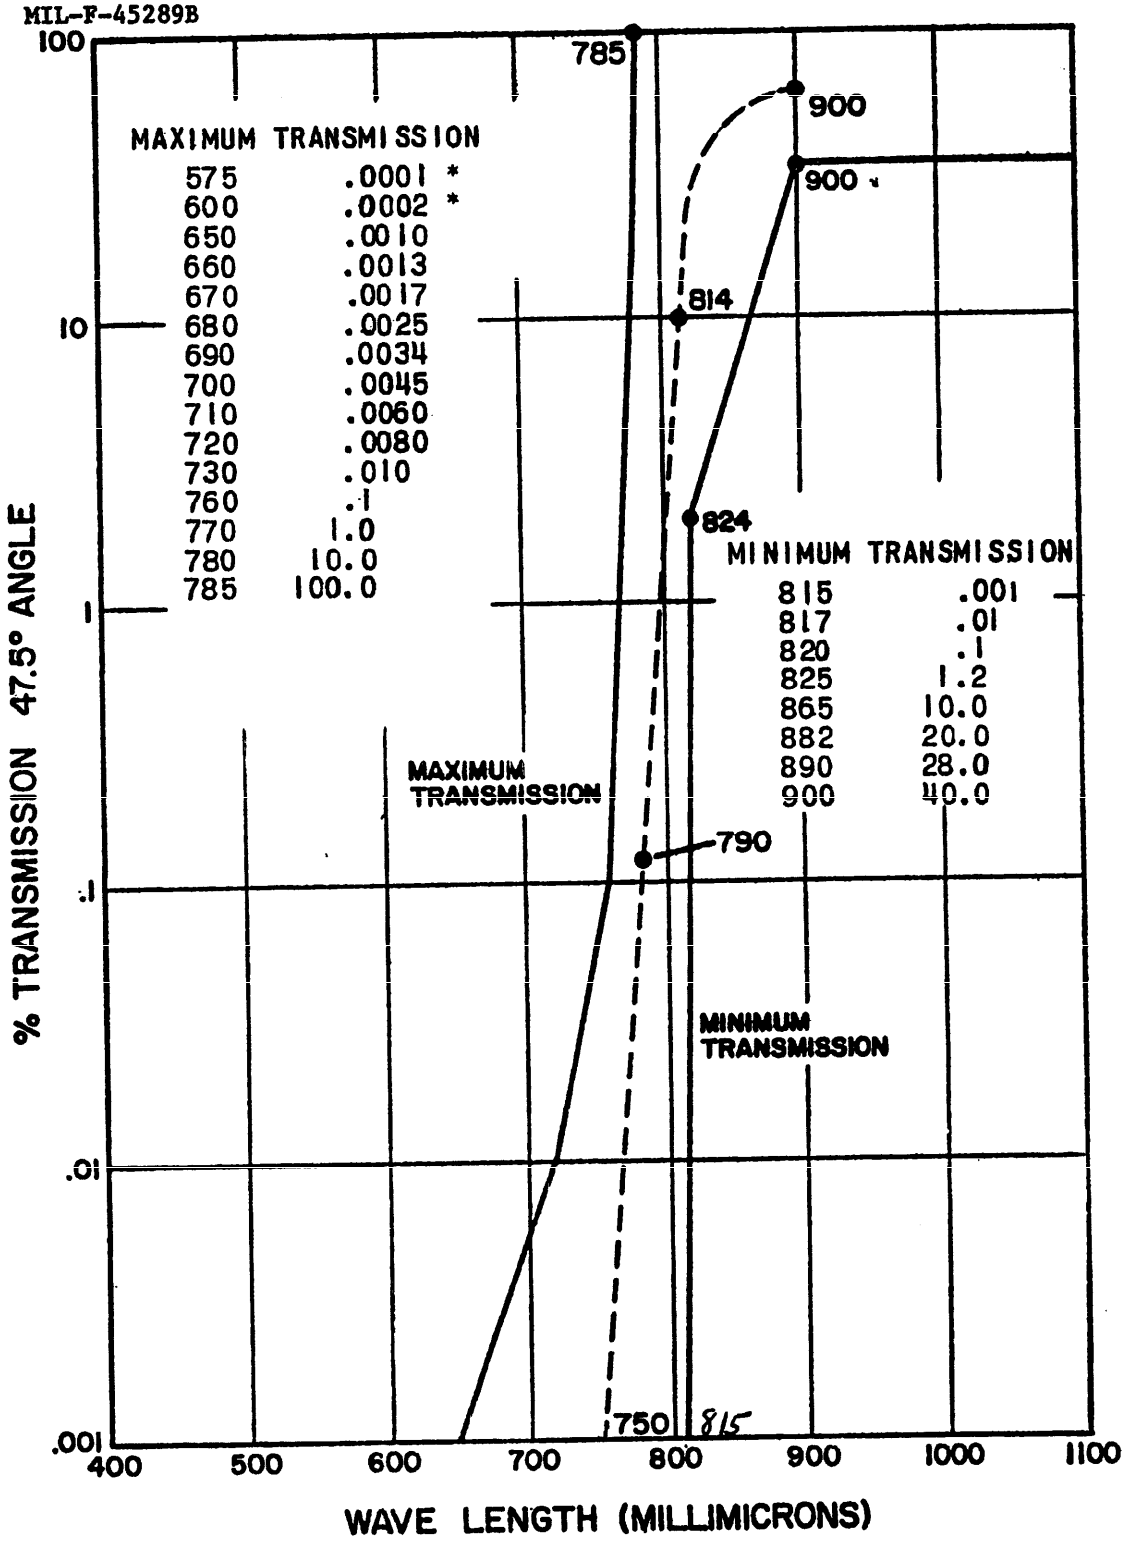

* WHILE THESE VALUES MAY NOT BE MEASURABLE, THEY ARE INTENDED TO SHOW THAT A CONTINUED SHARP CUT-OFF IS ESSENTIAL.

Spectral Transmission, 47.5° Angle

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-F-45289B FILTER, INFRARED INTERFERENCE - TYPE (PINK) FOR SEARCHLIGHT, INFRARED, AN/VSS-3 28 VOLT, 50-60 AMPERE

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:39Z
Check the source to verify that this is the current version before use.