INCH-POUND
MIL-DTL-32724
7 December 2022
SUPERSEDING
MC-PD 04/2011 SYSCOM
26 June 2012

DETAIL SPECIFICATION

CAP, HARDFACE, MICROFLEECE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a microfleece hardface cap.

1.2 Classification. The cap is of one type in the following classes and sizes, as specified (see 6.2).

1.2.1 Classes.

Class 1 – Coyote 498

Class 2 – Black 477

1.2.2 Schedule of sizes.

Small/Medium

Large/X-Large

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50199 - Thread, Polyester Core, Cotton or Polyester-Covered

A-A-52095 - Thread, Polyester Textured

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

CODE OF FEDERAL REGULATIONS (CFR)

40 CFR - Protection of Environment

(Copies of this document are available online at www.ecfr.gov.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC EP1 - Gray Scale for Color Change

AATCC EP2 - Gray Scale for Staining

AATCC EP8 - AATCC 9-Step Chromatic Transference Scale

AATCC EP9 - Visual Assessment of Color Difference of Textiles

AATCC TM8 - Colorfastness to Crocking: Crockmeter Method

AATCC TM15 - Colorfastness to Perspiration

AATCC TM16.3 - Test Method for Colorfastness to Light: Xenon-Arc

AATCC TM20 - Test Method for Fiber Analysis: Qualitative

AATCC TM22 - Water Repellency: Spray Test

AATCC TM61 - Test Method for Colorfastness to Laundering: Accelerated

AATCC TM135 - Dimensional Changes of Fabrics after Home Laundering

(Copies of these documents are available online at www.aatcc.org.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at www.asq.org.)

ASTM INTERNATIONAL

ASTM D737 - Standard Test Method for Air Permeability of Textile Fabrics

ASTM D1777 - Standard Test Method for Thickness of Textile Materials

ASTM D1907/D1907M - Standard Test Method for Linear Density of Yarn (Yarn Number) by the Skein Method

ASTM D2594/D2594M - Standard Test Method for Stretch Properties of Knitted Fabrics Having Low Power

ASTM D3512/D3512M - Standard Test Method for Pilling Resistance and Other Related Surface Changes of Textile Fabrics: Random Tumble Pilling Tester

ASTM D3776/D3776M - Standard Test Methods for Mass Per Unit Area (Weight) of Fabric

ASTM D3990 - Standard Terminology Relating to Fabric Defects

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

ASTM D4966 - Standard Test Method for Abrasion Resistance of Textile Fabrics (Martindale Abrasion Tester Method)

ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of these documents are available online at www.astm.org.)

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO 11092 - Textiles – Physiological Effects – Measurement of Thermal and Water-Vapour Resistance Under Steady-State Conditions (Sweating Guarded-Hotplate Test)

(Copies of this document are available online at www.iso.org.)

ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT (OECD)

OECD Guidelines for the Testing of Chemicals, Section 4, Test No. 404 - Acute Dermal Irritation/Corrosion

OECD Guidelines for the Testing of Chemicals, Section 4, Test No. 406 - Skin Sensitisation

(Copies of these documents are available online at https://www.oecd-ilibrary.org/.)

SAE INTERNATIONAL

AMS-STD-595 - Colors Used in Government Procurement

AMS-STD-595/20150 - Coyote 498

AMS-STD-595/37029 - Black 477

(Copies of these documents are available online at www.sae.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to a conformance inspection in accordance with 4.4.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Design. The cap is a bell shape, pull-on style consisting of a single pattern piece (see 3.8.1.1) with a joining seam to create a circle and points sewn to create a crown at the top. The cap has a 4±1/8-inch wide hem that can be worn cuffed or down over the ears (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

3.4 Materials.

3.4.1 Basic material. The basic material for the cap shall be a blend of polyester and spandex (see table I) in a circular knit with an abrasion-resistant stretch jersey face and velour back. The stretch jersey face shall provide water resistance, wind resistance, and breathability based on the knit construction and surface treatment and shall have no lamination. The color of the fabric for class 1 shall match Coyote 498 (AMS-STD-595 color chip 20150), the color of the fabric for class 2 shall match Black 477 (AMS-STD-595 color chip 37029). The material shall conform to the physical requirements specified in table I.

TABLE I. Material physical requirements.

Material Characteristic	Material Requirement
Fiber content percent (±5%)	85% polyester and 15% spandex
Yarn denier (average), denier per filament	1.0-1.2
Construction	Circular terry knit/single-sided velour
Weight (ounces per square yard)	8.8±0.85
Air permeability (cfm/square foot) 1/ (maximum)	85
Colorfastness to: (rating) (minimum)	
Laundering (3 cycles) (polyester only)	3-4
Crocking	
Wet	3.0
Dry	3.5
Light (20 hours or 85 kilojoules [kj])	4.0
Perspiration color change	3
Staining – polyester only	3
Dimensional stability – (percent) (maximum) (3 cycles)	
Wales	5
Courses	5
Pilling, rating (minimum)	4.5
Stretch, loose fit (percent) (minimum)	
Length (wales)	30
Width (courses)	40
Water repellency (spray test rating) (minimum) 2/	90, 90, 90
Thickness at 0.6 psi 3/ (inches)	0.06-0.12
Thermal insulation, Clo (minimum)	
Initial	0.3
After 3 launderings	0.3
Abrasion resistance, 1,000 cycles	No significant damage

FOOTNOTES:

1/ cfm = cubic feet per minute

2/ Samples of unlaundered material reported individually

3/ psi = pounds per square inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

3.5 Thread. Thread for needle and bobbin (looper) shall be 100 percent textured, 2- or 3-ply, polyester thread, Tex size 35, conforming to A-A-52095 or 2- or 3-ply cotton or polyester covered polyester core thread, Tex size 35, conforming to A-A-50199. The thread color shall match the color of the basic fabric (see 3.4.1).

3.6 Labels. Each cap shall have a combination identification/size label, an instruction label, and a barcode label/tag.

3.6.1 Identification/size label. The identification/size label shall be in accordance with type VI, class 4 of MIL-DTL-32075. The inscription shall have a minimum font size of 10 points. The color of the label shall be white. The label shall contain the information below.

CAP, HARDFACE, MICROFLEECE

CONTRACT NO.:

NSN:

FIBER CONTENT:

SIZE:

CONTRACTOR'S NAME:

3.6.2 Instruction label. The instruction label shall be in accordance with type VI, class 3 of MIL-DTL-32075. The color of the label shall be white. If available, a basic material supplier care label and hang tag may be used but shall contain the information listed below.

Cold Wash

Tumble Dry Low or Line Dry

DO NOT USE BLEACH

DO NOT USE FABRIC SOFTENER

DO NOT IRON

3.6.3 Barcode label/tag. Each cap shall be individually barcoded with a label/tag in accordance with type VI, class 17 of MIL-DTL-32075. The label/tag shall be located so that it is completely visible on the item when it is folded, packaged, or folded and packaged and shall cause no damage to the item.

3.6.4 Label placement. The labels shall be securely attached to the cap and positioned as specified in a through c below. Attachment stitching shall not obscure any label information.

a. Identification/size label. On the inside of the cap as worn, 1/4 inch to the right of the center back joining seam (±1/4 inch), placed horizontally with the top edge not greater than 1/4 inch below the hem cover stitching and the remaining edges stitched to the hem 1/16 to 3/16 inch from the edge. The label attachment stitching shall not be visible on the outside of the cap.

b. Instruction label. Catch in the center back joining seam, 1/2±1/8 inch above the top edge of the hem.

c. Barcode label. Attach to the cap at the center of the crown on the outside of the cap.

3.7 Toxicity. When tested as specified in 4.5.5, the finished cap shall not present a health hazard and shall show compatibility with prolonged, direct skin contact, as specified in 40 CFR §798.2250, Dermal Toxicity, and 40 CFR §798.4100, Dermal Sensitization. Chemicals recognized by the Environmental Protection Agency as human carcinogens shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

3.8 Construction.

3.8.1 Patterns. The Government will provide a complete set of patterns (see 6.2), which show size, directional lines, placement marks, and notches for assembly. Standard patterns provide an allowance of 3/8 inch for all joining seams. The Government patterns shall be used to create a working pattern. Minor modifications are permitted to the working pattern where necessary when using automatic equipment or to accommodate a manufacturing process. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in this specification.

3.8.1.1 Pattern parts. The cap patterns shall utilize the pattern part specified in table II.

TABLE II. Pattern part.

Material	Nomenclature	Cut Part
Basic material (see 3.4.1)	Cap	1

3.8.2 Stitches, seams, and stitching. All stitching and seams shall conform to ASTM D6193. The cap shall be constructed in accordance with the stitch types and seam types in table III.

TABLE III. Stitching.

Seaming Area	Seam Type	Stitch Type	Stitches Per Inch
Join darts and close center back seam	LSa or FSa	607	8-10
Identification/size label	LSbj-1	301	8-10
Hem stitching	EFa	605	8-10

3.8.3 Tacking and backstitching. Ends of seams and rows of stitching with 301 type stitch, when not caught in other seams or stitching, shall be securely backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

3.9 Color.

3.9.1 Visual shade matching. Unless otherwise specified (see 6.2), samples shall be verified for shade matching (see 6.4.2) in accordance with 4.5.4. Class 1 caps shall match Coyote 498 (AMS-STD-595 color chip 20150) and class 2 caps shall match Black 477 (AMS-STD-595 color chip 37029).




3.10 Finished measurements. The cap shall conform to the dimensions specified in table IV when measured in accordance with table V. The cap shall be laid flat with hem edges even.

TABLE IV. Finished measurements (inches).

Measurement	Small/Medium	Large/X-Large	Tolerance
1/2 circumference (A)	10-1/2	11-1/4	±1/4
Cap height (B)	10	10	±1/4
Hem width (C)	4	4	±1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

TABLE V. Finished measurement description.

Measurement	Measurement Description	Figure
1/2 circumference (A)	Measurement from folded edge to folded edge at the base of the cap.	
Cap height (B)	Measurement along the center back joining seam from the top of the cap to the bottom edge of the hem.	
Hem width (C)	Measurement from the top of the cover stitch to the base of the hem.	

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.4).

4.2 First article inspection. A first article inspection shall consist of the end item examinations and tests specified (see 4.5.3). The first article inspection shall be considered a failure if the requirements specified in section 3 are not met.

4.2.1 First article samples. Unless otherwise specified in the procurement document (see 6.2), first article samples shall be provided. The sample size will be specified in the procurement document (see 6.2). The sample unit shall be one cap.

4.3 Materials and components inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of reference documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement document (see 6.2). In addition to testing provisions specified in reference documents, components shall be tested for the characteristics specified in this specification. Tests shall be conducted with both the specimen and test apparatus under standard conditions as defined in the specified test methods. All requirements are applicable to the sample unit. In order to facilitate evaluation, test reports should contain the individual values utilized in expressing final results. The lot shall be rejected if one or more sample units fail to meet any test requirement specified. Unless otherwise specified in subsidiary specifications, sampling shall be as specified in table VI.

TABLE VI. Component and material sampling.

Lot Size	Sample Size (Sample Unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. In accordance with 4.1, conformance inspection shall include the examinations specified in 4.5.

4.4.1 Conformance inspection samples. Sampling for conformance inspection shall be performed in accordance with ASQ/ANSI Z1.4 (see 6.2). The sample unit shall be one cap and the lot shall be expressed in units of caps.

4.5 Examinations and tests.

4.5.1 Visual examination. The end item shall be visually examined for defects in shade, design, material, construction, and workmanship, with defects classified in accordance with table VII. Material defect definitions are as specified in ASTM D3990.

TABLE VII. Defects.

Examination	Defect	Classification	
		Major	Minor
Material	Hole, cut, tear, mend, patch, run, needle chew, or weakening defect in the material on the outside of the cap.	101	
Shade	Shade variation within a part.	102	
	Color not as specified.	103	
	NOTE: Parts suspected as being shaded shall be examined at a distance of 3 feet against the background of the other parts and colors of the garment. When the shade difference is readily discernible under these examining conditions, it shall be scored as a shaded part.		
Stitches, seams, and stitching	Seams: puckered, distorted, pleated, wavy, or twisted.		201
	Irregular or open seam; raw edges (greater than 1/8 inch up to and including1/4 inch).		202
	Irregular or open seam; raw edges (greater than 1/4 inch).	104	
	Stitches: broken or missing thread or stitch.		203
	Loose stitch tension resulting in loose seam (greater than 1 inch but not greater than 2 inches).		204
	Loose stitch tension resulting in loose seam (greater than 2 inches).	105	
	Seam or stitch type not as specified.		205
	Stitches per inch not as specified		
	Less than 1 inch		206
	1 inch or more	106	
	NOTE: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam. On hem stitching, a seam is considered open when one or both sides of the double stitched seam is open. Raw edge not securely caught in stitching shall be classified as an open seam.		
Cleanness	Spot, stain, excessive thread ends not trimmed or removed, raw edges, unpleasant odor.		207

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

TABLE VII. Defects - Continued.

Examination	Defect	Classification	
		Major	Minor
Labels	Label omitted, incorrect, illegible, not attached as specified.	107	
	Barcodes omitted, not readable by scanner; human readable interpretation omitted or illegible.		208
	Barcode not visible on folded, packaged item.		209
	Barcode attachment causes damage to the cap.	108	
Workmanship	Any component part omitted or not as specified; distorted, full, tight, or twisted parts. Any defect not specified in this table that affects form, fit, or function.	109	

4.5.2 Dimensional examination. The end item shall be examined for conformance to the dimensions specified in table IV.

4.5.3 Physical testing. Requirements cited in table I shall be verified through the test methods in table VIII.

TABLE VIII. Test methods.

Material Characteristic	Verification
Fiber content	AATCC TM20
Yarn denier	ASTM D1907/D1907M
Construction	Visual
Weight	ASTM D3776/D3776M
Air permeability	ASTM D737
Colorfastness to:	
Laundering (3 cycles), polyester only	AATCC TM61, option 2a 1/, 2/
Crocking	
Wet	AATCC TM8 3/
Dry	AATCC TM8 3/
Light (20 hours or 85 KJ)	AATCC TM16, options A and E
Perspiration color change	AATCC TM15 1/
Staining	AATCC TM15 2/
Dimensional stability (3 cycles)	AATCC TM135(1), IV, (A)
Pilling	ASTM D3512/D3512M (random tumble)
Stretch, loose fit	
Wales	ASTM D2594/D2594M
Courses	Width loose fit
Water Repellency	AATCC TM22 4/
Thickness at 0.6 psi 5/	ASTM D1777

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

TABLE VIII. Test methods - Continued.

Material Characteristic	Verification
Thermal insulation	
Initial	ISO 11092
After 3 launderings	AATCC TM135(1), IV, (A)
Abrasion resistance	ASTM D4966, option 1 6/

FOOTNOTES:

1/ Assessed in accordance with AATCC EP1.

2/ Assessed in accordance with AATCC EP2.

3/ Assessed in accordance with AATCC EP8.

4/ Results of three test samples of unlaundered material shall be reported individually. Water repellency to the hardface side of the fabric.

5/ psi = pounds per square inch

6/ Abrasion to the hardface side of the fabric.

4.5.4 Visual shade matching. The color and appearance of the cap shall match the color standard (see 3.9.1) when viewed using the AATCC EP9, option C (see 6.4) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500±200 Kelvin (K) illumination of 100±20 foot candles. Alternatively, the color and appearance of the cap shall match the color standard (see 3.9.1) with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500±200K illumination of 100±20 foot candles in lieu of CIE Illuminant D65 (see 6.4.1). The cap shall also be a good match to the color standard with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856±200K.

4.5.5 Toxicity test. When the toxicity requirement (see 3.7) can be demonstrated with historical use data, toxicity testing may not be required on the finishing treatments used. If dermal toxicity testing is required (see 6.2), it shall be conducted in accordance with 40 CFR §798.2250 and 40 CFR §798.4100, which are consistent with OECD Guidelines for the Testing of Chemicals, Section 4, Test Nos. 404 and 406 (see 6.5).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This item is intended for wear by military personnel of the DoD in cold-weather environments.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Sizes required (see 1.2).

c. Specific issue of individual documents referenced (see 2.2 and 2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

d. When first article is required (see 3.1.1 and 6.3).

e. When conformance inspection is required (see 3.1.2).

f. National stock number.

g. Applicable Government patterns (see 3.8.1).

h. Shade standard information (see 3.9.1 and 6.4.2).

i. Exclusions, amendments, modifications, or qualifications to material or component tests or inspections (see 4.3 and 4.4.1).

j. Number of first article inspection samples (see 4.2.1).

k. When dermal toxicity testing is required (see 4.5.5).

l. Packaging requirements (see 5.1).

6.3 First article. When first article inspection (see 4.2) is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.2.1. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product that has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Visual shade matching. In 2017, option A of AATCC EP9 was changed to option C. NOTE: In case of confusion, the viewing geometry should be, "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5°) angle relative to the horizontal. The observer will view the specimens at a 90° angle, relative to the plane of the specimens."

6.4.1 Use of CIE illuminant D75 illumination source. In 2022, all services of the United States military accepted CIE Illuminant D65 (see 4.5.4) as the new preferred light source for visual shade matching due to the supply chain issues with CIE Illuminant D75.

6.4.2 Shade criticality. Some items may be deemed "non-shade-critical" by the contracting agency and alternative shade standards or information regarding shade may be specified in the contract or order (see 6.2). It is recommended that manufacturers refer to the contract or order to determine the criticality of the shade matching or alternate shade standards that are acceptable.

6.5 Toxicity testing. OECD Test No. 406, Skin Sensitization and OECD Test No. 404, Acute Dermal Irritation/Corrosion adequately have been suggested to assess the requirement in 3.7, but other methods may be used.

6.6 Subject term (key word) listing.

Cold weather

Fleece

Headwear

Polyester

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

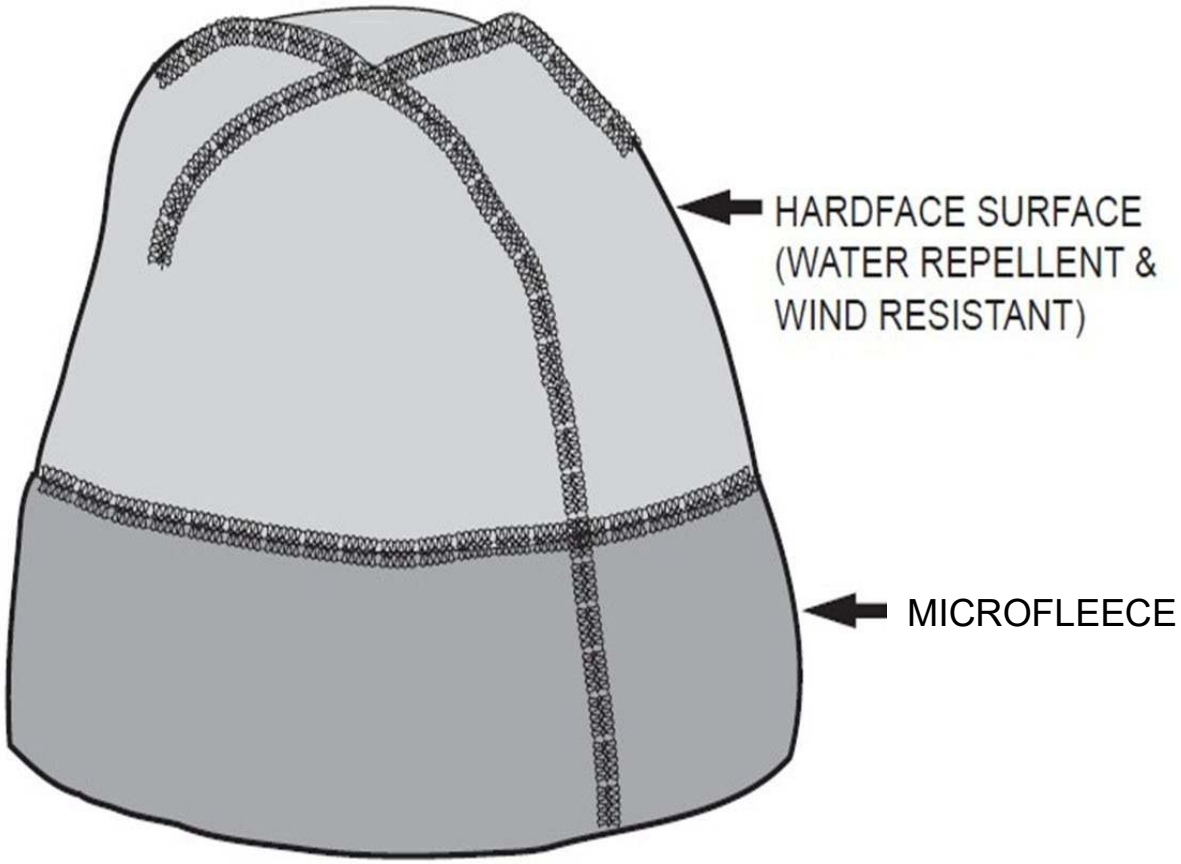


FIGURE 1. Cap, hardface, microfleece (outside view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – GL
Navy – MC
Air Force – 11

Review activities:
Army – AV, CR, MI
Navy – AS, CG1, NU
Air Force – 03, 70
DLA – CT

Civil agency:
GSA – FAS

Preparing activity:
Navy – MC
(Project 8415-2022-047)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:40Z
Check the source to verify that this is the current version before use.