INCH-POUND


MIL-DTL-32746/1
28 Feb 2025

MILITARY DETAIL SPECIFICATION SHEET

FILTER ELEMENTS, FLUID PRESSURE, HYDRAULIC LINE, 14 MICRON (C) AND 6 MICRON (C), TYPE II SYSTEMS, H-60 HELICOPTER RESERVOIR FILTER SPECIFICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for precuring the filter element described herein shall consist of this document and the latest issue in effect of Specification MIL-DTL-32746.

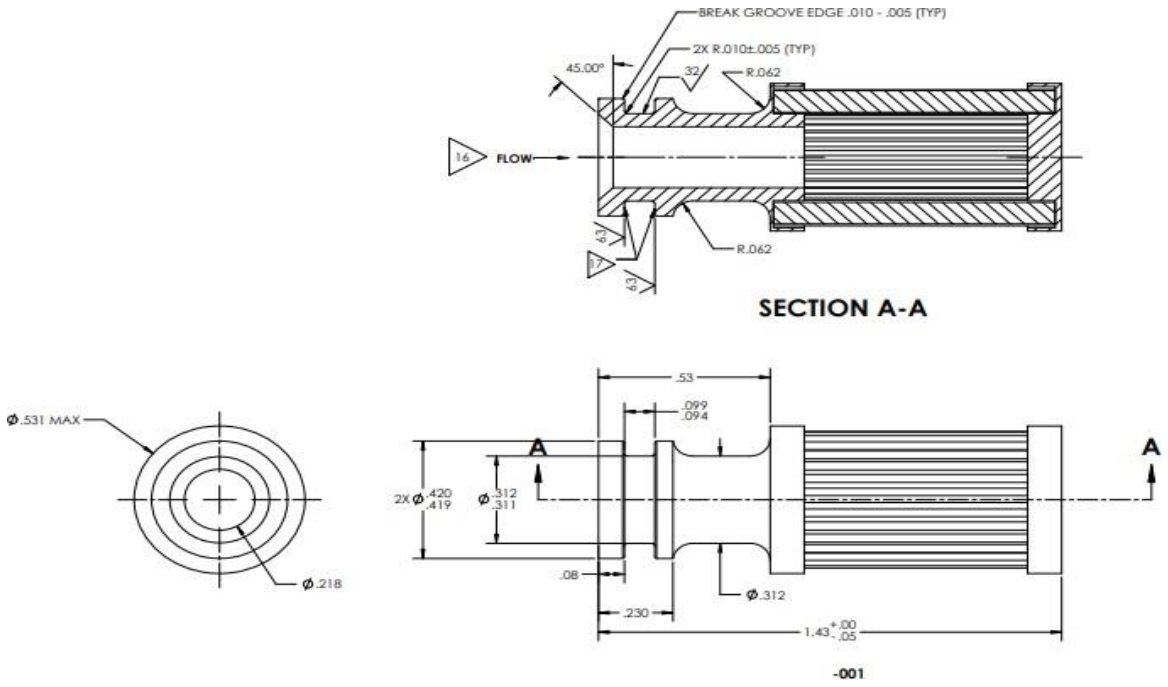

NOTES: See US Army Aviation and Missile Command Redstone Arsenal, Alabama 35898 Filter Element, Fluid Drawing 1092900, dated 7 July 2022. Source Control Drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Maximum Weight: 0.23 ounces – Maximum dry weight

Pressure Drop: 15 psid.

Degree of Filtration: Beta 10 at 5-Micron
Beta 15 at 10-Micron
Beta 20 at 25-Micron

Element Collapse: 75 psid (No visible sign of rupture)

Cold Start: None.

Part Number: The part number consists of the basic number of this specification sheet and / number. Example: MIL-DTL-32746/XXXX

Intended Use: The filter element covered by this specification sheet is intended for use in the UH-60 helicopter hydraulic reservoir. The hydraulic fluid used will conform to MIL-PRF-5606, MIL-PRF-83282, and MIL-PRF-87257. Nominal operating pressures will be below 50 psi.

Custodians:
Army – AV
Airforce – 11

Preparing activity:
Army – AV
(Project No. 1650-2025-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.