
DETAIL SPECIFICATION SHEET

FILTER ELEMENTS, FLUID PRESSURE, HYDRAULIC LINE, 14 MICRON (C) AND 6 MICRON (C), TYPE II SYSTEMS, 3,000 PSI, - 65°F TO 275°F, H-60 AIRCRAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32746.

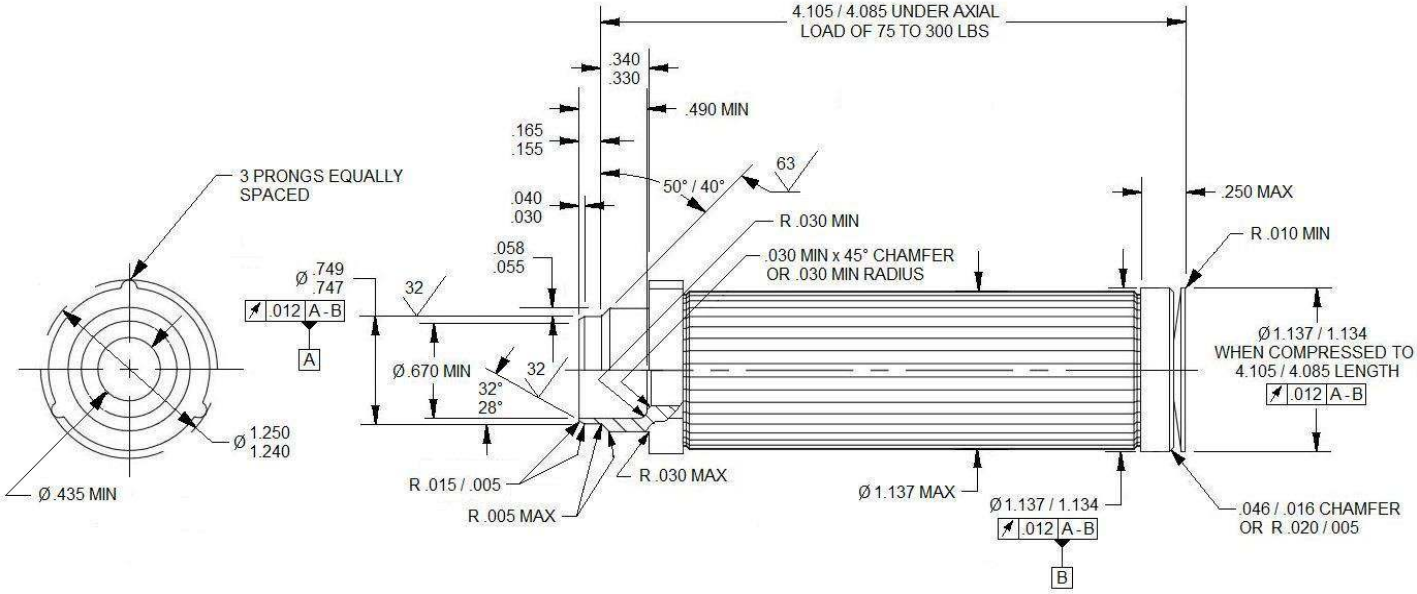

DRAWING NOTES:

1. Dimensions in inches unless otherwise specified.
2. Tolerances, decimals +/- .010, angles +/- 5°.
3. Finish all over 100% except as noted. Surface texture in accordance with ASME B46.1 (ANSI) only to machined surfaces.
4. Material shall be in accordance with the procurement specification.
5. Drawing symbols per ASME Y14.5.
6. Weight of filter element is 0.275 lbs dry max.
7. Rated flow is 6.0-gpm.

FIGURE 1. Filter element dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Pressure Drop: The pre-cold start pressure drop across the element at 100°F, 6-gpm flow rate shall not be greater than 21.5 psid.

Degree of Filtration: Filter elements provided under this military specification sheet shall meet the following minimum performance requirements at 6 microns (c) at 300 psid terminal pressure across the test element. See Paragraph 4.6.7 of the base specification:

Grand Average ($\alpha_{6(c)}$):	140
AFR (High to $Low_{6(c)}$):	35
AFR (Low to $High_{6(c)}$):	35
Retained Capacity:	2.6 grams

where (c) signifies particle sizes per ISO 11171

Element Collapse: The filter element shall withstand a differential pressure of 4,500 psid in accordance with ISO 2941. See Paragraph 4.6.11 of the base specification.

Cold Start: The filter elements shall withstand 3,000 psid differential pressure across the element for the 10 flow cycles and fluid temperature as specified in the base specification. See Paragraph 4.6.6 of the base specification. The element pressure drop shall not exceed 10 psid following cold start test.

Flow Fatigue: The filter element shall withstand the following flow fatigue pressure cycles at a cycling rate of 100 cycles per minute maximum**:**

90,000 cycles at 20 psid pressure drop
8,000 cycles at 50 psid pressure drop
2,000 cycles at 100 psid pressure drop
500 cycles at 3,000 psid pressure drop

Part Number: The part number consists of the basic number of this specification sheet and a slash number. The format is as follows, using 2 for example: MIL-DTL-32746/2.

Intended Use: The filter element covered by this specification sheet is intended for use as specified in paragraph 6.1 of the base document and specifically for use on all H-60 Helicopters.

Referenced Documents: In addition to MIL-DTL-32746, this specification sheet references the following documents:

ASME B46.1	ASME Y14.5
ISO 2941	ISO 11171

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Air Force -11

Preparing activity:
Army - AV
(Project 1650-2025-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.