INCH-POUND
MIL-DTL-32747
w/AMENDMENT 1
3 June 2025
SUPERSEDING
MIL-DTL-32747
20 June 2023

DETAIL SPECIFICATION

TROUSERS, MEN'S – DRESS AND SERVICE, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for men's dress and service trousers of the types, classes, styles, and sizes specified in 1.2.

1.2 Classification. The specific types, classes, styles, and sizes to be produced are specified in the contract or order (see 6.2).

1.2.1 Types. The trousers are available in the following types, as specified (see 6.2).

Type I - Side pockets and hip pockets

Type II - Side pockets only

Type III - Side pockets, hip pockets, and ID pocket

Type IV - Hip pockets only

1.2.2 Classes. The trousers are available in the following classes, as specified (see 6.2).

Class 1 – Polyester/wool gabardine, Green Shade 2212

Class 2 – Polyester/wool gabardine, Sky Blue Shade 2319

Class 3 – Polyester/wool gabardine, Dark Blue Shade 2312

Class 4 – Polyester/wool gabardine, Black Shade 2607

Class 5 – Broadcloth wool, Dark Blue Shade 2307

Class 6 – Polyester or polyester/cotton gabardine, White Shade (see 3.5.2)

1.2.3 Styles. The trousers are available in the following styles, as specified (see 6.2).

Style A – With no stripes and hook/eye front waistband closure

Style B – With 2-inch-wide scarlet stripes and button front waistband closure

Style C – With 1-1/2-inch-wide scarlet stripes and button front waistband closure

Style D – With gold and scarlet stripes and button front waistband closure

Style E – With white and scarlet stripes and hook/eye front waistband closure

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

1.2.4 Schedule of sizes. The trousers are of the following waist sizes and inseam lengths, as specified (see 6.2).

1.2.4.1 Waist size. The trouser waist sizes are as follows:

26	27	28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45	46	

NOTE: Some of the types, classes, and styles covered by this specification might not typically be available in all identified sizes.

1.2.4.2 Inseam lengths. Trousers are produced unhemmed; the inseam lengths have appropriate turnup to be tailored to the following finished inseam lengths:

32	34	36	38	40

1.2.5 Individual orders. When trousers are produced to an individual order, this specification will govern, except the dimensional requirements of section 3 may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50198 - Thread, Gimp, Cotton, Buttonhole

A-A-50199 - Thread, Polyester Core, Cotton or Polyester-Covered

A-A-52094 - Thread, Cotton

A-A-52106 - Cloth, Twill or Plain Weave, Polyester and Polyester Blend

A-A-55634 - Zippers (Fasteners, Slide Interlocking)

A-A-59826 - Thread, Nylon

A-A-59992 - Cloth, Interfacings: Woven, Cotton and Synthetic

A-A-59994 - Button, Sewing Hole, and Button, Staple, (Plastic)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-3738 - Cloth, Elastique, Wool

MIL-DTL-10176 - Cloth, Gabardine: Wool, Polyester and Wool

MIL-DTL-20271 - Lace, Gold – Ornamental

MIL-DTL-21115 - Cloth, Tropical: Wool, Polyester/Wool

MIL-DTL-29405 - Cloth, Broadcloth: Wool and Wool/Nylon

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

MIL-S-82155 - Stripe, Trouser, Dress

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1488 - Provisions for Evaluating of Quality of Trousers

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

MARINE CORPS SYSTEMS COMMAND – PRODUCT MANAGER, INFANTRY WEAPONS (PM – IW)

MC/PD 08-12 SYSCOM - Cloth, Twill, Polyester

(Copies of this document are available by emailing USMC_STDZ@usmc.mil.)

NAVY CLOTHING AND TEXTILE RESEARCH FACILITY (NCTRF)

NCTRF PD 87052 - Cloth, Twill, Polyester

(Copies of this document are available from Navy Clothing and Textile Research Facility, 10 General Greene Avenue, Natick, MA 01760.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of this document are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.1.2 Conformance sample. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.3.

3.2 Standard sample. Standard samples, when provided, are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.3 Design. Trousers have a two-piece, lined waistband with an outlet at the seat seam, pockets (see 3.3.1), French-type fly (see 3.3.2) with slide fastener, outlet from crotch to knee at the inseam, and unhemmed leg bottoms. All types have seven belt loops on waist sizes 36 and below and eight belt loops on waist sizes 38 and up. Select features are available on selected types, classes, and styles only; differences in trouser types, classes, and styles are specified in 3.3.1 through 3.3.4. All references to “left” and “right” in this specification refer to “as worn”.

3.3.1 Pockets.

3.3.1.1 Hip pockets. Type I, III, and IV trousers have hip pockets with flaps secured by one button (see 3.5.9) on each.

3.3.1.2 Side pockets. Type I, II, and III trousers have straight side pockets with openings at the outseams of the trousers.

3.3.1.3 ID pocket. Type III trousers have an ID pocket in addition to hip and side pockets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

3.3.2 French-type fly. The front closure on all types, classes, and styles of trousers have fabric behind the slide fastener, secured inside the waistband with a button (see 3.5.9). The French-type fly may be formed either by using a flap-style right fly with an integrated buttonhole or by the addition of a "fly tab" on the right fly (see 3.6.1).

3.3.3 Striping. Trousers in styles B, C, D, and E have stripes (see 3.5.11) attached on the outseams. Scarlet-colored broadcloth stripes are used on styles B (2-inch-wide stripes) and C (1-1/2-inch-wide stripes). Style D trousers have gold and scarlet stripes. Style E trousers have scarlet and white stripes.

3.3.4 Closure. Trousers in styles A and E have a hook and eye closure (see 3.5.7) at the front of the waistband. Style B, C, and D trousers have a button closure (see 3.5.9) at the front of the waistband.

3.4 Figures. Figures 1 through 9 are provided for information only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Materials and components.

3.5.1 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.5.2 Basic material. The basic material used for each class of trousers shall be in accordance with the corresponding fabric specification cited in table I.

TABLE I. Basic material.

Class	Requirement	Shade	Description
1	MIL-DTL-10176, type II, class 12	Green 2212	Polyester/wool gabardine
2	MIL-DTL-10176, type II, class 12	Sky Blue 2319	Polyester/wool gabardine
2 (Alternate) 1/	MIL-DTL-3738, type III	Sky Blue 2319	Wool elastique
3	MIL-DTL-10176, type II, class 12	Dark Blue 2312	Polyester/wool gabardine
4	MIL-DTL-21115, type III, class 1	Black 2607	Polyester/wool tropical
5	MIL-DTL-29405, type 1	Dark Blue 2307	Broadcloth, wool
6	NCTRF PD 87052	White 3006	Polyester twill
6 (Alternate)	MC/PD 08-12 SYSCOM, type I, class 1	White 2415	Polyester twill

FOOTNOTE:

1/ Wool elastique fabric may be used as an alternate on class 2, style C trousers only.

3.5.3 Lining, interfacing, pocket stays, and pocketing. The material for lining the waistband, right fly, pocket flaps, and crotch; for the left fly interfacing; for the pocket stays; and for the pocketing shall be a polyester or polyester/cotton twill or plain weave cloth conforming to A-A-52106, class 1 when tested as specified in 4.4.1. For all classes except for class 6, the color shall be black. For class 6, the color shall be white.

3.5.4 Buckram. The material interfacing the waistband shall be bleached or unbleached cotton buckram conforming to A-A-59992, type III, class 5 or 6 when tested as specified in 4.4.1. Buckram may be used to provide additional structure in the scarlet stripes for styles B and C. Buckram shall not be visible on the outside of the trousers when worn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

3.5.5 Waistband stabilizer. The material for the waistband stabilizer shall be a cotton or synthetic and nylon interfacing cloth conforming to A-A-59992, type I, class 1 or 2, or type III, class 5 or 6 when tested as specified in 4.4.1. Alternatively, a commercial type ban roll waistband may be used. The stabilizer shall not be visible on the outside of the trousers when worn.

3.5.6 Slide fastener. The slide fastener shall conform to A-A-55634, type I, style 1 or 2 (continuous) or style 4 or 5 (preassembled), cam or semi-automatic locking, size 4 to 5, short tab pull when tested as specified in 4.4.1. All metal components of the slide fastener shall be brass, except for the cover and spring on a semi-automatic pin lock, which shall be stainless steel. All component parts shall be from the same supplier. Styles 1 and 2 require the application of a slider and bottom stop during the production of the trousers. Unless otherwise specified (see 6.2), the color of the slide fastener tape shall approximate the shade of the basic material (see 3.5.2). If dyed, the slide fastener tape shall show a colorfastness rating of 3.5 or higher to dry cleaning.

3.5.7 Hook and eye. The hook and eye for the waistband closure on styles A and E trousers shall be a nickel-plated hook with a width of 0.3±0.01 inch and applicable nickel-plated eye with associated backing plates when tested as specified in 4.4.1 (see 6.4). Hook and eye, and any associated attachment pieces, shall not be visible on the outside of the trousers when worn.

3.5.8 Thread. The threads used in the construction of the trousers shall conform to the requirements of the thread documents cited in table II when tested as specified in 4.4.1. Unless otherwise specified (see 6.2), the thread shade shall be a good match to the shade of the basic fabric. When more than one option is presented, either may be used.

TABLE II. Thread requirements.

Use (stitch type)	Description	Document	Tex	Ply
Seaming (stitch type 301 and 401). Raise, edge, and topstitching	Cotton-covered polyester core	A-A-50199, type I	36-45 for needle	2
			36-45 or 31-35 for bobbin	
Overedging (stitch type 504)	Cotton-covered polyester core	A-A-50199, type I	31-35 for needle and looper	2
	Cotton, soft	A-A-52094, type I	30 for needle and looper	3
Bartacks	Cotton-covered polyester core	A-A-50199, type I	36-45 for needle and bobbin	2
Buttonholes	Cotton, soft	A-A-52094, type I	40 for needle and bobbin	2
Buttons	Cotton, glazed	A-A-52094, type II	105 or 90	4
Buttons (automatic sew and wrap in one operation)	Nylon, waxed	A-A-59826, type III	Special no. 5	Monocord
Buttonhole reinforcement	Cotton gimp	A-A-50198, type I or type II	210	--

3.5.9 Buttons. The buttons for pocket flaps and fly tabs shall be melamine formaldehyde composition, conforming to type I, class 1, style 4, 22-ligne of A-A-59994 in a glossy finish when tested as specified in 4.4.1. Style B, C, and D trousers shall use type I, class 1, style 4, 27-ligne of A-A-59994 glossy finish for the front closure. Unless otherwise specified in the contract or order (see 6.2), the color of the buttons shall be a good match to the basic fabric.

3.5.10 Labels. Trousers shall have labels in accordance with 3.5.10.1 and 3.5.10.2. The labels shall show fastness to dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

3.5.10.1. Identification-size instruction label. The combination identification-size instruction label shall measure not less than 5-1/2 by 2-1/2 inches and shall conform to MIL-DTL-32075, type VI, classes 1, 2, and 3 (combined) when tested as specified in 4.4.1. The format of the label shall be as follows, and the specific content will be as applicable to the trousers being labeled:

TROUSERS, MEN'S; POLYESTER/WOOL (EXAMPLE)

FIBER CONTENT: XX% POLYESTER/XX% WOOL (EXAMPLE)

SIZE: 36 x 34 (EXAMPLE)

NSN: 8405-01-XXX-XXXX (EXAMPLE)

NAME OF CONTRACTOR:

CONTRACT NO. SPE1C1-00-0000 (EXAMPLE)

DRY CLEAN ONLY

DO NOT USE HOT IRON FOR PRESSING

3.5.10.2 Barcode label. Each pair of trousers shall be individually barcoded with a paper label/tag conforming to MIL DTL 32075, type VIII, class 17 when tested as specified in 4.4.1. The tag shall be attached to the item by a fastener. The barcoding element shall be a 13-digit National Stock Number (NSN) and the appropriate 12-digit Universal Product Code (UPC) assigned to the NSN by the Government. The initials "UPC" shall appear beneath the code. The barcodes for NSN and UPC shall be a medium to high density and shall be located so they are completely visible on the item when the item is folded or packaged as specified herein. The label's location shall cause no damage to the item.

3.5.11 Striping. Materials for scarlet (styles B and C) striping shall be broadcloth conforming to MIL-DTL-29405. Alternatively, finished stripes in accordance with MIL-S-82155 may be used, type I for style B and type II for style C. Gold braid for style D trousers shall conform to class 3 of MIL-DTL-20271. Material for style E stripes shall be formed by placing broadcloth wool stripes in scarlet shade 2501 with a 1/8-inch-wide white broadcloth or white gabardine strip centered between them (see 3.3.3). Stripes for styles B, C, and E may be stiffened with buckram (see 3.5.4) of an appropriate width to the applicable stripe.

3.6 Patterns. Standard patterns will be furnished by the Government (see 6.2). Standard patterns show size and directional lines for cutting, and they are marked or notched for proper placement and assembly of component parts. The standard patterns shall not be altered in any way and shall be used for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns, except that additional notches for use during construction are permitted on the working patterns. When using automatic equipment, minor modifications are also permitted on the working patterns provided the modifications do not alter the dimensional, serviceability, or appearance requirements cited in this document or those governed by the standard pattern. The standard patterns provide a 1/4-inch seam allowance for pocket flaps, a 1/2- to 5/8-inch seam allowance for the crotch seam, and a 3/8-inch seam allowance for all other seams except seat seams and inseam of back part. For the seat seam, the standard patterns provide 7/8 inch (total 1-1/4 inches at the top) to allow for tapering the seat outlet. For the inseam, the standard patterns provide 3/4 inch to the back part (total 1-1/8 inches at top) to allow for tapering the inseam outlet of back parts. Unfinished legs have an allowance of 3 inches for the turnup of the legs in tailoring.

3.6.1 Pattern parts. Component parts shall be cut from the materials specified and in accordance with the number of parts specified in table III. Requirements for cutting component parts that are not included in table III are included in 3.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE III. Pattern parts.

Material	Nomenclature	Type	Cut parts
Basic material	Front	All	2
	Back	All	2
	Right Fly (with integrated tab) 1/	All	1
	Fly Tab 1/	All	2
	Left Fly	All	1 1/
	Side Pocket Wide Facing	I, II, and III	2
	Side Pocket Narrow Facing	I, II, and III	2
	Hip Pocket Bearer	I, III, and IV	4
	Hip Pocket Flap 2/	I, III, and IV	2
	Waistband	All	2
	ID Pocket Facing	III	1
	Belt Loops, Strip	All	1
Lining, interfacing, pocket stays, and pocketing	Right Fly Lining	All	1
	Crotch Lining	All	2
	Side Pocket Stay	I, II, and III	2
	Hip Pocket Flap Lining	I, II, and IV	2
	Left Fly Lining	All	1
	Side Pocket	I, II, and III	2
	Hip Pocket	I, III, and IV	2
	Right ID Pocket	III	1
Buckram, cotton	Waistband Interfacing	All	2

FOOTNOTES:

1/ When the fly tab is used, eliminate the right fly with integrated fly tab and cut right fly from same pattern as the left fly.

2/ When the flaps are self-lined, cut four Hip Pocket Flap pieces and eliminate Hip Pocket Flap Lining pieces (2 pieces cut).

3.7 Construction. Construction of the trousers shall conform to the requirements specified in table IV and manufactured in accordance with 3.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE IV. Construction requirements.

Construction feature	Requirement
Stitch and seam types	ASTM D6193 and 3.8
Stitches per inch	3.8
Thread type and size	Table II
Thread tension	Maintained so that there is no tight, loose, or unbalanced stitching.
Thread shade on outside of trousers	Consistent thread shade on the outside of the trousers. Multiple shades of thread on the outside of the trousers are not allowed.
401 or 101 stitch type	Loops of the chain shall finish on the inside of the trousers.
Seams and seam allowances	Maintained with seam uniformly sewn so that no raw edges, runoffs, twists, pleats, puckers, gathers, other distortions, or open seams result.
Beginning and ending of seams	Start and finish evenly.
Joined components	Lie smooth and flat, unless otherwise specified.
Ends of seams and stitching – 301 stitch type	If not caught in another line of stitching: backstitched not less than 1/4 inch.
	If the end of a continuous line of stitching (except label): overlapped not less than 1/2 inch.
	If label stitching: overlapped not less than 3 stitches.
Thread breaks (all stitch types)	Secured by stitching back of the break not less than 1/2 inch.
	If 401 stitch type, repaired using 301 stitch type.
Buttonholes	Eyelet end, taper-bar type, 5/8 inch cut length, clean cut.
	Well worked over gimp with end securely tacked.
	Bar at the end has a minimum of four tacks, not including the first cross-overstitch.

3.8 Manufacturing operations requirements. The trousers shall be made in accordance with the operation requirements specified in table V. Following the exact sequence of operations as specified is not required provided the finished trousers meet the finished form, fit, and function requirements as those produced by following the sequence of operations as specified in table V. Any additional underpressing to facilitate manufacturing is permissible. Unless otherwise specified (see 6.2), seam allowances shall be as cited in 3.6. Unless otherwise specified (see 6.2), all types and styles shall be in accordance with table V. Some operations are not applicable to specific types or styles that do not have the associated components or features.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations.

No.	Operation	Stitch type	Seam type	Stitches per inch
1.	Cut and shade mark.			
	a. Cut the component parts (see 3.6.1) as indicated on the patterns provided and in the material specified. Additional cutting requirements are provided below for those components not controlled by a furnished pattern piece.			
	b. Cut the material in the direction indicated by directional lines on the patterns. Lay fronts and back so that the directional lines are in the warp direction.			
	c. Cut all component parts for the trousers from the same piece of basic material to ensure a uniform shade throughout the trousers. The following parts may be cut from ends: belt loops, pocket bearers, and facings. When cut from ends, the parts shall be a good match to the shade of the trousers.			
	d. Cut the pockets in accordance with patterns.			
	e. Cut the stripping for the belt loops of sufficient width to comply with the requirements of operation 10.			
	f. For trousers with stripes (styles B, C, D, and E), cut the stripe material in the warp direction in the appropriate length to the outseam length of the trousers being produced.			
	(1) For style B trousers only: Cut one scarlet stripe 4 inches wide per leg.			
	(2) For style C trousers only: Cut one scarlet stripe 3 inches wide per leg.			
	(3) For style D trousers only: Cut one scarlet and gold lace stripe per leg.			
	(4) For style E trousers only: Cut one white stripe 7/8 inch wide and two scarlet stripes 1-1/8 inches wide per leg.			
	g. Cut the crotch lining parts so that, when folded, the fold will be on the bias, and one of the inseam sides is in the warp direction.			
	h. Cut the waistband linings and interfacings on the bias and wide enough to comply with operation 13.			
	i. Cut waistband stabilizer of sufficient length (see operation 13).			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
1. (Cont'd)	j. Mark or ticket the component parts to ensure a uniform shade and size throughout the garment. Ensure the numbering does not show on the outside of the garment and, wherever possible, is covered by the seam allowance. An ink pad numbering machine, rubber stamp, or pencil may be used as long as the markings do not show in the finished item. Ensure the following methods are not used: corrosive metal fastening devices, sew-on shade tickets, and adhesive-type tickets which discolor or adhere to the material upon removal of tickets.			
2.	Replace defective or damaged parts.			
	a. During cutting, replace all parts found to contain defects such as a hole, cut, tear, smash, mend, burn, scorched area, open place, loose yarn, snagged thread, area of poor dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar, or woven in waste.			
	b. Replace any part(s) damaged during the manufacturing process, by needle chews, scissor or knife cuts, tears, holes, mends, burns, or large exposed drill holes.			
3.	Overedge trousers.			
	a. Overedge stitch the inseam of the front and the fly edge of the right front. The overedge stitching of the inseam of the front extends from bottom to fly notch. The overedge stitching of the outseam of the front extends from the bottom notch of the side pocket to the bottom of the leg.	502, 503, or 504	EFd-1	6-10
	b. Overedge stitch inseam and outseam of back part of trousers. The side pocket stay piece with the bottom edge turned up may be attached to the outseam in the overedge operation.	502, 503, or 504	EFd-1	6-10
	c. Overedge stitch crotch seam, seat seam, and raw edge at the left end of the waistband.	502, 503, or 504	EFd-1	6-10
	d. The folded crotch lining may be stitched to the foreparts in a separate operation (see operation 14).	301	SSa-1	6-10
	NOTE: When a knife is used on serging (overedge stitching) machine, the gage is set so that the raveled ends are trimmed but the edge of the fabric is not cut off.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
4.	Set hip pocket bearers (types I, III, and IV). Finished appearance: the hip pocket bearer is properly positioned, uniformly and securely sewn with stitching of uniform gage and without pleats, puckers, or other distortions.			
	a. The hip pocket bearer is a single ply of basic material.			
	b. Position the bearer on the pocketing material in accordance with notches as indicated by marks on pattern.			
	c. Fold under the lower raw edge of the hip pocket bearer uniformly 1/4 to 3/8 inch and stitch to the pocket 1/16 to 1/8 inch from the folded edge. When bearer is cut on the selvage, the edge need not be turned under.	301	LSbl-1 or LSbj-1 (selvage)	10-16
5.	Set side pocket bearers and facings (types I, II, and III). Finished appearance: the side pocket bearer and facing are properly positioned and securely sewn with stitching of uniform gage and without pleats, puckers, or other distortions.			
	a. The side pocket bearer and facing are each a single piece of basic material.			
	b. Position the bearer and facing on the pocket material in accordance with notches as indicated by marks on the pattern.			
	c. Fold under the front raw edge of bearer and facing 1/4 to 3/8 inch and stitch to the pocket 1/8 inch from the folded edge. Continue stitching across the bottom raw edge. A selvage edge need not be turned.	301	LSd-1 and LSj-1	10-16
6.	Make hip pocket flaps (types I, III, and IV). Finished appearance: the hip pocket flap finishes smooth and flat, without twists, pleats, or puckers, and shall be uniform in shape and size in accordance with patterns. The lining is not exposed on the outside. The edges of the flap are forced out and the edge stitching is uniform in width. The buttonhole is correctly positioned, clean cut, and well made, and the stitching is securely caught in the basic material.			
	a. Make the flap for the hip pocket of one ply of basic material and one ply of lining material. As an alternate, the flap may be self-lined.			
	b. Stitch the two plies of material together 3/16 to 1/4 inch from the side and bottom edges. Evenly trim the edges for proper turning when necessary.	301 or 401	SSe-2(a)	10-16
	c. Turn the flap, working out the seamed edges, corners, and point completely. Edgestitch the seamed edges of the flap uniformly 1/16 to 3/32 inch from the seamed edges, working the lining or underply back from the finished edge of the flaps. The lining underply is not exposed on the outside.	301	SSe-2(b)	10-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
6. (Cont'd)	d. Make a vertical, eyelet-end, taper-bar buttonhole cut 5/8 inch long through the center of the flap with the edge of the eyelet 1/2 to 5/8 inch above the center point. The buttonhole is well worked over the gimp to fit a 22-ligne button with the ends of the buttonhole securely tacked. The purling of the buttonhole is on the outside of the flap.	Buttonhole		52-54 per buttonhole including bartack
	e. The finished hip pocket flap measures 5-1/4±1/8 inches across the top.			
7.	Make left fly. Finished appearance: the left fly finishes smooth and flat without twists, puckering, or distortion. The overedge stitching is securely caught in the fabric.			
	a. Position slide fastener on left fly and left fly interfacing with bottom end of chain 1/4 to 1/2 inch above the fly notch. The front edge of the chain is 1/2 to 5/8 inch from the front edge of the finished fly at the top, tapering from 1/4 to 3/8 inch at the bottom. Stitch slide fastener tape to the fly through the interfacing with a double row of stitches 3/16 to 1/4 inch gage.	301 or 401	LSbj-2	12-16
	b. Overedge stitch the back edge of left fly and left fly interfacing together.	503 or 504	SSa-1	6-10
NOTE: Only operation 8A or 8B is performed on each pair of trousers, not both.				
8A.	Make right fly (with separate button tab). Finished appearance: the right fly shall finish without bulkiness, twists, puckers, or pleats.			
	a. The fly consists of one ply of basic material and lining.			
	b. Alternate: Position the fly tab on the outside of the fly, with raw edges even and the upper finished edge of the tab 1/2 inch below the top edge of the fly.	301	SSa-1	10-16
	c. Center the bottom edge of the right fly on the right fly lining in line with the fly lining notch; center the upper front edges of the fly and fly lining even and stitch the right fly and right fly lining together 3/16 to 1/4 inch from the front edge, following the contour of the right fly. The seam extends from the bottom end of the fly to the upper edge of the fly. Any excess lining may be trimmed.	301 or 401	SSe-2(a)	10-16
	d. In the finished trousers, the upper end of the lining extends to the top of the waistband and over the waistband lining. The lining extension piece at the lower end extends not less than 1/2 inch beyond inseam. When the option to use a separate fly tab is exercised, the waistband lining may extend to the right end of the waistband over the right fly lining.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
8A. (Cont'd)	e. Make a 5/8-inch-long, horizontal, eyelet-end, taper-bar buttonhole, 3/8 inch below and horizontal with the waistband seam 1/2 inch in from edge of right fly piece. The buttonhole is well worked over the gimp to fit a 22-ligne button. The purling is on the underside of the fly.	Buttonhole		52-54 per buttonhole (including tack)
8B.	Make right fly (with integrated button tab). Finished appearance: the right fly finishes without bulkiness, twists, puckers, or pleats.			
	a. Stitch the two plies of the alternate fly tab together along the pointed end front and bottom edges with a 3/16- to 1/4-inch seam.	301	SSe2-(a)	10-16
	b. Evenly trim the edges for proper turning.			
	c. Turn the tab, working out the seamed edges, corners, and point completely. Edgestitch the tab uniformly 1/16 to 1/8 inch from the seamed edges.	301	SSe-2(b)	10-16
	d. Make a 5/8-inch-long, horizontal, eyelet-end, taper-bar buttonhole through the center of the tab with the inside edge of the eyelet 1/2 to 5/8 inch from the finished pointed end of the tab. The buttonhole is well worked over gimp to fit a 22-ligne button. The purling is on the inner side of the tab.	Buttonhole		52-54 per buttonhole (including tack)
9.	Assemble right and left flies. Finished appearance: the flies are of even length where they join at the crotch seam. The fastener parts are set so there is not twisting or puckering when the fly is closed.			
	Position flies with notches at lower end, matching seam slide fastener tape to back edge of right fly, stitching 1/4 inch from edge. When 301 stitch is used, the edge of the right fly is serged.	301 or 503 or 504	SSa-1	12-16
10.	Make belt loops (see operation 1.e). Finished appearance: the belt loops are flat without distortions or raw edges and with stitching of uniform gage. The loops are uniform in length and width.			
	a. Perform one of the following operations to fold and join the edges before performing operation 10.b:			
	(1) Fold the stripping lengthwise toward the center, abutting the raw edges. Join the abutted edges with a combination covering stitch on the underside and a row of stitches uniformly 1/16 inch from the folded edges of the stripping. The stripping finished 5/16 to 3/8 inch wide.	406	EFh-1	10-16
	(2) Fold the stripping lengthwise, turning the raw edges and abutting the turned-under edges at the center. Join the abutted edges with a covering stitch.	105	EFae-1	10-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
10. (Cont'd)	(3) Turn under one side of the stripping. Fold the stripping lengthwise, overlapping the turned under edge on the raw edge at the center. Join the lapped edges with a covering stitch.	105	--	10-16
	b. Cut appropriate number of belt loops (see 3.3).			
11A.	Make stripes (styles B and C). Finished appearance: The scarlet stripes shall be basted without distortions and the finished stripe shall be uniformly 2 inches wide for style B trousers and 1-1/2 inches wide for style C trousers. If buckram is used to stiffen the stripes, it shall not be visible at the sides of the stripes in the finished trousers.			
	a. If buckram is used to stiffen the stripes, center the strip on the back of the stripe before folding the raw edges.	101		4-6
	b. Fold the raw edges of the stripes so that they abut each other at the center back of the finished stripes and baste along the folded edges.			
11B.	Make stripes (style D). Finished appearance: the stripes for style D trousers shall be basted without distortions and the finished stripe shall be uniformly 1-1/4 inches wide.			
11C.	Make stripes (style E). Finished appearance: the stripes for style E trousers shall be basted without distortions and the finished stripe shall be uniformly 1-5/8 inches wide. If buckram is used to stiffen the stripes, center the strip on the back of the stripe before folding the raw edges.			
	a. The stripe shall be made of two strips of scarlet material, each cut 1-1/8 inches wide and one strip of white material 7/8 inch wide. If buckram is used to stiffen the stripes, center the strip on the back of the stripe before folding the raw edges.			
	b. Fold the raw edges of the scarlet stripes to the center back, abutting the raw edges. Baste along the folded edges.	101		4-6
	c. Fold the white stripe in half lengthwise and stitch together 1/16 inch from the folded edge, forming a corded edge.	301	OSf-1	10-14
	d. Position the two scarlet stripes on each side of the corded white stripe with one folded edge of each scarlet strip abutted against the corded edge. Stitch each inner edge of the scarlet strip to the white stripe 1/16 inch from the folded edge.	301	SSat-2	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
12.	Make ID pocket (type III trousers only). Finished appearance: the ID pocket bearer and identification pocket halves shall be properly positioned and securely sewn without pleats, puckers, or other distortions (see figure 6).			
	a. The ID pocket shall be made of two pieces of pocketing material and a facing consisting of one ply of basic material			
	b. Position the bearer over one ply of pocket material with the upper edges even. Turn under the lower edge of bearer and seam to the pocket 1/8 inch from the folded edge. A selvage edge need not be turned.	301	LSd-1	12-16
	c. Properly position front and back pieces of the pocket with edges even and join together at the side and bottom edges with a 1/4-inch seam. The stitching shall extend from notch to notch at upper side edges.	301	SSe-2 (a)	12-16
	d. Turn the pocket, forcing out the seamed edges. Topstitch the pocket uniformly 1/4 inch from the seamed edges.	301	SSe-2 (b)	12-16
13.	Make and join waistband lining. Finished appearance: The waistband lining measures not less than 2 inches wide in the finished trousers. The waistband linings may be pieced provided the seam finishes flat and there is not more than one piecing on each pair of trousers. The waistband stabilizer may be 1 inch shorter than the waistband lining at the seat seam. In the finished trousers, the waistband lining is not exposed beyond the top edge of the waistband.			
	a. The waistband lining-interfacing assembly consists of any one of the lining materials specified in 3.5.3 and one ply of interfacing cotton buckram cloth specified in 3.5.4.			
	b. Overlap the lining on the buckram interfacing 1 inch (see operation 1.i) and stitch 1/8 to 3/16 inch from edge of lining.	301, 401, or 101	LSa-1	6-10
	c. Position stabilizer on waistband interfacing assembly with one edge of stabilizer and free edge of interfacing even. Stitch stabilizer to waistband interfacing assembly 1/2 inch from edge.	301	---	6-10
	NOTE: A commercial waistband lining/interfacing conforming to specified requirements may be used.			
	NOTE: The waistband interfacing may be fused if all requirements of the waistband are maintained.			
14.	Seam crotch lining to fronts (see operation 3.d).			
	Fold crotch lining lengthwise to form a double thickness and attach to fronts.	301 or 503 or 504	SSa-1 EFd-1	6-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
15.	Seam darts in back. Finished appearance: the darts are properly positioned and finished without pleats, puckers, gathers, or other distortions. In the finished trousers, the darts shall be well tapered to a flat point and the tapered end shall finish within the hip pocket (types I, III, and IV). In type II trousers, the darts end where indicated on the patterns.			
	a. Fold the backs, matching the cut edge of the waist darts. Stitch lengthwise along the entire length of the darts, starting 3/8 inch from the cut edges at the top end and tapering to a point at the lower end as indicated by marks on the pattern.	301	SSa-1	12-16
	b. Spread open and press darts smooth and flat with a heated pressing iron or pressing machine.			
16.	Attach hip pocket, flaps, and label. Finished appearance: the pockets finish smooth and flat without bulkiness, bulges, or other distortions on the outside of the finished trousers. The stitching shall be uniform and secure. The pocket opening and flaps shall be in proper alignment. The pockets are 5-3/4 to 6-1/4 inches deep when measured on the inside of the pocket from top edge of welt facing to bottom. The finished pocket opening (after bartacking) does not exceed the hip pocket flap. The pocket flaps are 2-1/4±1/4 inches at the center measured from seam to center point.			
	a. Position pocket flaps on the outside of the back in line with the mark as indicated by the pattern with the pocketing on the underside. Stitch through all plies 3/16 to 1/4 inch from the mark.	301	LSq-2(a)	12-16
	b. Position the hip pocket welt on the outside of trousers in line with the mark and stitch through all plies 3/16 to 1/4 inch from the mark.	301	SSe-2(a)	12-16
	c. Cut pocket opening through the back and pocket, simultaneously. The opening does not extend beyond the ends of the flap. Turn the welt piece through the opening and raise stitch, forming a 1/8- to 3/16-inch welt at lower edge pocket opening.	301	SSe-2(b) (shows finished seam)	12-16
	d. Turn under the lower raw edge of welt facing and seam pocketing 1/16 to 1/8 inch from folded edge. When welt facing is cut on the selvage, the edge does not need to be turned under.	301	LSd-1 or LSbj-1 (selvage)	10-16
	e. Turn the pocketing wrong side out, matching notches with pocket opening, and stitch sides 3/16 to 1/4 inch from raw edges. The stitching may extend across the bottom folded edge.	301 or 401	SSae-2(a)	12-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
16. (Cont'd)	f. Turn pocketing, forcing out corners and seamed edges. Fold and stitch the pocket 1/4 to 3/8 inch from the side edges. Continue to stitch along the bottom edges. The stitching may extend across the bottom folded edge.	301 or 401	SSae-2(b)	12-16
	g. As an alternate, fold pocketing with side raw edge turned to the inside 3/8±1/16 inch and stitch down sides and across the bottom, 1/8±1/16 inch from the pocket edges.	301	SSc-1 and OSf-1	12-16
	h. Turn flap down and raise stitch through all plies, 1/16 inch from joining seam, closing top of pocket.	301	LSq-2(b)	12-16
	i. For types I, III, and IV trousers, operation 16.i or 16.j may be used. Type II trousers follow operation 16.j. Position the combination identification, instruction, and size label on the top of the right pocketing so that on the finished trousers it will face the wearer. No part of the label printing is covered by the waistband interfacing curtain. Stitch the label on all four sides 1/16 to 3/32 inch from edges. Stitching is not through the printing.	301	LSbj-2	10-16
	j. As an alternate to 16.i, stitch top edge of the combination identification, instruction, and size label to the lower edge of the waistband lining above the right hip pocket. Each end of stitching is tacked or extends at least 1/2 inch beyond each side of the label.	301	LSa-1	12-16
	k. Securely bartack each end of the pocket opening through all plies of material.	301	SSa-1	12-16
	l. Operations 5.c and 16.a through 16.c may be done on an automatic machine, which sets the flap, stitches, cuts, and turns welt facing in one operation. When this machine is used, the bearer may be trimmed to permit insertion into the machine and the recommended pocket stay material may be used.	301	----	12-16
	m. Raise stitch the joining seam of the lower edge of the pocket opening through back of trousers and welt facing only. Raise stitch the back at the upper edge of pocket opening through all plies, closing the top of the pocket. Securely tack both ends of the pocket opening.	301	----	12-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
17.	Join fly assembly to fronts. Finished appearance: The seam joining the fly assembly to the fronts shall be without pleats, puckers, twists, or other distortions.			
	a. Position left fly assembly on outside of left front with edges even and notches matching. Join left fly to front with 1/4-inch seam.	301	SSe-2(a)	12-16
	b. Raise stitch the joining seam on left fly assembly 1/16 inch from the seam, catching all plies of the seam.	301	LSq-2(b)	12-16
	c. Position the right fly assembly on right front with edges even and notches matching. Join right fly to front with a 1/4-inch seam.	301	LSq-2(b)	12-16
18.	Attach side pockets. Finished appearance: the edges of the pocket opening shall finish smooth, flat, and without distortion. Pocket openings are uniform in appearance. The bottom front corners of the pockets are backstitched.			
	a. Position the outside of the fronts on the facing of the side pocket in accordance with the notches for the pocket openings as indicated by marks on the pattern.			
	b. Seam front, facing, and pocket material together from notch to notch 3/8 inch from the edge of the front.	301	SSe-2(a)	12-16
	c. Cut the depth of the notches for the pocket opening to the seam. Raise stitch the joining seam on the pocket facing and pocket 1/16 inch from seam, catching all plies of the seam. Care shall be taken to avoid notching the pockets on the underside beyond the width of the side seam outlet.	301	LSq-2(b)	12-16
	d. Turn the pocket to the inside of the front so that the seam will finish on the inside of the pocket 1/8 inch back from the finished edge of the pocket opening.			
	e. Topstitch the front from notch to notch, through all plies of the material, 1/4 inch from the finished edge of the pocket opening.	301	SSe-2(b)	12-16
	f. Fold pocket inside out and seam the raw edges of the pocketing 3/16 to 1/4 inch from edge. Notch pockets and bearers at top of step and turn.	301	SSae-2	12-16
	g. Tack each end of the pocket opening to the facing with a 1/4- to 3/8-inch tack. The right and left pocket openings are not out of alignment by more than 1/2 inch.	301	SSa-1	12-16
	h. In the finished trousers, the top of the pocket shall extend into the waistband and be caught in the bottom stitching of the waistband.			
	i. The finished pocket opening (after bartacking) shall measure 5-3/4 to 6-1/2 inches.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
19.	Join outseams. Finished appearance: Outseams are carefully joined with notches matching, and are without twists, puckers, or pleats. The seams start and finish evenly and lie smooth and flat.			
	a. Join the outseam with a 3/8 inch seam, matching the notches as indicated by marks on the patterns, joining the back pocket bearer to the front at the side seam, and catching the side pocket stay with its bottom end turned (if not previously caught in the overedge stitching of operation 3.b.)	301 or 401	SSa-1	12-16
	b. Spread open the outseams from the top edge of the trousers to the bottom and press smooth and flat with a heated pressing machine, with the pocket stay folded and pressed flat over the open seam.			
20.	Finish side pockets.			
	Turn under the back edge of the side pocket and position in line with the folded edge of the stay piece and stitch pocket to stay piece 1/4 to 3/8 inch from edge along the side seam allowance. Continue stitching along the side-seamed edge of the pocket to the folded edge of the pocket and securely backstitch of stitching.	301	SSc-1 and SSc-2(b)	12-16
21.	Attach stripes (styles B, C, D, and E). Finished appearance: Stripes shall be set on the trousers from top edge of fronts to bottom edge of legs, with the top end to finish in the waistband seam. The stripes shall be securely and uniformly stitched, properly positioned, and finish without distortion.			
	Position the stripes on fronts, with back edge of stripes aligned with outseam and edge of pocket opening. Seam to trousers from top of fronts to lower end of pocket opening 1/8 inch from each edge of stripes. Continue stitching from lower end of pocket opening, gradually working stripes toward the back to center over the outseams.	301	SSas-4 (b)	12-16
22.	Attach waistband and set belt loops. Finished appearance: the finished waistband measures 1-3/4±1/8 inches wide. The belt loops are positioned as follows: • One loop centered on each front panel. • One on each side, aligned with the outseam on the back. • One centered between each outseam and seat seam as indicated by the mark on the pattern. • One on the seat seam (see operations 34.c and d). • One additional loop is located to the right of the fly seam, on the right front on waist sizes 38 and above.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
22. (Cont'd)	a. The waistband shall be made of one ply of basic material. Stitch right and left waistbands to trousers with a 3/8-inch seam, catching the ends of the belt loops (except the center back loop; see operation 34.c and d).	301	SSa-1	12-16
	b. Trim ends of belt loops to a length of not more than 1/8 inch.			
	c. Spread open waistband seam and press smooth and flat with a heated iron or pressing machine.			
	NOTE: The waistband lining may be attached to ID pocket (see operation 13) prior to setting the trousers.			
23.	Join lining to waistband.			
	a. Turn back right fly lining and stitch top end to front and top edges of the waistband.	301	SSe-2(a) each edge	12-16
	b. Turn back the end of the left waistband in line with the joining seam of the left fly front and stitch across the top edge of the waistband the width of the fly.	301	SSa-1	12-16
	c. Insert top edge of waistband between lining and buckram waistband interfacing with edge of lining turned in and join all plies with a row of imitation hand felled stitches.			
	d. The left end of the waistband lining shall finish at the front edge of the trousers, with the end of the waistband lining trimmed slightly back from the front edge at an angle. The right end of the waistband lining shall extend approximately 1 inch under the fly lining in the finished trousers.			
24.	Press waistband.			
	Turn out front end of the left and right waistband, forcing out the corners. Turn the waistband lining to the inside and press along the top edge of the waistband. The trousers' waistband lining is not exposed beyond the top edge of the waistband.			
25.	Attach hooks and eyes (styles A and E only). Finished appearance: in the finished trousers, the closure does not bulge, pucker, or twist when the hook and eye is engaged.			
	a. Position the hook at the center (1/4 inch off center tolerance) of the left waistband with the rolled edge of the hook aligned with the slide fastener scoops. Attach the hook to the left waistband through a reinforcement made of self-fabric or pocketing fabric.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
25. (Cont'd)	b. Position the eye at the center of the right waistband aligned with the slide fastener scoops and corresponding with hook and left waistband. Attach the eye to the right waistband through a reinforcement made of self-fabric or pocketing fabric.			
26.	Stitch pocket to lower edge of waistband.			
	Stitch top end of all pockets to waistband seam allowance with pockets properly positioned and smoothed out.	301 or 101	SSa-1	12-16
27.	Finish right and left fly. Finished appearance: the top corners of the right and left flies are completely forced out and not bulky. The stitching of the left fly is uniformly stitched from the edge of the fly. The seam joining the left fly to the front is not exposed on the outside. The flies are smooth and flat without twists, puckers, or excessive fullness.			
	a. Stitch down the left fly with the waistband lining smoothly inserted between the fly and trouser. The stitching is 1-3/8±1/8 inches from the front edge of the fly, extending from the top of the waistband and curving to fly notch.	301	SSa-1	12-16
	b. Continue the stitching of the right fly lining to the top of the waistband.	301 or 401	SSe-2(a)	12-16
	c. Turn the right fly lining to the inside and stitch 1/16 to 1/8 inch from the front edge. Continue the stitching along the front end of the waistband, across the top of the waistband, and down to meet the back of the right fly.	301	SSc-2(b) (shows finished seam)	12-16
	d. Turn under the raw edge of the fly lining and raise stitch the fly joining seam, catching the turned-under portion of the lining and slide fastener tape in the stitching.	301	LSq-2(b)	12-16
	e. Alternate extended waistband lining: turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge. Continue to stitch down front end of waistband, across the top of the waistband, and down to meet the back of the right fly. Turn in raw edge of the fly lining and raise stitch the fly joining seam catching the fly lining in the stitching.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
28.	Join inseam. Finished appearance: Inseams are carefully joined with notches matching and are without twists or puckers. The seams start and finish evenly and are smooth and flat.			
	a. Join the inseam from the bottom edge of the legs to the crotch with the notches matching as indicated by marks on the pattern, forming an outlet, tapering the seam allowance of the back from 7/8 inch at the crotch to 3/8 inch at the knee notch.	301 or 401	SSbd-1 (above knee notch) and SSa-1 (below knee notch)	12-16
	b. Spread open inseam and press smooth and flat with a heated pressing iron or pressing matching.			
29.	Join crotch and seat seam. Finished appearance: the crotch and seat seams are joined with a stitch tension of sufficient elasticity to meet the strain of sitting and stooping. The waist is measured before joining the crotch and seat seam to ensure correct waist size. In the finished trousers, the inseams meet, and the right and left waistband joining seams are aligned. The base of the right fly covers the left fly on the outside. The inseam at the crotch shall not stagger more than 3/8 inch.			
	a. Join the crotch and seat seams from the base of the fly through the curve in the crotch with a 1/4-inch seam, then taper to the end of the waistband lining with a double needle seat seamer with the rows of stitching 1/64 to 1/32 inch apart. The seams from the waistband joining seam to the end of the waistband lining shall be perpendicular to the waistband joining seam.	401	SSe-2 or SSc-2	8-10 each needle
	b. Spread open the crotch and seat seams and press smooth and flat with a heated pressing iron or machine.			
30.	Finish waistband.			
	Topstitch the spread open waistband seam 1/16 inch below the joining seam, catching the waistband lining (with ends of the center back folded in) and the top pockets in the stitching. The stitching shall not extend across the fly.	301	LSbd-2 (shows finished seam)	12-16
31.	Assemble fasteners (if preassembled slide fasteners are not used).			
	Attach slider and, with the ends of the slide fastener chain even, securely staple the bottom end of the chain together.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
32.	Press seams. Finished appearance: the seams shall finish smooth and flat without pleats, puckers, or twists.			
	Spread the seat and crotch seams open from the top of the waistband to the fly notch and press smooth and flat with a heated pressing iron or pressing machine.			
33.	Stitch right fly extension. Finished appearance: in the finished trousers, the right fly lining extension shall finish not less than 1/2 inch beyond the juncture point of the right and left inseam.			
	Turn the raw edges and end of the right fly lining extension and machine stitch or hand fell to each side of the open crotch seat seam, catching the turned under end in the stitching.	301 or hand	SSac-3(b), SSac-3I, and SSac-3(d)	12-16 6-8
34.	Finish attaching belt loops. Finished appearance: all belt loop openings shall measure 2±1/8 inches from bartacking of loop to folded edge. The tacking shall extend the width of the loops, but not beyond. All loops shall be vertically straight. The center back loop shall be centered on the waistband and seat seams.			
	a. Position the belt loops flat against the trousers with the underside of loops facing up. Securely stitch or bartack loops to trousers 1/4 to 5/16 inch below the waistband trouser seam. The tacking is not visible in the finished trousers.	301, bartack, or automatic loop tacker	SSa-1	12-16 21-28 per bartack 24 to 28 per bartack
	b. Turn under the top end of the loops and align the folded top end of the loops with the top edge of the waistband. Securely stitch or bartack the belt loops 1/8 inch below the top folded end of the loops at the top of the waistband, with the turned under portion in the stitching. The stitching or bartack extends the width of the loops.	301, bartack, or automatic loop tacker	LSd-1	12-16 21-28 per bartack 24 to 28 per bartack
	c. Position the back loop over the seat seam, with the right side of the loop against the trousers and with one end of the loop positioned 5/8 to 3/4 inch from the top end of the waistband. Stitch or bartack across the loop 1/8 to 3/16 inch from the raw end of the loop.	301 or bartack	LSq-2(a)	12-16 28-32 per bartack
	d. As an alternate to operation 34.a, the top of the belt loops may be positioned on the top of the waistband so that the folded edge of each belt loop after bartacking is even with the top edge of the waistband. Securely tack or bartack the belt loop, then fold the belt loop down toward the bottom of the waistband, folding the end of the loop up.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
34. (Cont'd)	e. Securely bartack the belt loop at the folded edge 1/4 to 5/16 inch from the bottom edge of the waistband. The tack or bartack is across the belt loop. On the finished belt loop, only the bottom tack or bartack is visible.			
	NOTE: As an alternate, the automatic belt loop tacker may be used on all belt loops.			
35.	Bartack trousers. Finished appearance: the trousers are not distorted by the bartacks. The pockets lie smooth and flat. The bartacks are properly positioned and correctly placed to reinforce the points of strain as specified. Bartacks shall be 3/8 to 1/2 inch long and stitched through all plies of the material at the point of the bartacking.			
	a. Bartack both ends of all the pocket openings. Bartacks for the back pockets are vertical. Bartacks for the side pockets are horizontal.	Bartack	---	21-28 per bartack
	b. Bartack the bottom end of the fly horizontally through all plies above the juncture of the crotch seam and fly. The bartack shall not extend beyond the crotch seam.	Bartack	---	21-28 per bartack
	c. Bartack the inside front edge of the right fly to the back of the left fly with a vertical bartack, with the lower end of the bartack approximately 1/2 inch above the horizontal bartack at the base of the fly.	Bartack	---	21-28 per bartack
36.	Mark and sew buttons. Finished appearance: the buttons are securely sewn and properly aligned with the buttonholes. Hand-sewn buttons are shank wrapped three times, and the thread is securely tacked with not less than two stitches. Machine sewn buttons, which are automatically shanked, have a minimum of ten wraps with three locking stitches. Shank wrapping is optional on machine-sewn buttons.			
	a. For types I, III, and IV: sew a 22-ligne button on each hip pocket through the top ply of the pocketing to correspond with the buttonhole in the pocket flap.	301, 101, or hand		14-16 per button or 4 double per button not including shank wrapping
	b. Sew a 22-ligne button on the left waistband lining to correspond with the right fly buttonhole. The stitching shall not be visible on the outside of the trousers.	301, 101, or hand		14-16 per button or 4 double per button not including shank wrapping 7 minimum, 1 deep set per button

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE V. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
36. (Cont'd)	c. For styles B, C, and D: Sew six 27-ligne buttons on the inside of the waistband lining only. One button shall be positioned over each of the side seams, one on each front, 4-1/2 to 4-3/4 inches from the side seam, and one on each back, 2-1/4 to 2-3/8 inches from the back seam. The center of the buttons shall be positioned 1/2 to 5/8 inch below the top of the waistband.	301, 101, or hand		20-22 per button 14-16 per button 4 per button (double thread)
	d. For styles B, C, and D: Sew a 22-ligne button on the right end of the waistband through all plies to correspond with the buttonhole on the left end of the waistband.	301, 101, or hand		14-16 per button or 4 double per button not including shank wrapping 7 minimum, 1 deep set per button
37.	Press trousers. Finished appearance: all pressing is done with a heated pressing iron or pressing machine to obtain the desired appearance in accordance with good manufacturing practice.			
	a. Press the top, fly, pockets, and pocket flaps smooth and flat.			
	b. Press smooth and crease the legs in the center with the seams matching at the bottom and in the crotch or the inseam in the crotch may be slightly back of the outseam.			
	c. Close flies, waistband, and pockets.			
38.	Finish trouser bottom.			
	Overedge stitch or pink all trouser bottoms.			
39.	Clean trousers.			
	Trim all ends of stitching and remove all loose threads, spots, stains, and shade tickets or markings without injury to the material.			
	NOTE: The barcode label/tag shall be located so that it is completely visible on the item.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

3.9 Finished dimensions. The finished trousers shall conform to the measurements in table VI and table VII as defined in table VIII.

TABLE VI. Finished measurements (inches).


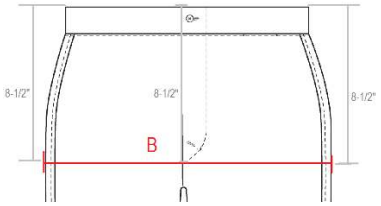
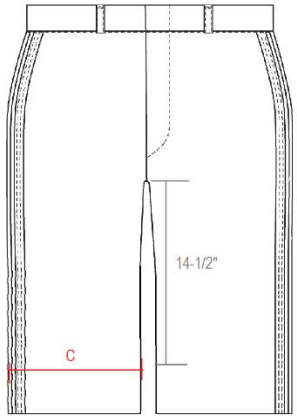
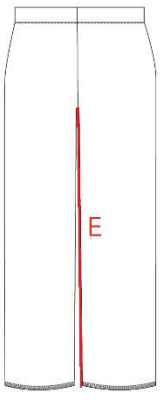
Size	Waist (A) (all lengths)	Hip (B) (all lengths)	Knee (C)		Bottom (D)	
			Lengths 32 and 34	Lengths 36, 38, and 40	Lengths 32 and 34	Lengths 36, 38, and 40
26	26	35	18-1/2	19	17-1/2	18
27	27	36	18-1/2	19	17-1/2	18
28	28	37	19	19-1/2	18	18-1/2
29	29	38	19	19-1/2	18	18-1/2
30	30	39	19-1/2	20	18-1/2	19
31	31	40	19-1/2	20	18-1/2	19
32	32	41	20	20-1/2	19	19-1/2
33	33	42	20	20-1/2	19	19-1/2
34	34	43	20-1/2	21	19-1/2	20
35	35	44	20-1/2	21	19-1/2	20
36	36	45	2-1/2	21	19-1/2	20
37	37	46	20-1/2	21	19-1/2	20
38	38	47	21	21-1/2	20	20-1/2
39	39	48	21	21-1/2	20	20-1/2
40	40	49	21	21-1/2	20	20-1/2
41	41	50	21	21-1/2	20	20-1/2
42	42	51	21-1/2	22	20-1/2	21
43	43	52	21-1/2	22	20-1/2	21
44	44	53	21-1/2	22	20-1/2	21
45	45	54	21-1/2	22	20-1/2	21
46	46	55	22	22-1/2	21	21-1/2
Tolerance	+3/4, -1/2	+3/4, -1/2	±1/2	±1/2	±1/2	±1/2

TABLE VII. Unhemmed inseam measurements (inches).

Length	Inseam
32	34-1/2 to 35-1/2
34	36-1/2 to 37-1/2
36	38-1/2 to 39-1/2
38	40-1/2 to 41-1/2
40	42-1/2 to 43-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE VIII. Methods of measure.

Letter	Measurement	Method	Guidance
A	Waist	Twice the measurement taken across the top edge of the waistband from folded edge to folded edge.	
B	Hip	Measurement taken across the front of the trousers, 8-1/2 inches down from the top of the waistband when laid flat on a table.	
C	Knee	Measurements taken across trouser leg at the following measurements below the crotch seam: 12-1/2 inches for inseam length 32 13-1/2 inches for inseam length 34 14-1/2 inches for inseam length 36 15-1/2 inches for inseam length 38 16-1/2 inches for inseam length 40	 NOTE: 36" inseam used in example
D	Bottom	Taken along (unhemmed) bottom edge of leg from folded edge to folded edge.	
E	Inseam	Taken along inseam from the crotch seam to unhemmed bottom edge.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. Each finished pair of trousers shall conform to the quality of product established by this document. Defects shall not exceed the established maximum Acceptance Quality Limit (AQL), as specified (see 6.2), and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.1.1 Inspection conditions. Unless otherwise specified in this specification or applicable contract or procurements documents (see 6.2), all inspections shall be performed in accordance with this specification and all the requirements of referenced documents.

4.2 First article inspection. First article inspection shall be performed on the trousers when a first article sample is required (see 3.1.1). This inspection shall include the examinations and tests of 4.4.1 through 4.4.4 for compliance with design, configuration, workmanship, dimensional requirements, and testing as specified in this document.

4.2.1 First article samples and acceptance criteria. The first article sample size shall be as specified (see 6.2). The sample unit shall be one pair of finished trousers. The lot size shall be expressed in units of trousers. The presence of defects exceeding specified AQLs (see 3.10 and 6.2) or failure of any testing (see 6.2), shall be cause for rejection of the first article.

4.3 Conformance inspection. Unless otherwise specified in the contract (see 6.2), conformance inspection, in accordance with 3.1.2, shall consist of the examinations and tests of 4.4.1 through 4.4.4.

4.3.1 Component and material sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), sampling shall be in accordance with table IX. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document (see 6.2).

TABLE IX. Material sampling.

Lot size	Sample size (sample units)
800 or fewer	2
801 through 22,000	3
22,001 and over	5

4.3.2 End item sampling and acceptance criteria. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed for dress/semi-dress (D/S) trousers in accordance with the provisions of MIL-STD-1488. The sample shall be one pair of finished trousers. The lot size shall be expressed in units of trousers. The presence of excessive defects or failure of any testing as specified (see 6.2) shall be cause for rejection of the lot.

4.4 Inspection methods.

4.4.1 Component and material examinations and tests. In accordance with 4.1, components and materials shall be examined and tested as specified in table X, unless otherwise excluded, amended, or modified in this document or as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

TABLE X. Component and material verification.

Material/component	Requirement	Verification
Basic material	3.5.2	
Class 1	3.5.2	MIL-DTL-10176
Class 2	3.5.2	MIL-DTL-10176
Class 3	3.5.2	MIL-DTL-10176
Class 4	3.5.2	MIL-DTL-21115
Class 5	3.5.2	MIL-DTL-29405
Class 6	3.5.2	NCTRF PD 87052 MC/PD 08-12 SYSCOM
Lining, interfacing, pocket stays and pocketing	3.5.3	A-A-52106
Buckram	3.5.4	A-A-59992
Waistband stabilizer	3.5.5	A-A-59992
Slide fastener	3.5.6	A-A-55634
Hook and eye	3.5.7	Visual (see 6.7)
Threads	3.5.8	Per specific thread specification listed in table II
Thread, shade	3.5.8	Visual 1/
Buttons	3.5.9	A-A-59994
Button, shade	3.5.9	Visual
Label	3.5.10.1 and 3.5.10.2	MIL-DTL-32075
Striping	3.5.11	Per specific specification listed in 3.5.11

FOOTNOTE:

1/ Results recorded as pass or fail.

4.4.2 In-process examination. Visual and dimensional examinations shall be made at any point during the manufacturing process to determine whether construction details, which cannot be examined in the finished product, are in accordance with the requirements specified in section 3. Materials and components that contain defects and damages, as defined in the visual examination of 4.4.3, shall be removed from production. Any in-process nonconformance remaining in the finished trousers shall be classified as a defect in accordance with the visual examination of 4.4.3.

4.4.3 Visual examination. Sampling and visual examination of the end item for defects in color, design, materials, construction, workmanship, and marking shall be performed in accordance with the provisions for D/S trousers of MIL-STD-1488.

4.4.3.1 Additional defects. The end items shall be examined for the following labeling defects, which are not listed in MIL-STD-1488. These defects shall be scored as minor.

a. Bar code omitted or not readable by scanner.

b. Human readable interpretation (HRI) omitted or illegible.

4.4.4 Dimensional examination. The trousers shall be examined for conformance to the dimensions specified in table VI and table VII, when measured in accordance with table VIII, in accordance with the provisions of MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are intended to be worn by male personnel of the United States Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. NSNs.
c. Types, classes, styles, waist sizes, and lengths required (see 1.2).
d. When first article is required (see 3.1.1).
e. When conformance inspection is required (see 3.1.2 and 4.3).
f. The color of the slide fastener tape, if other than specified (see 3.5.6).
g. Thread shade, if other than specified (see 3.5.8).
h. Button color, if other than specified (see 3.5.9).
i. Applicable Government pattern references, with pattern date (see 3.6).
j. Seam allowances, if other than as specified in 3.6 (see 3.8).
k. The operations for all types and styles, if other than as specified in table V (see 3.8).
l. AQLs (see 3.10).
m. Any deviation from the inspection conditions cited in the referenced documents or test methods (see 4.1.1).
n. First article sampling and acceptance criteria (see 4.2.1).
o. Component and material sampling and acceptance criteria (see 4.3.1).
p. End item sampling and acceptance criteria (see 4.3.2).
q. Component and material examination and tests (see 4.4.1).
r. Packaging requirements (see 5.1).

6.3 Information requests. Requests for information such as purchase descriptions, patterns, drawings, and standard shade samples of cloth can be made by completing and submitting the Defense Logistics Agency Troop Support's Clothing and Textile Specification/Drawing/Pattern Request Form online at https://www.dla.mil/TroopSupport/ClothingandTextiles/SpecRequest.aspx. Requests to use equivalent materials or components or to make changes to the pattern should be sent to the contracting officer for approval by the military services.

6.4 Hook and eye suggested sources of supply. A known source for hook and eye fasteners, and associated attaching pieces, that meet the requirements of this specification is listed below:

Snapco Manufacturing Corporation
140 Central Avenue
Hillside, NJ 07205
Phone: 973-282-0300
Fax: 973-282-7627
http://snapcofasteners.com/hookandeye.html
Reference: No. 8 hook and no. 85 eye with associated reinforcement pieces

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

6.5 Hem allowance. An allowance of 3 inches for hemming is included in the inseam length (see 3.9 and table VII).

6.6 Supersession data. This specification supersedes the following specifications:

MIL-DTL-28902C

MIL-DTL-28920C

MIL-T-29452A

MIL-DTL-82163D

6.6.1 Changes from superseded specifications. Table XI summarizes changes made to the type, class, and style designations from the superseded specifications into this specification.

TABLE XI. Changes to type, class, and style designations.

Superseded specification designation	MIL-DTL-32747 designation
MIL-DTL-28902C	Type IV, class 2, style E
MIL-DTL-28920C, type I, style A	Type III, class 3, style B
MIL-DTL-28920C, type I, style B	Type I, class 3, style B
MIL-DTL-28920C, type II, class 1, style A	Type III, class 4, style D
MIL-DTL-28920C, type II, class 1, style B	Type I, class 4, style D
MIL-DTL-28920C, type II, class 2, style A	Type III, class 5, style D
MIL-DTL-28920C, type II, class 2, style B	Type I, class 5, style D
MIL-DTL-28920C, type III, style A	Type III, class 2, style C
MIL-DTL-28920C, type III, style B	Type I, class 2, style C
MIL-T-29452A, class 1	Type I, class 1, style A
MIL-T-29452A, class 2	Type I, class 2, style A
MIL-DTL-82163D, class 1, style A	Type I, class 6, style A
MIL-DTL-82163D, class 1, style B	Type II, class 6, style A


6.7 Certificates of compliance. Certificates of compliance may be accepted in lieu of testing, at the discretion of the contracting agency. Manufacturers are advised to confirm acceptability of certificates of compliance prior to submitting them to address any requirement.

6.8 Subject term (key word) listing.

Enlisted
French fly
Male
Uniform

6.9 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

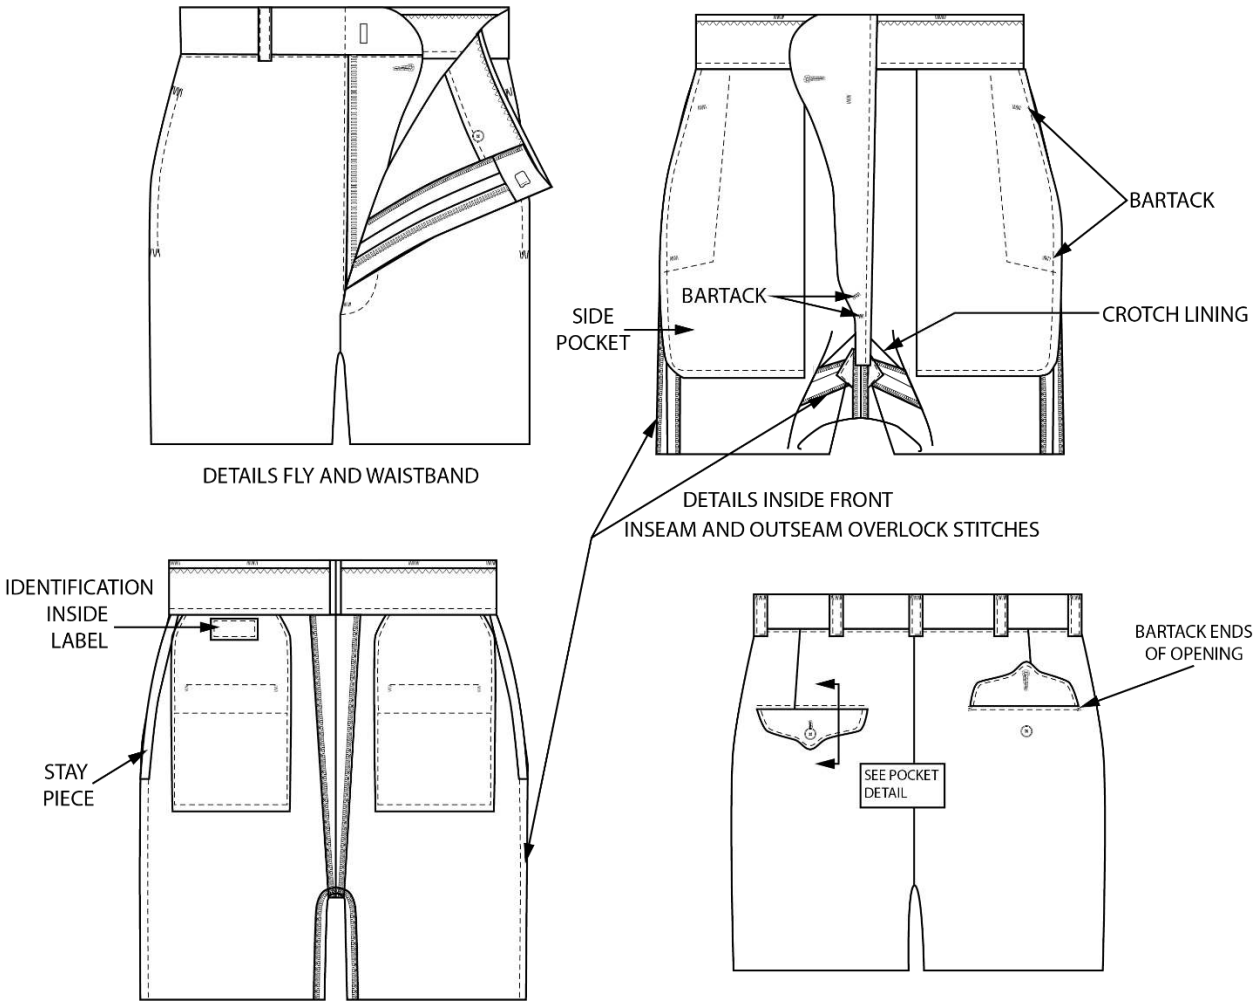

NOTE: Flap-type French fly shown. Tab-type fly is also acceptable.

FIGURE 1. Trousers, type I.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

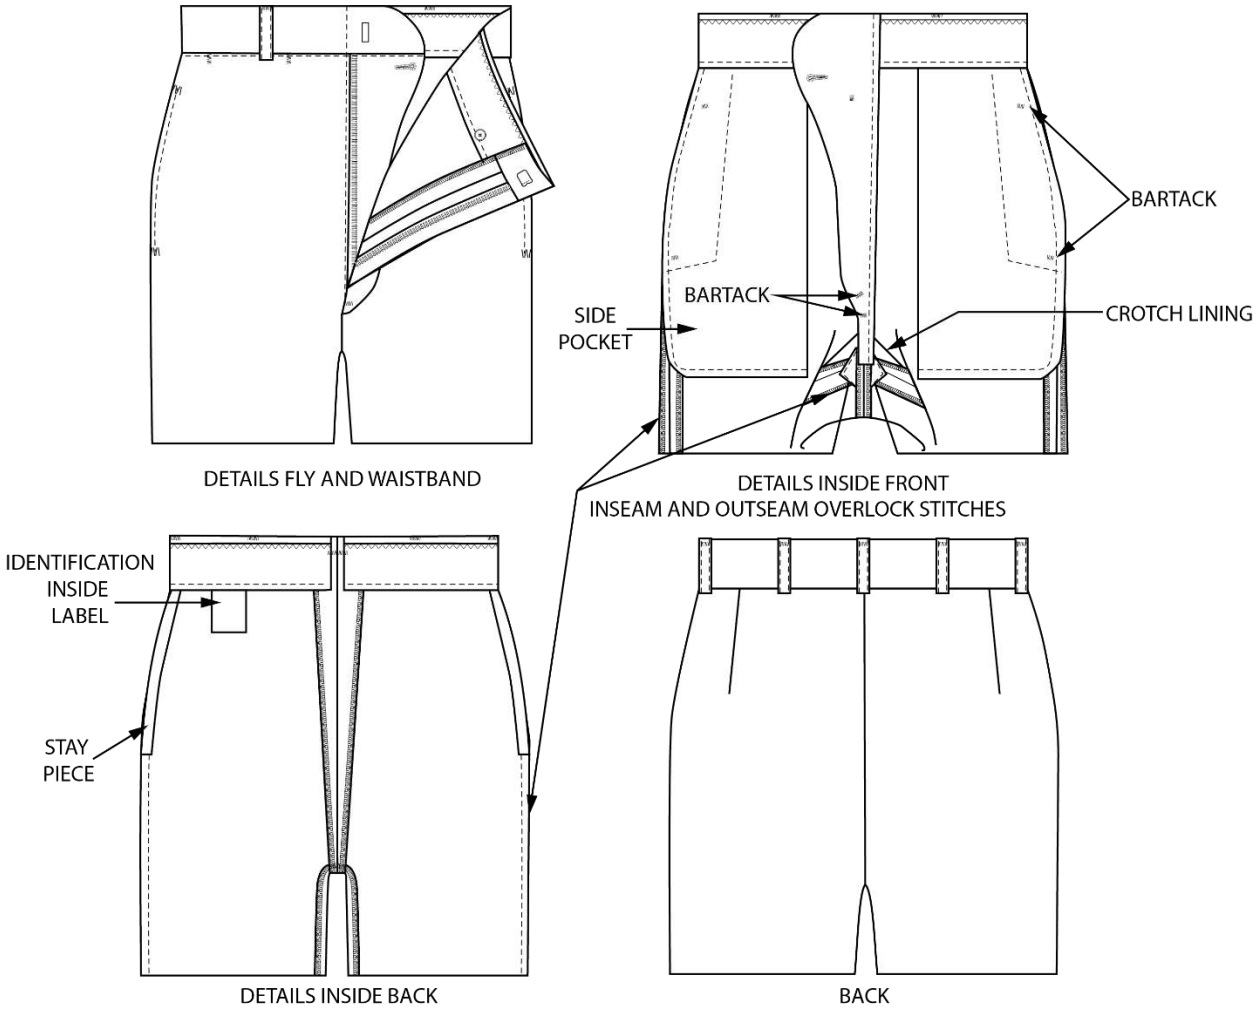

NOTE: Flap-type French fly shown. Tab-type fly is also acceptable.

FIGURE 2. Trousers, type II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

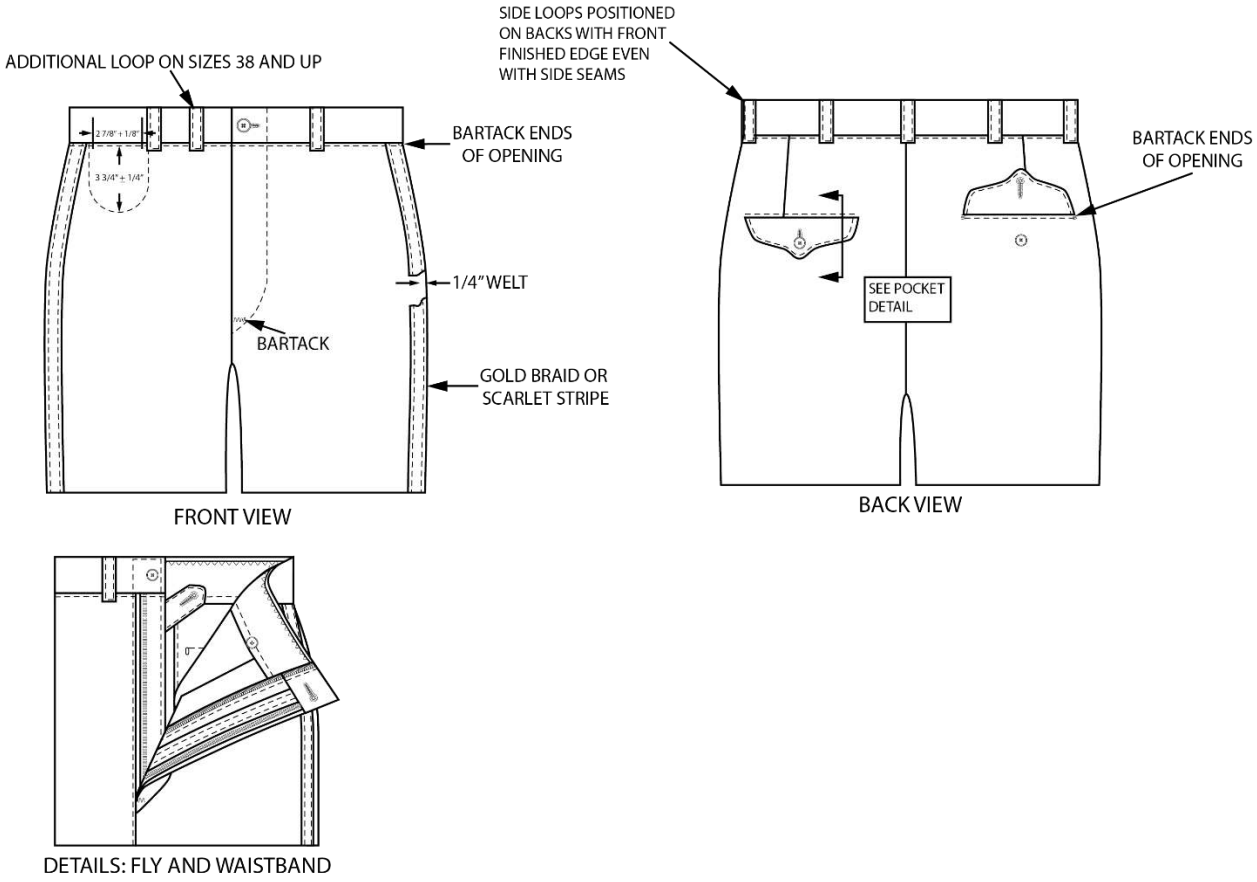

NOTE: Tab-type French fly shown. Flap-type fly is also acceptable.

FIGURE 3. Trousers, type III.

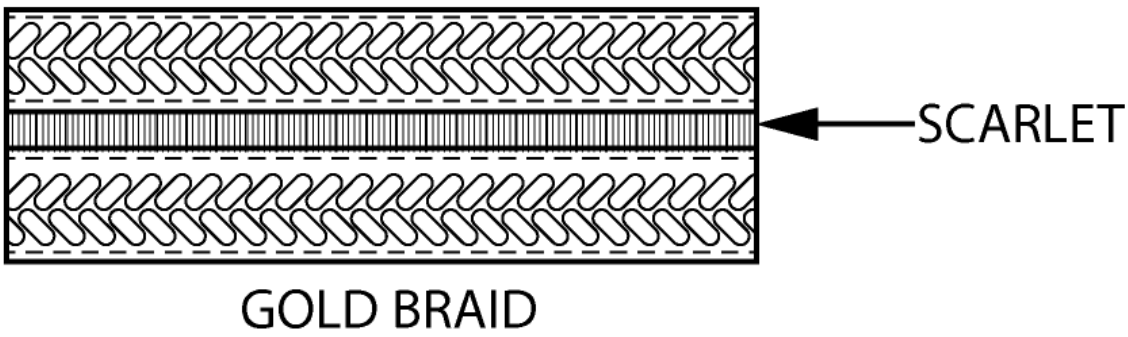


FIGURE 4. Type III trousers ornamental braid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

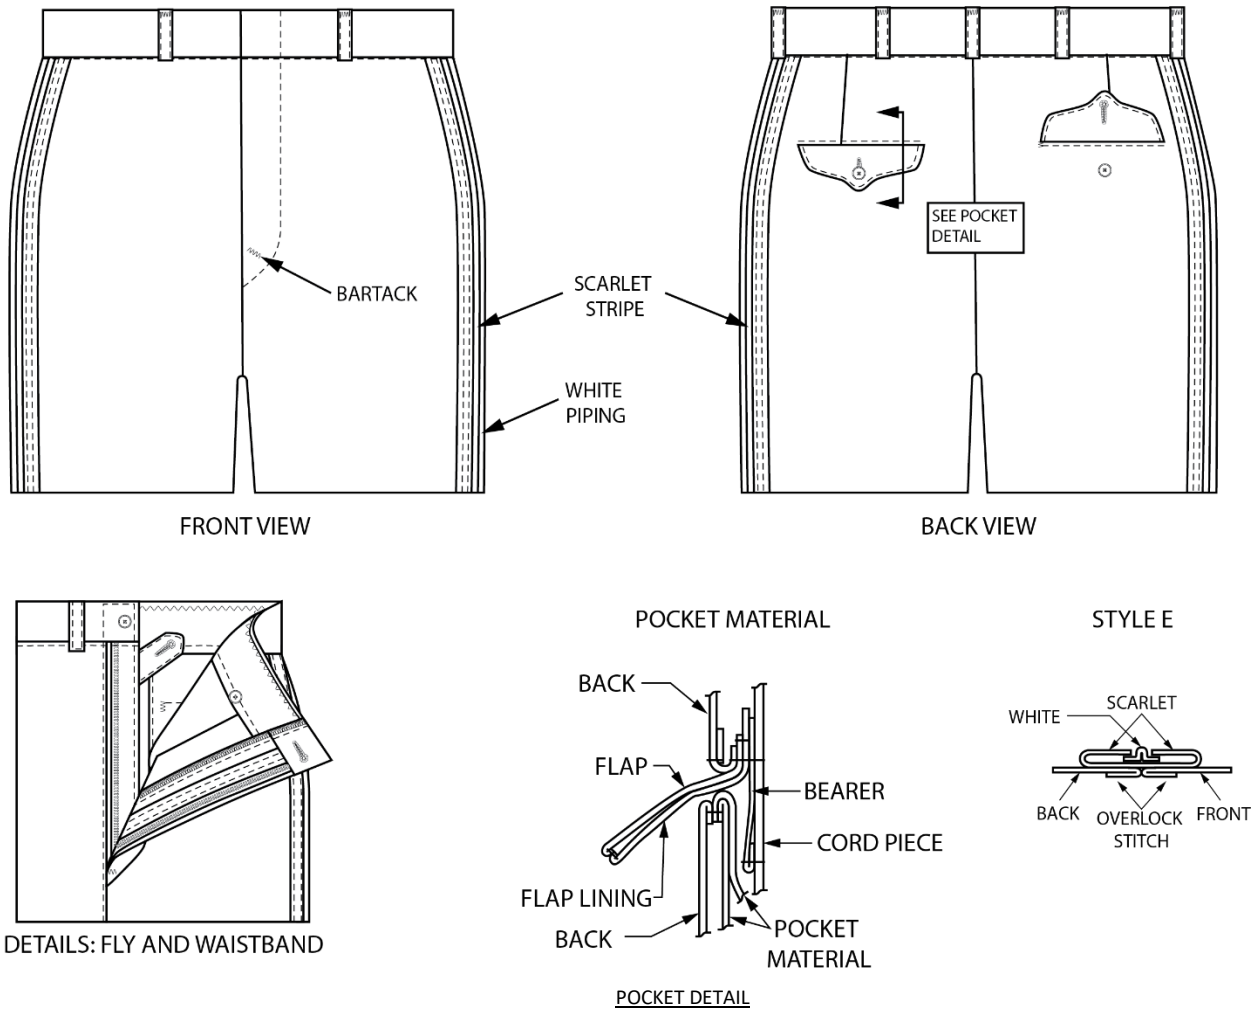


FIGURE 5. Trousers, type IV.

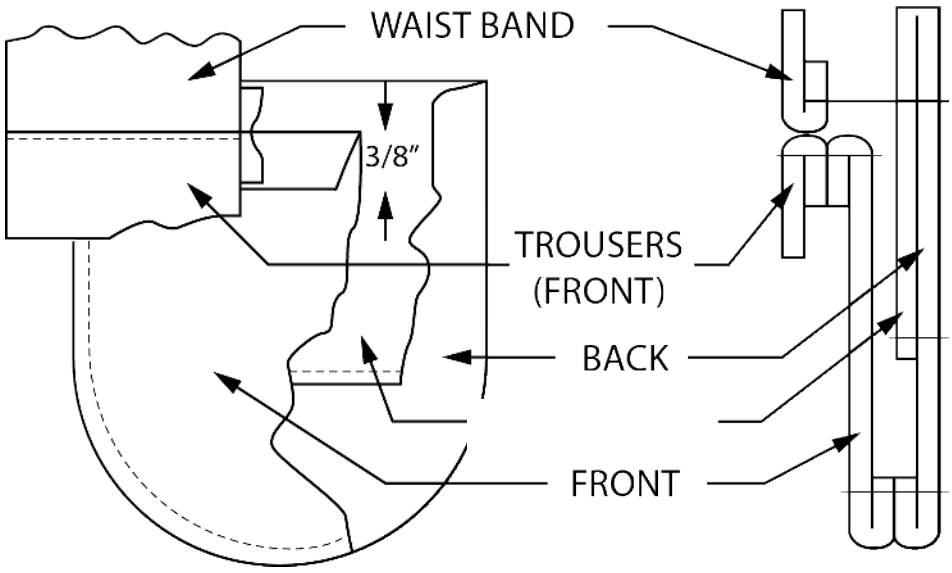


FIGURE 6. Identification pocket (for type III trousers).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

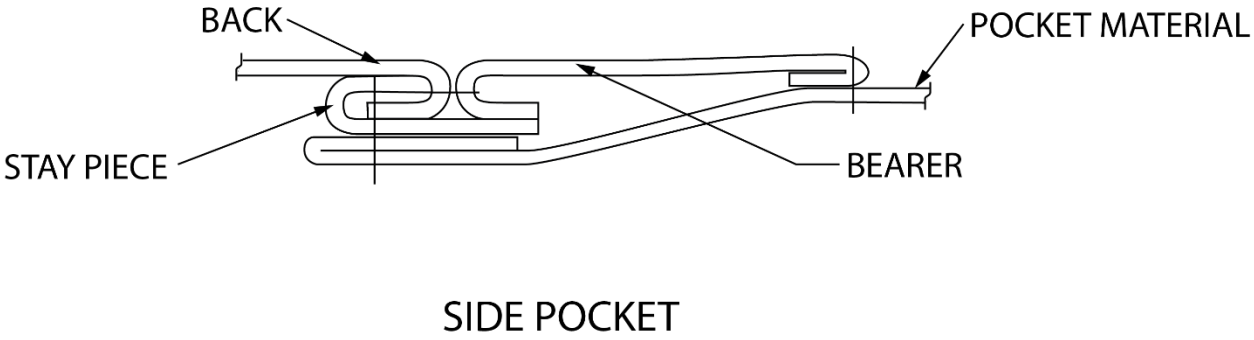


FIGURE 7. Pocket construction.

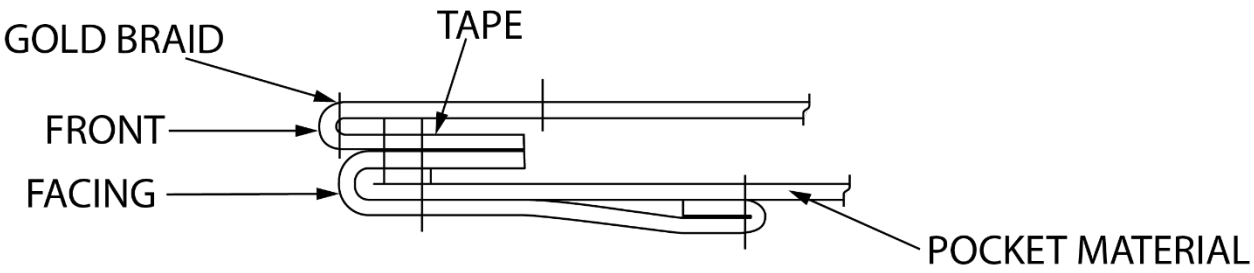


FIGURE 8. Striping attachment, at pocket.

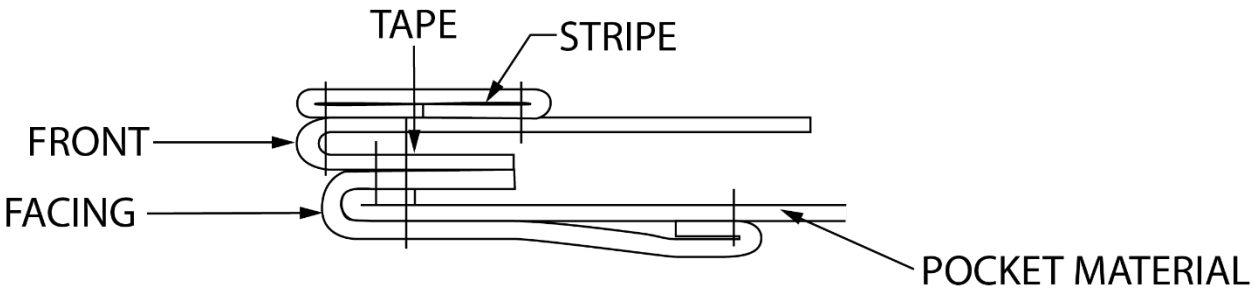


FIGURE 9. Striping attachment, at side seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy – MC
DLA – CT

Preparing activity:
Navy – MC
(Project 8405-2025-006)

Civil agency:
GSA – FAS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:42Z
Check the source to verify that this is the current version before use.