INCH-POUND

MIL-DTL-32761
w/AMENDMENT 1
09 September 2024
MIL-DTL-32761
21 March 2024

DETAIL SPECIFICATION

BAG, LAUNDRY, DUCK

This specification is approved for use by all Departments and Agencies of the Department of Defense (DoD).

1. SCOPE.

1.1 Scope. This specification covers the requirement for one type of duck laundry bag.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 or 4 of this detailed specification. This section does not include documents cited in other sections of this detailed specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 or 4 of this detailed specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to trpsptctstandardiz@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59826 - Thread, Nylon

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-17343 - Rope, Nylon
MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage (General Use)

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of the document to the extent specified herein. Unless otherwise specified, the issue of these documents are those cited in the solicitation or contract.

FEDERAL TRADE COMMISSION

16 CFR Part 303 - Rules and Regulations under the Textile Fiber Products Identification Act

(Copies are available online at https://www.ftc.gov.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at https://www.asq.org)

AEROSPACE INDUSTRIES ASSOCIATION/NATIONAL AEROSPACE STANDARDS (AIA/NAS)

NASM16491 - Grommet, Metallic, General Specification For
NASM20230 - Grommet, Metallic, Plain and Rolled Rim, with Washer, Type I and Type III

(Copies are available online at https://www.aia-aerospace.org.)

PARACHUTE INDUSTRY ASSOCIATION (PIA)

PIA-C-7219 Cloth, Duck, Nylon

(Copies are available online at https://www.pia.com.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample laundry bag shall be subjected to first article inspection in accordance with 4.1.

3.2 Design. The laundry bag shall be cylindrical in shape with metal grommets evenly spaced on the hem of the opening, a drawstring closure, one carry handle on the side wall and the second carry handle on the bottom of the bag. See Figures 1 through 4.

3.2.1 Figures. The figures 1 through 4 are furnished for informational purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.3 Materials.

3.3.1 Cloth, nylon. The nylon cloth shall conform to Type III, Class I of PIA-C-7219. The color shall be natural.

3.3.2 Drawstring**.** The drawstring shall be nylon, 1/4-inch approximate diameter and 8-foot minimum length. The nylon rope shall be seared and knotted at each end. The drawstring shall conform to MIL-PRF-17343**.** The color shall be natural.

3.4 Components.

3.4.1 Grommets. The grommets shall be rolled rim with spur washer and conform to NASM16491 and NASM20230 brass with bright finish, Trade Size 2 or 3.

3.4.2 Thread. The thread shall conform to Type I or II, Class A, Tex 70 of A-A-59826. The color shall approximate the basic material in 3.3.1.

3.4.3 Label. Each bag shall have an identification label conforming to Type III or IV, Class 5 of MIL-DTL-32075. The label shall be located on the body tube near the seam and below the grommets. The label shall not cause any damage to the laundry bag such as a spot, stain or damage due to the location on the item. Each identification label shall bear the inscription below.

BAG, LAUNDRY
(100% NYLON)
NAME OF CONTRACTOR:
CONTRACT NUMBER:
NSN:
LOT NUMBER:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

3.4.4 Bar code label/tag. Each laundry bag shall be individually bar coded with the Type VII, Class 17 label/tag of MIL-DTL-32075. The label/tag shall be legible to Human-Readable Interpretation (HRI) and readable by scanner. The location shall be completely visible on the laundry bag when it is folded and/or packaged and shall not cause damage to the laundry bag. There shall be a 12-digit Universal Product Code (UPC) assigned for all NSNs by the government. The initial "UPC" shall appear beneath the code. The bar codes for the NSN and UPC shall be medium to high density and shall be located so that they are completely visible on the item when it is folded and/or packaged as specified. The label shall not cause any damage to the day shape such as a spot or stain or damage due to the location on the item.

3.5 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.6 Construction.

3.6.1 Stitch, seam, and stitching types. Stitch, seam, and stitching types as specified in Table I shall conform to ASTM D6193. Whenever two or more methods for seams or stitches are given for the same part of the operation, either one may be used. Seams shall be maintained and properly sewn so that no raw edges, runoffs, twists, pleats or open seams will result. When stitch Type 401 is used the chain portion of the stitching shall be on the inside of the bag. The number of stiches per inch shall be 6 to 8. Contractor shall be responsible for seam allowances and shall meet finished dimensions.

3.6.2 Thread breaks, skipped stitches, run-off stitches and end seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be back tacked not less than 1/2-inch. Thread breaks and two or more consecutive skipped or run off stitches shall be overstitched not less than 1/2-inch or more than 1-inch beyond the defective stitching area. Skipped stitches or thread breaks, including 401 stitch type, shall be repaired by using 301 stitch type.

3.6.3 Grommet attachment. There shall be eight grommets attached, each to be centered on the top hem and equally spaced around the circumference of the bag.

3.6.4 Drawstring attachment. The drawstring shall be thread through all grommets. The drawstring shall be finished in accordance with 3.3.2.

3.7 Cutting. All lengthwise pieces shall be cut in the warp direction. Cut all component parts shall be cut in strict accordance with dimensions specified.

3.7.1 Bag, body. The cut dimensions for the body of the bag shall be 53 (± 1/2) inches in the warp direction and 54 (± 1/2) inches in the filling direction.

3.7.2 Bag, bottom. The bottom of the bag shall be a circle. The cut dimension for the bottom of the bag shall be 16-1/2 (minimum) inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

3.7.3 Handles. There shall be two handles, one body handle and one bottom handle. The cut dimensions for both handles shall be 12 (± 1/4) inches in the warp direction and 5 (± 1/4) inches in the filling direction.

3.7.4 Handle alternative. The alternate handle shall have two pieces with dimensions of 12 (± 1/4) inches in the warp direction and 3 (± 1/4) inches in the filling direction.

3.7.5 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and replaced with non-defective components.

3.8 Bag construction. The construction of the laundry bag shall be in accordance with Table I.

TABLE I. Assembly, seam types

Seam Placement	Operation	Seam Type	Stitch Type
Body tube construction (side wall of bag)	Join warp sides to form tube of bag.	LSc-2 or LSbm-3 or LSbm-4	301 or 401 515 or 516 or 517 or 518
Top hem	Turn under twice, forming a three-ply hem 1-7/8 to 2 inches wide.	EFb-1	301
Handle construction	Fold cut piece in half lengthwise. Turn under raw edges and stitch each lengthwise edge.	EFp-2	301 or 401
Alternate handle construction	Turn under the lengthwise raw edges of each cut piece and join by stitching each lengthwise edge.	EFn-2	301 or 401
Attachment of body handle to side wall of bag	The body handle shall be centered over the bag body seam (side wall). Turn under raw edges of each constructed handle. Stitch each end with a crossbox stitch	Crossbox stitch	301

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Assembly, seam types - Continued

Seam Placement	Operation	Seam Type	Stitch Type
Attachment of bag bottom handle to bag body	Bottom handle shall be centered on the bag bottom. Turn under raw edges of each constructed handle. Stitch each end with a crossbox stitch. A reinforcement nylon piece shall be placed on the underside each crossbox stitch. The reinforcement piece shall be sufficient in length and width to cover the crossbox stitch. The reinforcement piece may have raw edges.	Crossbox stitch 2/	301
Attachment of body bag tube to bottom of bag	Stitch together circular bag bottom to bag body tube.	LSc-2 or LSbm-3 or LSbm-4	301 or 401 515 or 516 or 517 or 518

3.9 Performance characteristics. The finished dimensions shall be as listed in Table II. See Figure 1.

TABLE II. Finished dimensions in inches

Location	Finished dimension
A. Length of bag	48 (minimum)
B. Width of bag	25 (minimum)
C. Body handle, top	11 (± 1/4)
D. Body handle, bottom end	20 (± 1/4)
E. Handle opening	6 (± 1/2)
F. Bottom diameter	16 (minimum)
G. Crossbox stitch	1 × 1 (± 1/4)
H. Bottom handle placement	3-1/4 to 4

3.10 Workmanship. The finished laundry bag shall conform to the quality established by this specification. Each finished laundry bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter shall be completely removed. The grommets shall be securely clinched without distortion, cracking, splitting, or cutting of the basic material. The grommets shall not be misaligned or distorted nor contain any corrosion, cut, dent, nick, burr, crack or sharp edge. The occurrence of defects shall not exceed those cited under 4.5 in this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspections requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Conformance inspection (see 4.3)

4.2 First article inspection. A first article, submitted in accordance with 3.1, shall be inspected for compliance with design, construction, and dimensional requirements and tested in accordance with 4.4.1, 4.5 and 4.6.

4.2.1 First article sample. The sample unit shall be one laundry bag, and the lot size shall be expressed in units of laundry bags.

4.3 Conformance inspection. Conformance inspection shall consist of all examinations and tests specified in Section 4.

4.3.1 Conformance sampling. Unless otherwise specified, sampling for inspection shall be performed in accordance with the provisions of ASQ/ANSI Z1.4. The sample unit shall be one laundry bag, and the lot size shall be expressed in units of laundry bags.

4.3.1.1 In-process examination. Visual and dimensional examinations shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with requirements specified in Section 3. Materials and components, which can be classified as having a defect in accordance with Table III, shall be removed from production.

4.3.1.2 Inspection conditions. Unless otherwise specified in this specification, all inspections shall be performed in accordance with the test conditions specified in Section 4 of this document.

4.5.1 Component and material testing. The requirements for the laundry bag shall be tested in accordance with the test methods specified in Table III.

THIS SPACE INTENTIONALLY LEFT BLANK.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE III. End item and component testing

Characteristics	Requirement Paragraph	Requirement	Verification 1/
Cloth, nylon	3.3.1	All	PIA-C-7219
Drawstring	3.3.2	All	MIL-PRF-17343
Grommets	3.4.1	All	NASM 20230
Thread	3.4.2	All	A-A-59826
Label	3.4.3	All	MIL-DTL-32075
Bar code label/tag	3.4.4	All	MIL-DTL-32075

1/ All characteristics cited in end item document shall be tested.

4.5 Visual examination. Each laundry bag selected for visual examination shall be inspected for the defects cite under Table IV.

TABLE IV. End item visual defects

Examination	Defect	Classification	
		Major	Minor
Material	Color not as specified	101	
	Weakening defects; smash or float	102	
	Any hole, needle chew, cut, tear, mend, burn or drill hole	103	
Cleanness	Any spot or stain (outside)		201
Components	Component parts or required operations omitted	104	
	Any component parts not cut in accordance with specification requirements	105	
	Color not as specified	106	
	Incorrect type, fiber	107	
Accuracy of Seams	Seams twisted, puckered or pleated		202
	Part of bag caught in any unrelated operation or stitching	108	
	Ends of all seams or stitching's not caught in other seams or stitching back tacked not less than 1/2-inch		203

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects - Continued

Examination	Defect	Classification	
		Major	Minor
	Ends of a continuous line of stitching overlapped less than 1/2-inch or more than 1 inch beyond defective stitching area		204
	Thread ends not trimmed or loose thread not removed		205
	Thread breaks, 2 or more skipped or run off stitches overstitched less than 1/2-inch		206
Gauge of stitching, stitching margins	Irregular, unevenly gauged, not uniform beyond range specified		207
Open seams or run offs:	Up to 1/4-inch inclusive		208
	More than 1/4-inch	109	
Raw edges (securely caught in seam)	More than 1/4-inch to and including 1 inch		209
	More than 1 inch	110	
Seam and stitch types	Not as specified	111	
	Chain portion of 401 stitch on outside of bag	112	
Stitch tension	Loose tension resulting in loose seam	113	
	Tight tension (stitches break when normal strain is applied to the seam or stitching)	114	
Stitches per inch (score only when condition exists on major portion of the seam)	One stitch less than the minimum or any number in excess of the maximum specified		210
	Two or more stitches less than the minimum specified	115	
Crossbox stitch	One or more missing, loose or misplaced	116	
	Not size specific		211
Carry handles	Missing, misplaced, size not as specified	117	
	Free opening less than 5-1/2 inches or more than 6-1/2 inches		212
Grommets	Color, size and finish not as specified		213
	Washer is not on inside of bag	118	
	Omitted, malformed, damaged or misplaced	119	
	Clinched too tight cuts fabric or insecurely attached		214
	Incorrect size, style or finish not as specified		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects - Continued

Examination	Defect	Classification	
		Major	Minor
Drawstring Rope	Omitted	120	
	Less than 8 feet	121	
	Any end not seared or knotted		215
	Wrong color		216
	Not as specified		217
Marking, Label	Missing, incorrect or illegible	122	
	Misplaced		218
Barcode label	Omitted or illegible to Human-Readable Interpretation (HRI)	123	
	Not readable by scanner	124	
	Not visible on folded, packaged item	125	
	Causes damage to the item	126	
Finished dimensions	Measurement of item not as specified	127	

4.6 End item dimensional examination. The laundry bag selected for dimensional examination shall be examined for the finished dimensions specified in Table II. The bag shall be laid flat when measuring. Any dimension not within the specified tolerance shall be cause for rejection. classified as a defect.

A. Length of bag. The length shall be measured from the top edge of the bag to the bottom of the bag and shall include the bottom seam.

B. Width of bag. The width of the bag shall be measured from folded edge to folded edge at the top opening of the bag.

C. Body handle, top end. The top end of the body handle shall be measured from the top edge of the bag to the top end of the handle.

D. Body handle, bottom end. The bottom end of the body handle shall be measured from the top edge of the bag to the bottom edge of the handle.

E. Handle opening. The handle opening for both the body handle and the bottom bag handle shall be measured between each open end (one end of the open edge to the other side of the open edge).

F. Diameter of bag. The diameter of the bag shall be measured on the bottom of the bag from seam to seam across the middle exclusive of the bottom seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

G. Crossbox stich. The length and width of each crossbox stitch shall be measured.

H. Bottom handle placement. Measure the handle end directly from the body side seam (side wall). The measurement shall be taken from the body side seam to the handle to the edge of the body bag/bottom seam. This measurement shall not include the body bag/bottom seam.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products or by contacting the responsible packaging activity.

6. NOTES.

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The bags are intended for use by the Naval personnel serving aboard ship for storing bedding, linens and clothing to be laundered.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Quantity
c. National Stock Number.
d. Applicable Government drawings, including revisions.
e. When first article is required (see 3.1).
f. Number of first article inspection samples (see 4.2.1).
g. Name and address of the first inspection facility; and the name and address of the Government activity responsible for conducting the first article inspection program.
h. Packaging required (see 5.1).
i. Specific issue of individual documents referenced (see 2.2).
j. Inspection conditions.
k. Conformance inspection and acceptable quality limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

6.3 Information requests. For access to information such as patterns, drawings, standard shade samples of cloth etc. go to Troop Support's website for their Specification/Pattern/Drawing Request form, https://www.dla.mil/troop-support/clothing-and-textiles/industry-support/spec-request/. Complete the request form and then submit. Requests to use equivalent materials and/or components or to make changes to the pattern should be sent to the contracting officer for approval by the military service.

6.4 Subject term (key word) listing.

Duffle bag

6.5 Supersession. This document supersedes MIL-B-21332E and A-A-55176 with NSN 8465-00-616-9576.

6.6 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army–GL
Navy–NU
DLA–CT

Preparing activity:
DLA–CT
(Project number: 8465-2024-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

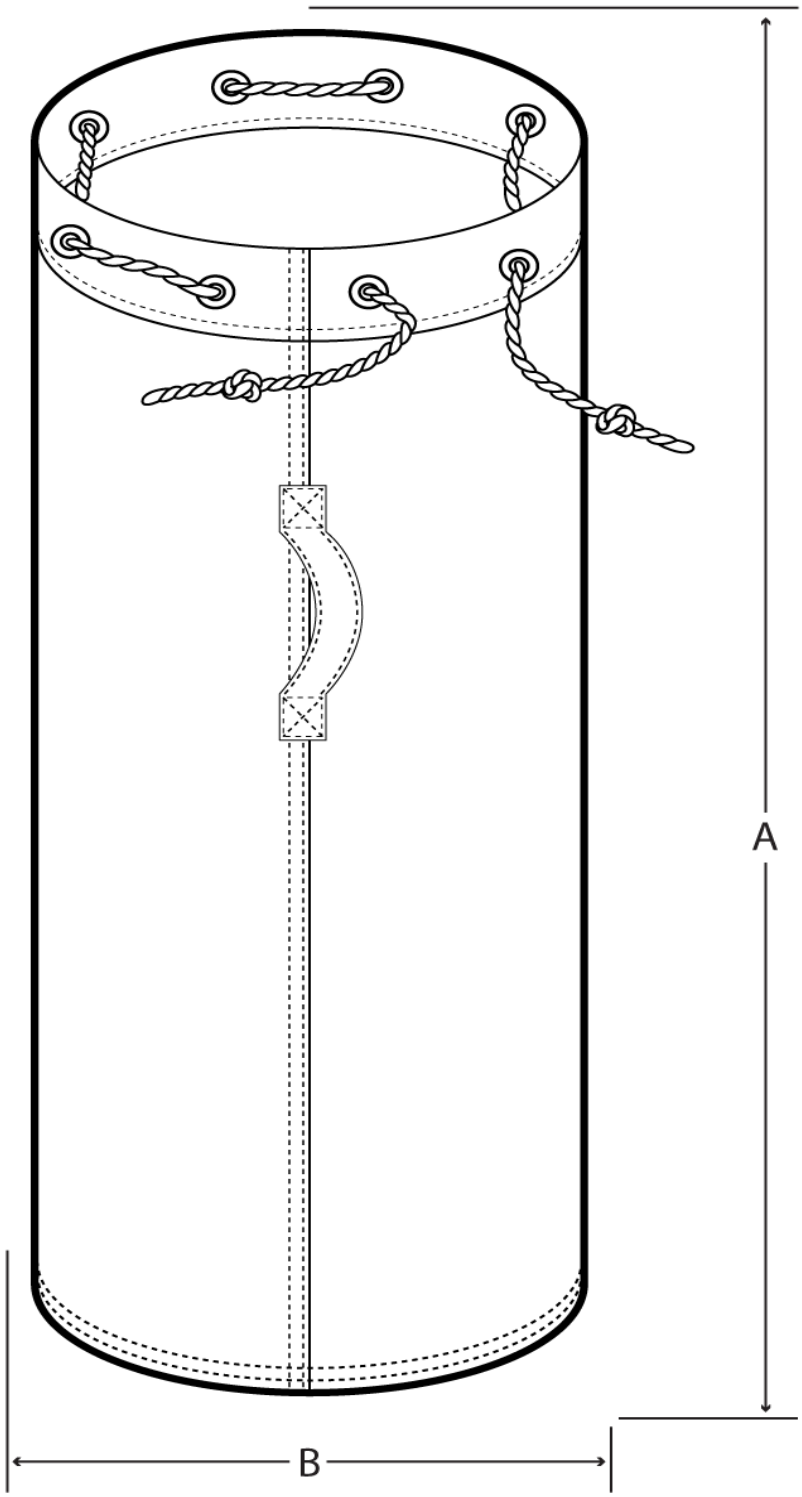


FIGURE 1. Laundry bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

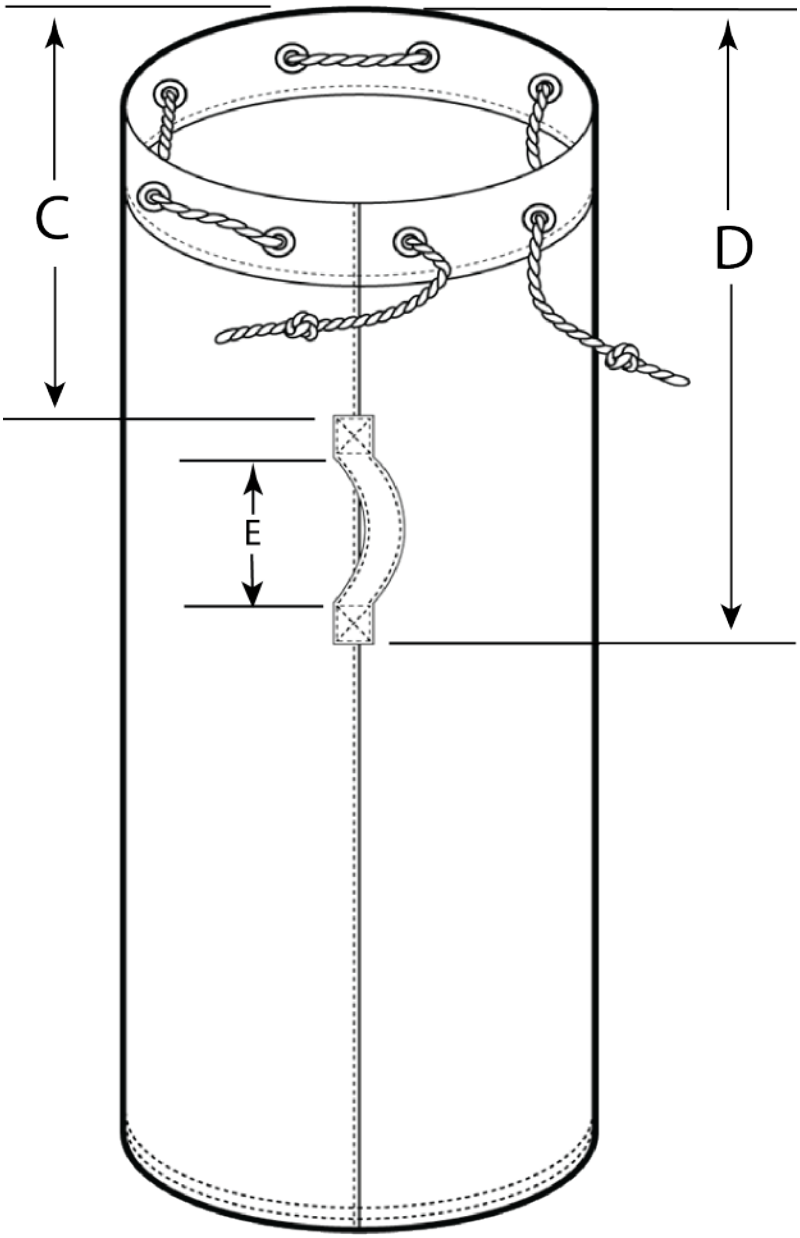


FIGURE 2. Laundry bag, with alternate stitching in the body

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

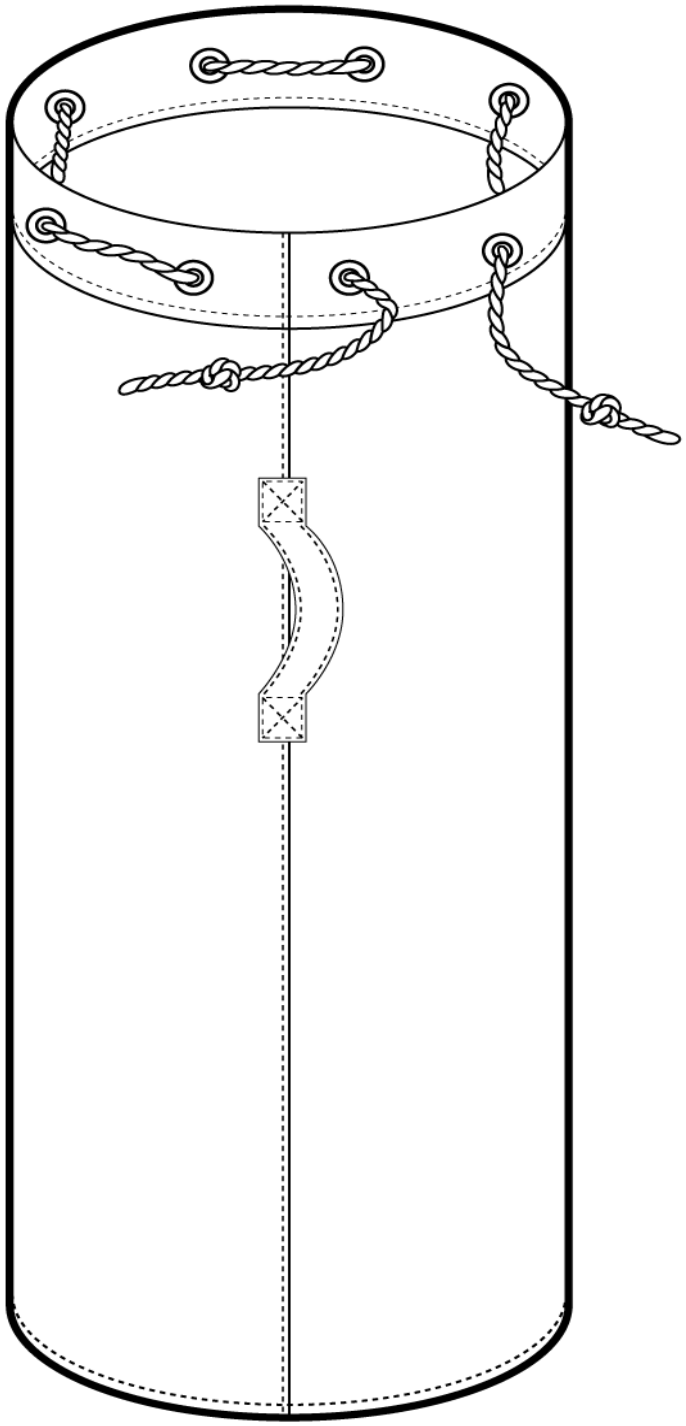


FIGURE 3. Laundry bag, alternate stitching in the body and bottom of the bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

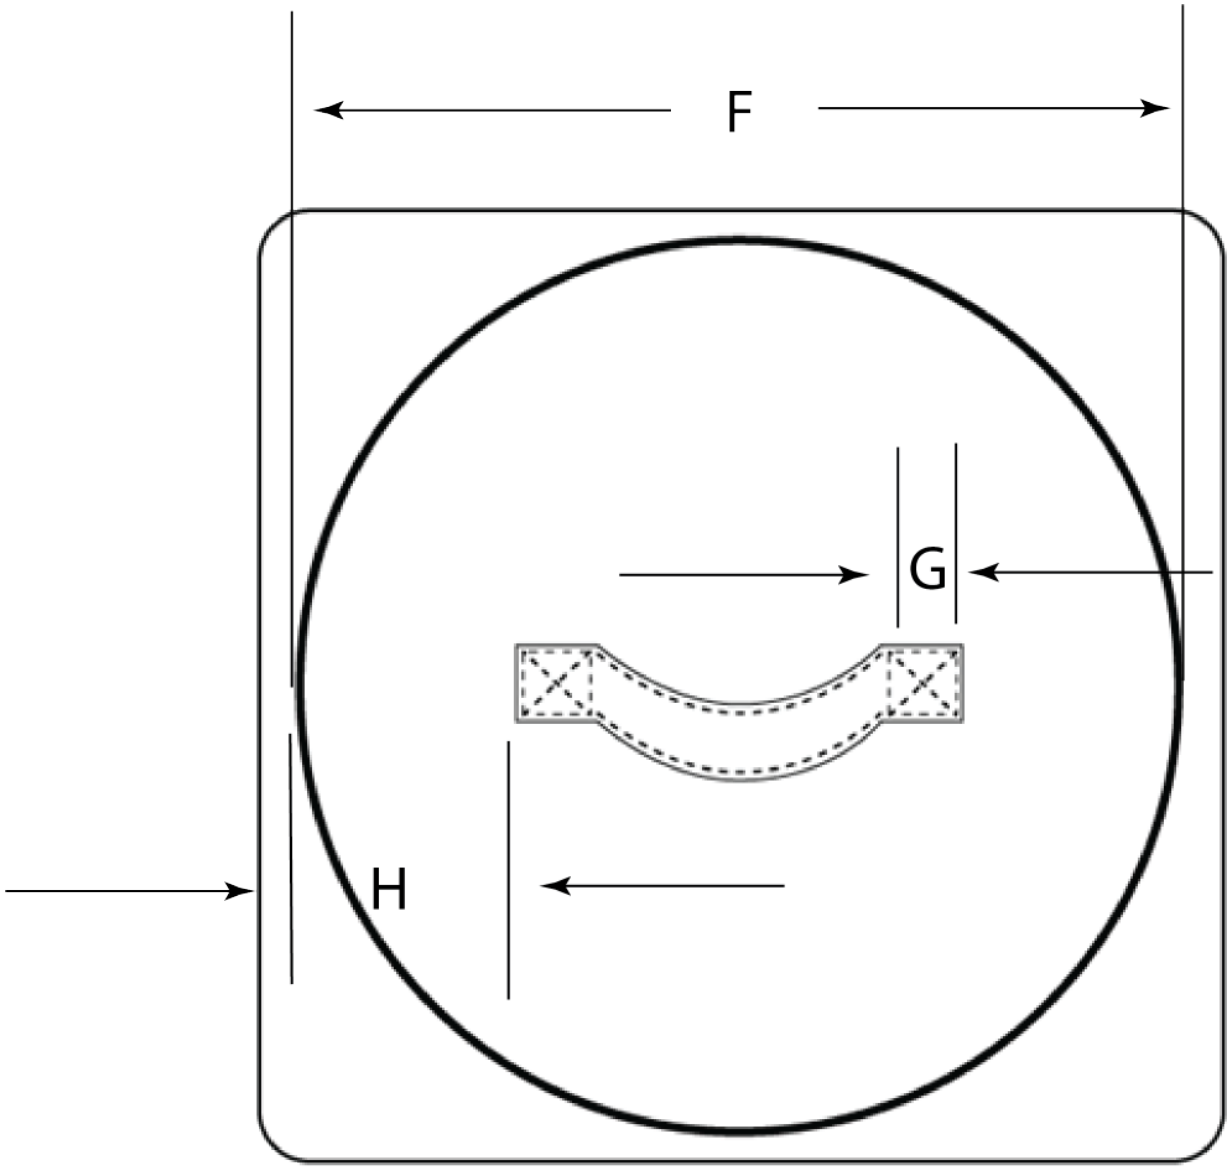


FIGURE 4. Handle placement, bottom of laundry bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.