INCH-POUND

MIL-DTL-32761
21 March 2024

# DETAIL SPECIFICATION

# BAG, LAUNDRY, DUCK

This specification is approved for use by all Departments and Agencies of the Department of Defense (DoD).

## 1. SCOPE.

1.1 Scope. This specification covers the requirement for one type of duck laundry bag.

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 or 4 of this detailed specification. This section does not include documents cited in other sections of this detailed specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 or 4 of this detailed specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to Attn: DLA Troop Support, 700 Robbins Street, Philadelphia, PA 19111-5096. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59826 - Thread, Nylon

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-17343 - Rope, Nylon
MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage (General Use)

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of the document to the extent specified herein. Unless otherwise specified, the issue of these documents are those cited in the solicitation or contract.

FEDERAL TRADE COMMISSION

16 CFR Part 303 - Rules and Regulations under the Textile Fiber Products Identification Act

(Copies are available online at https://www.ftc.gov.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at https://www.asq.org)

AEROSPACE INDUSTRIES ASSOCIATION/NATIONAL AEROSPACE STANDARDS (AIA/NAS)

NASM 16491 - Grommet, Metallic, Plain and Rolled Rim, with Washer, Type I and Type III

(Copies are available online at https://www.aia-aerospace.org.)

PARACHUTE INDUSTRY ASSOCIATION (PIA)

PIA-C-7219 Cloth, Duck, Nylon

(Copies are available online at https://www.pia.com.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample laundry bag shall be subjected to first article inspection in accordance with 4.1.

3.2 Design. The laundry bag shall be cylindrical in shape with metal grommets evenly spaced on the hem of the opening, a drawstring closure, one carry handle on the side wall and the second carry handle on the bottom of the bag. See Figures 1 through 4.

3.2.1 Figures. The figures 1 through 4 are furnished for informational purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.3 Materials.

3.3.1 Cloth, nylon. The nylon cloth shall conform to Type III, Class I of PIA-C-7219. The color shall be natural.

3.3.2 Drawstring**.** The drawstring shall be nylon, ¼ inch approximate diameter and 8-foot minimum length. The nylon rope shall be seared and knotted at each end. The drawstring shall conform to MIL-PRF-17343**.** The color shall be natural.

3.4 Components.

3.4.1 Grommets. The grommets shall be rolled rim with spur washer and conform to NASM 16491, NASM20230 brass with bright finish, Trade Size 2 or 3. The size 2 grommet diameter after insertion shall be 0.375 inches. The size 3 grommet diameter after insertion shall be 0.438 inches.

3.4.2 Thread. The thread shall conform to Type I or II, Class A, Tex 70 of A-A-59826. The color shall approximate the basic material in 3.3.1.

3.4.3 Label. Each bag shall have an identification label conforming to Type III or IV, Class 5 of MIL-DTL-32075. Each identification label shall bear the inscription below.

BAG, LAUNDRY (100% NYLON)
NAME OF CONTRACTOR:
CONTRACT NUMBER:
NSN:
LOT NUMBER:



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

3.4.4 Bar code label/tag. Each laundry bag shall be individually bar coded with the Type VII, Class 17 label/tag of MIL-DTL-32075. The label/tag shall be legible to Human-Readable Interpretation (HRI) and readable by scanner. The location shall be completely visible on the laundry bag when it is folded and/or packaged and shall not cause damage to the laundry bag. There shall be a 12-digit Universal Product Code (UPC) assigned for all NSNs by the government. The initial "UPC" shall appear beneath the code. The bar codes for the NSN and UPC shall be medium to high density and shall be located so that they are completely visible on the item when it is folded and/or packaged as specified. The label shall not cause any damage to the day shape such as a spot or stain or damage due to the location on the item.

3.5 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.6 Construction.

3.6.1 Stitch, seam, and stitching types. Stitch, seam, and stitching types as specified in Table I shall conform to ASTM D6193. Whenever two or more methods for seams or stitches are given for the same part of the operation, either one may be used. Seams shall be maintained and properly sewn so that no raw edges, runoffs, twists, pleats or open seams will result. When stitch Type 401 is used the chain portion of the stitching shall be on the inside of the bag. The number of stiches per inch shall be 6 to 8. Contractor shall be responsible for seam allowances and shall meet finished dimensions.

3.6.2 Thread breaks, skipped stitches, run-off stitches and end seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be back tacked not less than ½ inch. Thread breaks and two or more consecutive skipped or run off stitches shall be overstitched not less than ½ inch or more than 1 inch beyond the defective stitching area. Skipped stitches or thread breaks, including 401 stitch type, shall be repaired by using 301 stitch type.

3.6.3 Grommet attachment. There shall be eight (8) grommets attached, each to be centered on the top hem and equally spaced around the circumference of the bag.

3.6.4 Drawstring attachment. The drawstring shall be thread through all grommets. The drawstring shall be finished in accordance with 3.3.2.

3.7 Cutting. All lengthwise pieces shall be cut in the warp direction. Cut all component parts shall be cut in strict accordance with dimensions specified.

3.7.1 Bag, body. The cut dimensions for the body of the bag shall be 53 (± ½) inches in the warp direction and 54 (± ½) inches in the filling direction.

3.7.2 Bag, bottom. The bottom of the bag shall be a circle. The cut dimension for the bottom of the bag shall be 16 ½ (minimum) inches.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

3.7.3 Handles. There shall be two handles, one body handle and one bottom handle. The cut dimensions for both handles shall be 12 (± ¼) inches in the warp direction and 5 (± ¼) inches in the filling direction.

3.974 Handle alternative. The alternate handle shall have two pieces with dimensions of 12 (± ¼) inches in the warp direction and 3 (± ¼) inches in the filling direction.

3.7.5 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and replaced with non-defective components.

3.8 Bag construction. The construction of the laundry bag shall be in accordance with Table I.

TABLE I. Assembly, seam types

| Seam Placement | Operation | Seam Type | Stitch Type |
|---|---|---|---|
| Body tube construction (side wall of bag) | Join warp sides to form tube of bag. | LSc-2 or<br><br>LSbm-3 or<br>LSbm-4 | 301 or<br>401<br>515 or<br>516 or<br>517 or<br>518 |
| Top hem | Turn under twice, forming a three-ply hem 1-7/8 to 2 inches wide. | EFb-1 | 301 |
| Handle construction | Fold cut piece in half lengthwise. Turn under raw edges and stitch each lengthwise edge. | EFp-2 | 301 or<br>401 |
| Alternate handle construction | Turn under the lengthwise raw edges of each cut piece and join by stitching each lengthwise edge. | EFn-2 | 301 or<br>401 |
| Attachment of body handle to side wall of bag | The body handle shall be centered over the bag body seam (side wall). Turn under raw edges of each constructed handle. Stitch each end with a crossbox stitch | Crossbox stitch | 301 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Assembly, seam types - Continued

| Seam Placement | Operation | Seam Type | Stitch Type |
|---|---|---|---|
| Attachment of bag bottom handle to bag body | Bottom handle shall be centered on the bag bottom. Turn under raw edges of each constructed handle. Stitch each end with a crossbox stitch. A reinforcement nylon piece shall be placed on the underside each crossbox stitch. The reinforcement piece shall be sufficient in length and width to cover the crossbox stitch. The reinforcement piece may have raw edges. | Crossbox stitch 2/ | 301 |
| Attachment of body bag tube to bottom of bag | Stitch together circular bag bottom to bag body tube. | LSc-2 or<br><br>LSbm-3 or<br>LSbm-4 | 301 or<br>401<br>515 or<br>516 or<br>517 or<br>518 |

3.9 Performance characteristics. The finished dimensions shall be as listed in Table II. See Figure 1.

TABLE II. Finished dimensions in inches

| Location | Finished dimension |
|---|---|
| A. Length of bag | 48 (minimum) |
| B. Width of bag | 25 (minimum) |
| C. Body handle, top | 11 (± ¼) |
| D. Body handle, bottom end | 20 (± ¼) |
| E. Handle opening | 6 (± ½) |
| F. Bottom diameter | 16 (minimum) |
| G. Crossbox stitch | 1 x 1 (± ¼) |
| H. Bottom handle placement | 3-1/4 to 4 |

3.10 Workmanship. The finished laundry bag shall conform to the quality established by this specification. Each finished laundry bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter shall be completely removed. The grommets shall be securely clinched without distortion, cracking, splitting, or cutting of the basic material. The grommets shall not be misaligned or distorted nor contain any corrosion, cut, dent, nick, burr, crack or sharp edge. The occurrence of defects shall not exceed those cited under 4.5 in this document.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspections requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Conformance inspection (see 4.3)

4.2 First article inspection. A first article, submitted in accordance with 3.1, shall be inspected for compliance with design, construction, and dimensional requirements and tested in accordance with 4.4.1, 4.5 and 4.6.

4.2.1 First article sample. The sample unit shall be one laundry bag and the lot size shall be expressed in units of laundry bags.

4.3 Conformance inspection. Conformance inspection shall consist of all examinations and tests specified in Section 4.

4.3.1 Conformance sampling. Unless otherwise specified, sampling for inspection shall be performed in accordance with the provisions of ASQ-Z1.4. The sample unit shall be one laundry bag and the lot size shall be expressed in units of laundry bags.

4.3.1.1 In-process examination. Visual and dimensional examinations shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with requirements specified in Section 3. Materials and components, which can be classified as having a defect in accordance with Table III, shall be removed from production.

4.3.1.2 Inspection conditions. Unless otherwise specified in this specification, all inspections shall be performed in accordance with the test conditions specified in Section 4 of this document.

4.5.1 Component and material testing. The requirements for the laundry bag shall be tested in accordance with the test methods specified in Table III.

**THIS SPACE INTENTIONALLY LEFT BLANK.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE III. End item and component testing

| Characteristics | Requirement Paragraph | Requirement | Verification 1/ |
|---|---|---|---|
| Cloth, nylon | 3.4.1 | All | PIA-C-7219 |
| Drawstring | 3.4.2 | All | MIL-PRF-17343 |
| Grommets | 3.5.1 | All | NASM 16491 |
| Thread | 3.5.2 | All | A-A-59826 |
| Label | 3.5.3 | All | MIL-DTL-32075 |
| Bar code label/tag | 3.5.4 | All | MIL-DTL-32075 |

1/ All characteristics cited in end item document shall be tested.

4.5 Visual examination. Each laundry bag selected for visual examination shall be inspected for the defects cite under Table IV.

TABLE IV. End item visual defects

| Examination | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| Material | Color not as specified | 101 | |
| | Weakening defects; smash or float | 102 | |
| | Any hole, needle chew, cut, tear, mend, burn or drill hole | 103 | |
| Cleanness | Any spot or stain (outside) | | 201 |
| Components | Component parts or required operations omitted | 104 | |
| | Any component parts not cut in accordance with specification requirements | 105 | |
| | Color not as specified | 106 | |
| | Incorrect type, fiber | 107 | |
| Accuracy of Seams | Seams twisted, puckered or pleated | | 202 |
| | Part of bag caught in any unrelated operation or stitching | 108 | |
| | Ends of all seams or stitching's not caught in other seams or stitching back tacked not less than ½ inch | | 203 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects - Continued

| Examination | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| | Ends of a continuous line of stitching overlapped less than 1 /2 inch or more than 1 inch beyond defective stitching area | | 204 |
| | Thread ends not trimmed or loose thread not removed | | 205 |
| | Thread breaks, 2 or more skipped or run off stitches overstitched less than ½ inch | | 206 |
| Gauge of stitching, stitching margins | Irregular, unevenly gauged, not uniform beyond range specified | | 207 |
| Open seams or run offs: | Up to ¼ inch inclusive | | 208 |
| | More than ¼ inch | 109 | |
| Raw edges (securely caught in seam) | More than ¼ inch to and including 1 inch | | 209 |
| | More than 1 inch | 110 | |
| Seam and stitch types | Not as specified | 111 | |
| | Chain portion of 401 stitch on outside of bag | 112 | |
| Stitch tension | Loose tension resulting in loose seam | 113 | |
| | Tight tension (stitches break when normal strain is applied to the seam or stitching) | 114 | |
| Stitches per inch (score only when condition exists on major portion of the seam) | One stitch less than the minimum or any number in excess of the maximum specified | | 210 |
| | Two or more stitches less than the minimum specified | 115 | |
| Crossbox stitch | One or more missing, loose or misplaced | 116 | |
| | Not size specific | | 211 |
| Carry handles | Missing, misplaced, size not as specified | 117 | |
| | Free opening less than 5 ½ inches or more than 6 ½ inches | | 212 |
| Grommets | Color, size and finish not as specified | | 213 |
| | Washer is not on inside of bag | 118 | |
| | Omitted, malformed, damaged or misplaced | 119 | |
| | Clinched too tight cuts fabric or insecurely attached | | 214 |
| | Incorrect size, style or finish not as specified | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects - Continued

| Examination | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| Drawstring Rope | Omitted | 120 | |
| | Less than 8 feet | 121 | |
| | Any end not seared or knotted | | 215 |
| | Wrong color | | 216 |
| | Not as specified | | 217 |
| Marking, Label | Missing, incorrect or illegible | 122 | |
| | Misplaced | | 218 |
| Barcode label | Omitted or illegible to Human-Readable Interpretation (HRI) | 123 | |
| | Not readable by scanner | 124 | |
| | Not visible on folded, packaged item | 125 | |
| | Causes damage to the item | 126 | |
| Finished dimensions | Measurement of item not as specified | 127 | |

4.6 End item dimensional examination. The laundry bag selected for dimensional examination shall be examined for the finished dimensions specified in Table II. The bag shall be laid flat when measuring. Any dimension not within the specified tolerance shall be cause for rejection. classified as a defect.

A. Length of bag. The length shall be measured from the top edge of the bag to the bottom of the bag and shall include the bottom seam.

B. Width of bag. The width of the bag shall be measured from folded edge to folded edge at the top opening of the bag.

C. Body handle, top end. The top end of the body handle shall be measured from the top edge of the bag to the top end of the handle.

D. Body handle, bottom end. The bottom end of the body handle shall be measured from the top edge of the bag to the bottom edge of the handle.

E. Handle opening. The handle opening for both the body handle and the bottom bag handle shall be measured between each open end (one end of the open edge to the other side of the open edge).

F. Diameter of bag. The diameter of the bag shall be measured on the bottom of the bag from seam to seam across the middle exclusive of the bottom seam.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

G. Crossbox stich. The length and width of each crossbox stitch shall be measured.

H. Bottom handle placement. Measure the handle end directly from the body side seam (side wall). The measurement shall be taken from the body side seam to the handle to the edge of the body bag/bottom seam. This measurement shall not include the body bag/bottom seam.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products or by contacting the responsible packaging activity.

6. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The bags are intended for use by the Naval personnel serving aboard ship for storing bedding, linens and clothing to be laundered.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Quantity (see 1.2).
c. National Stock Number.
d. Applicable Government drawings, including revisions.
e. When first article is required (see 3.1).
f. Number of first article inspection samples (see 4.2.1).
g. Name and address of the first inspection facility; and the name and address of the Government activity responsible for conducting the first article inspection program.
h. Packaging required (see 5.1).
i. Specific issue of individual documents referenced (see 2.2).
j. Inspection conditions.
k. Conformance inspection and acceptable quality limits.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

6.3 Information requests. For access to information such as patterns, drawings, standard shade samples of cloth etc. go to Troop Support's website for their Specification/Pattern/Drawing Request form, https://www.dla.mil/troop-support/clothing-and-textiles/industry-support/spec-request/. Complete the request form and then submit. Requests to use equivalent materials and/or components or to make changes to the pattern should be sent to the contracting officer for approval by the military service.

6.4 Subject term (key word) listing.

Duffle bag

6.5 Supersession. This document supersedes MIL-B-21332E and A-A-55176 with NSN 8465-00-616-9576.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army-GL
Navy-NU
DLA-CT

Preparing activity:
DLA-CT
(Project number: 8465-2023-005)

Agent:
Navy-NU

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

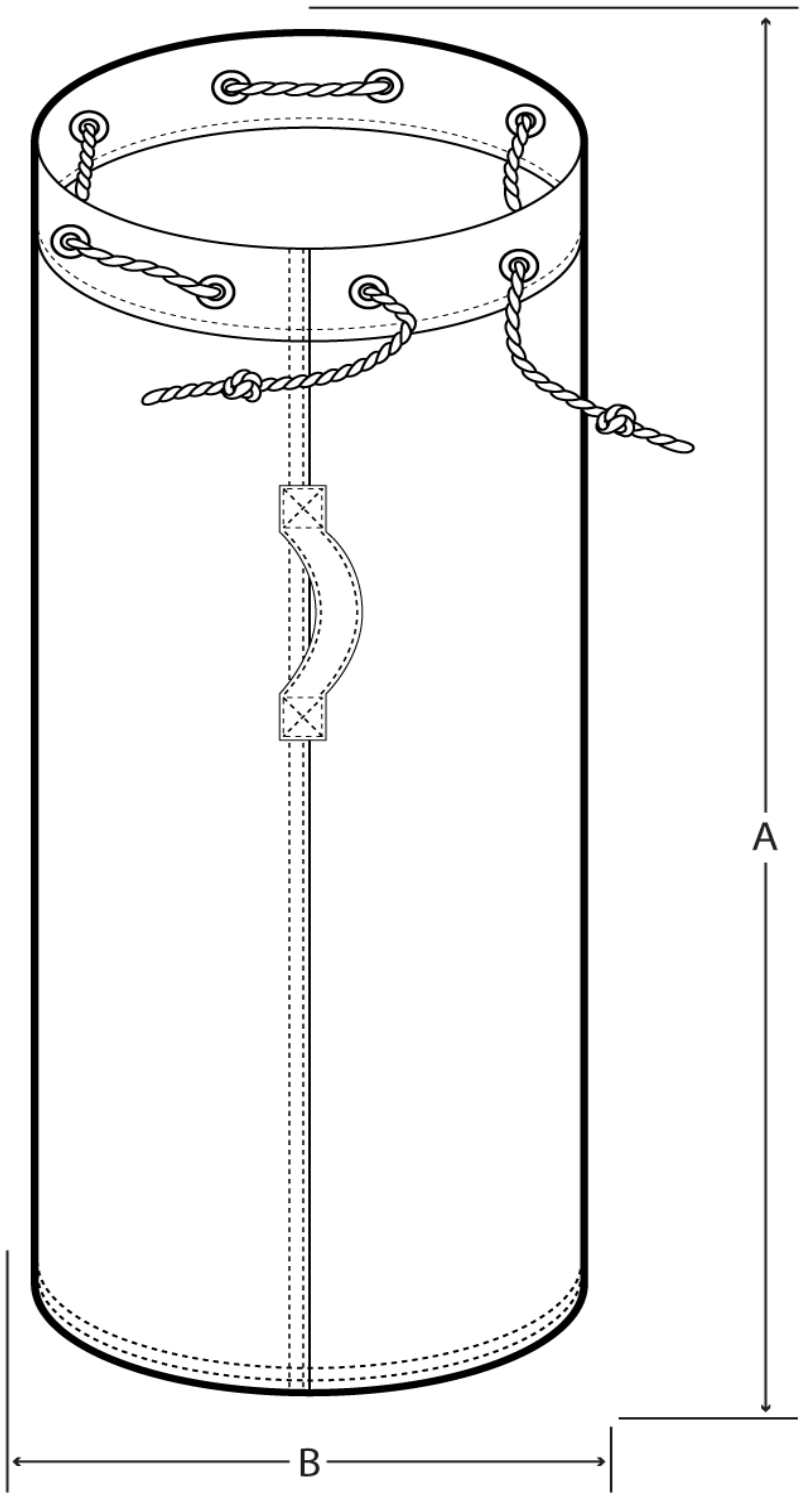



FIGURE 1. Laundry bag



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

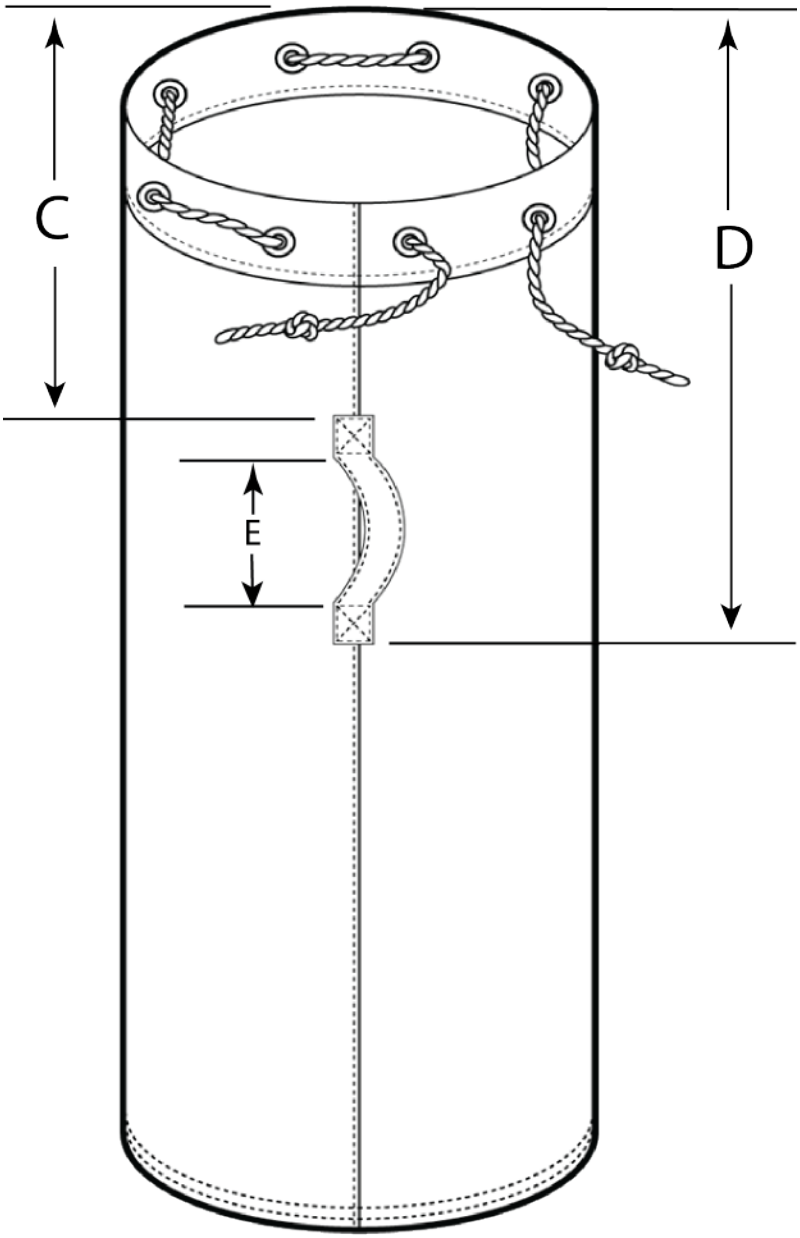



FIGURE 3. Laundry bag, with alternate stitching in the body



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

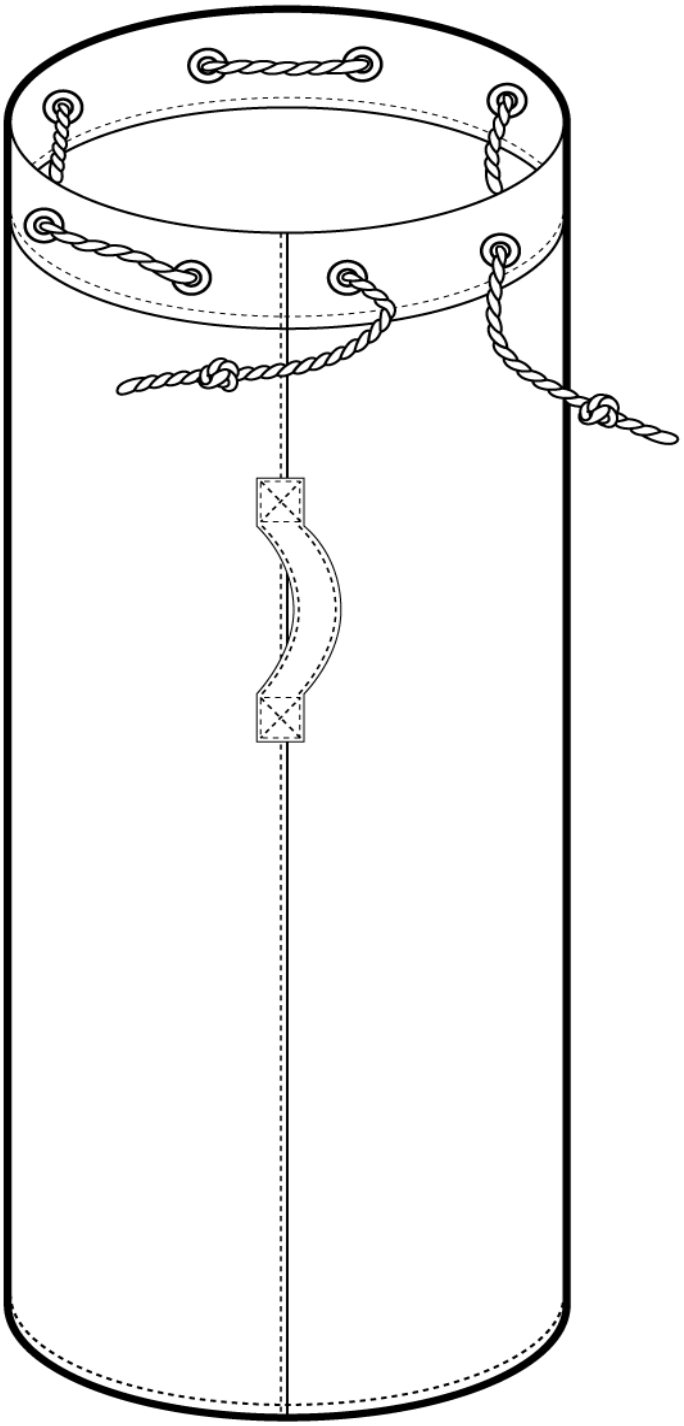


FIGURE 4. Laundry bag, alternate stitching in the body and bottom of the bag



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.

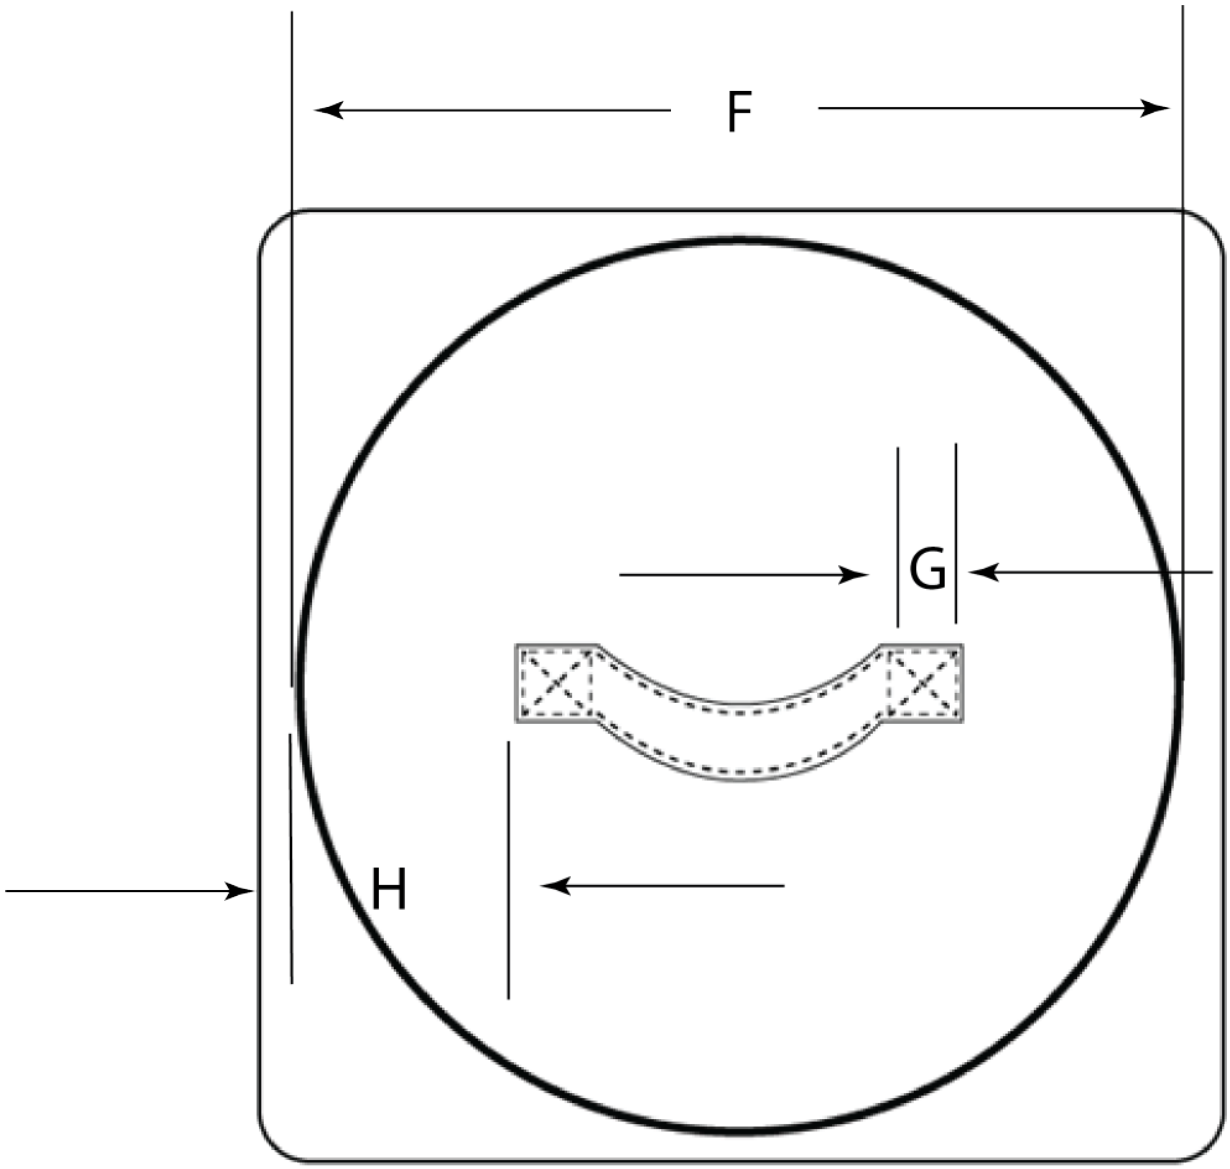



FIGURE 5. Handle placement, bottom of laundry bag



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:43Z
Check the source to verify that this is the current version before use.