INCH-POUND
MIL-PRF-32700/1
21 March 2022

PERFORMANCE SPECIFICATION SHEET

# CAPACITOR, FIXED, ELECTROLYTIC (CONDUCTIVE POLYMER TANTALUM), SURFACE MOUNT, NON-ESTABLISHED RELIABILITY AND ESTABLISHED RELIABILITY, MOLDED SINGLE ANODE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-32700.

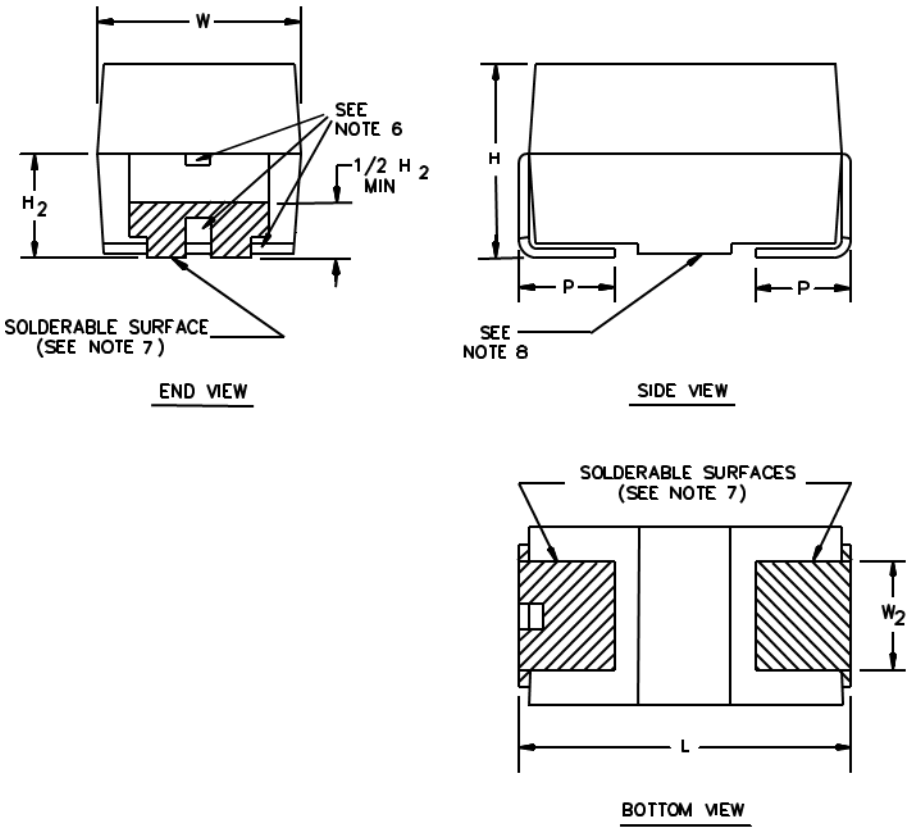



FIGURE 1. Molded single anode chip capacitors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:38Z
Check the source to verify that this is the current version before use.

| Case size | Length (L) | Width (W) | Height (H) | Term. Length (P) | Term. width ($W_2$) | $H_2$ min |
|---|---|---|---|---|---|---|
| B | .138 ± .008 (3.50 ± 0.20) | .110 ± .012 (2.80 ± 0.30) | .075 ± .012 (1.90 ± 0.30) | .031 ± . 012 (0.80 ± 0.3) | .087 ± .008 (2.20 ± 0.20) | .028 (0.71) |
| C | .236 ± .016 (6.00 ± 0.40) | .126 ± .012 (3.20 ± 0.30) | .098 ± .012 (2.50 ± 0.30) | .051 ± .0120.30 (1.30 ± 0.30) | .087 ± .008 (2.20 ± 0.20) | .039 (0.99) |
| D | .287 ± .012 (7.30 ± 0.30) | .169 ± .012) (4.30 ± 0.30) | .110 ± .012 (2.80 ± 0.30) | .051 ± .012 (1.30 ± 0.30) | .094 ± .008 (2.40 ± 0.20) | .039 (0.99) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Metric equivalents are in parentheses.
4. These capacitors are designed for mounting by dip soldering, thermo-compression bonding, reflow soldering, or other conventional means.
5. The anode (+) terminal shall be identified by a marking on the case.
6. Shown with optional termination cut-outs.
7. Solderable surfaces are only those surfaces designated as such. Termination edges are not considered solderable.
8. Shown with optional glue pad. At the option of the manufacturer, a glue pad between the solderable surfaces may be included.

FIGURE 1. Molded single anode chip capacitors – Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: K = ±10 percent, or M = ±20 percent.

Rated voltage: See table I. Above +85°C, voltage derating is required (see MIL-PRF-32700).

Operating temperature range: -55°C to +125°C.

Termination finish: G or H as specified in MIL-PRF-32700.

Product level: A, X, Y, or Z as specified in MIL-PRF-32700.

DC leakage (DCL): See table I.

Dissipation factor (DF): See table I.

Equivalent series resistance (ESR) at 100 kHz: See table I.

Biased humidity:

Test duration: 500 hours, minimum.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:38Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

| Part or identifying number (PIN) M3270001 1/ | DC rated voltage (+85°C) | Cap. (nom) | DC Leakage (max.) | | | Dissipation factor (max.) | | | | Max ESR 100 kHz | Allowable ripple current (max.) 2/ | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | -55°C | +25°C | +45°C | +85°C | +125°C |
| | Volts | µF | µA | µA | µA | % | % | % | % | mΩ | mA | mA | mA |
| D337 - A - - - | 2.5 | 330 | 83 | 830 | 996 | 10 | 12 | 15 | 10 | 50 | 2258 | 1581 | 565 |
| B107 - B - - - | 3 | 100 | 30 | 300 | 360 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| B157 - B - - - | 3 | 150 | 45 | 450 | 540 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| D337 - B - - - | 3 | 330 | 99 | 990 | 1188 | 10 | 12 | 15 | 10 | 50 | 2258 | 1581 | 565 |
| B686 - C - - - | 4 | 68 | 28 | 280 | 336 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| B107 - C - - - | 4 | 100 | 40 | 400 | 480 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| D227 - C - - - | 4 | 220 | 88 | 880 | 1056 | 10 | 12 | 15 | 10 | 45 | 2380 | 1666 | 595 |
| D337 - C - - - | 4 | 330 | 132 | 1320 | 1584 | 10 | 12 | 15 | 10 | 60 | 2062 | 1443 | 515 |
| D477 - C - - - | 4 | 470 | 188 | 1880 | 2256 | 10 | 12 | 15 | 10 | 60 | 2062 | 1443 | 515 |
| B336 - D - - - | 6.3 | 33 | 21 | 210 | 252 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| B476 - D - - - | 6.3 | 47 | 30 | 300 | 360 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| B686 - D - - - | 6.3 | 68 | 43 | 430 | 516 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| D157 - D - - - | 6.3 | 150 | 95 | 950 | 1140 | 10 | 12 | 15 | 10 | 45 | 2380 | 1666 | 595 |
| D227 - D - - - | 6.3 | 220 | 139 | 1390 | 1668 | 10 | 12 | 15 | 10 | 60 | 2062 | 1443 | 515 |
| D337 - D - - - | 6.3 | 330 | 208 | 2080 | 2496 | 10 | 12 | 15 | 10 | 50 | 2258 | 1581 | 565 |
| B226 - F - - - | 10 | 22 | 22 | 220 | 264 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| B336 - F - - - | 10 | 33 | 33 | 330 | 396 | 8 | 9.6 | 12 | 8 | 100 | 1127 | 789 | 282 |
| D107 - F - - - | 10 | 100 | 100 | 1000 | 1200 | 10 | 12 | 15 | 10 | 45 | 2380 | 1666 | 595 |
| D157 - F - - - | 10 | 150 | 150 | 1500 | 1800 | 10 | 12 | 15 | 10 | 75 | 1844 | 1291 | 461 |
| D476 - H - - - | 16 | 47 | 76 | 760 | 912 | 10 | 12 | 15 | 10 | 55 | 2153 | 1507 | 538 |
| D686 - H - - - | 16 | 68 | 109 | 1090 | 1308 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D107 - H - - - | 16 | 100 | 160 | 1600 | 1920 | 10 | 12 | 15 | 10 | 70 | 1909 | 1336 | 477 |
| D226 - J - - - | 20 | 22 | 44 | 440 | 528 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D336 - J - - - | 20 | 33 | 66 | 660 | 792 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D476 - J - - - | 20 | 47 | 94 | 940 | 1128 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| C685 - K - - - | 25 | 6.8 | 17 | 170 | 204 | 10 | 12 | 15 | 10 | 170 | 985 | 690 | 246 |
| C106 - K - - - | 25 | 10 | 25 | 250 | 300 | 10 | 12 | 15 | 10 | 170 | 985 | 690 | 246 |
| D156 - K - - - | 25 | 15 | 38 | 380 | 456 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D226 - K - - - | 25 | 22 | 55 | 550 | 660 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D336 - K - - - | 25 | 33 | 83 | 830 | 996 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D226 - L - - - | 30 | 22 | 66 | 660 | 792 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D336 - L - - - | 30 | 33 | 99 | 990 | 1188 | 10 | 12 | 15 | 10 | 120 | 1458 | 1020 | 364 |
| D106 - M - - - | 35 | 10 | 53 | 530 | 636 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D156 - M - - - | 35 | 15 | 53 | 530 | 636 | 10 | 12 | 15 | 10 | 95 | 1638 | 1147 | 410 |
| D106 - N - - - | 50 | 10 | 50 | 500 | 600 | 10 | 12 | 15 | 10 | 120 | 1458 | 1020 | 364 |
| D475 - P - - - | 63 | 4.7 | 30 | 300 | 360 | 10 | 12 | 15 | 10 | 120 | 1458 | 1020 | 364 |

1/ Complete PIN shall begin with M3270001 and shall include additional symbols to indicate capacitance tolerance, termination finish, product level, and surge current option.

2/ Ripple current limits are given for general information only. Contact the manufacturer for more information.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:38Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2020-034)

Review activities:
Army - AR, MI
Navy - AS, MC, OS, SH
Air Force - 19
Other – MDA, NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:38Z
Check the source to verify that this is the current version before use.