FED. SUP CLASS
3455

Review activity:
DSA-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

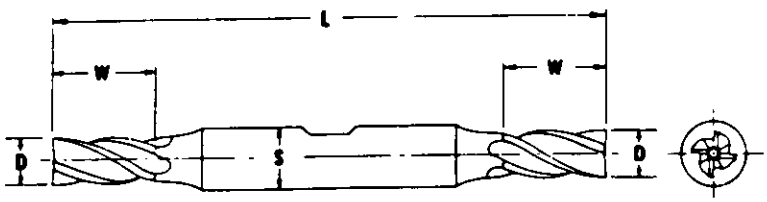

R.H. CUTTERS WITH R.H. HELIXES ARE STANDARD. STARRED SIZES ALSO STANDARD WITH L.H. CUT, L.H. HELIX. HELIX ANGLE GREATER THAN 19° BUT NOT MORE THAN 39°.

DASH NO.	Diameter of Cutter (D) Nominal	Diameter of Shank (S) Nominal	Length of Cut (W) Nominal	Overall Length (L) Nominal
-1	1/8	3/8	3/8	3-1/16
-3	3/16	3/8	1/2	3-1/4
-5	1/4	3/8	5/8	3-3/8
-6	9/32	3/8	11/16	3-1/2
-9	3/8	3/8	3/4	3-1/2
-10	13/32	1/2	1	4-1/8
-15	5/8	5/8	1-3/8	5
-17	3/4	3/4	1-5/8	5-5/8

NOTES:
1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. The part number consists of the MS number, plus the dash number.
Example: MS15715-3.

© **CANCELED** after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

APPROVED 20 Sep 54 REVISED (A) 9 Apr 57 (B) 1 AUG 78 (C) 31 Mar 81

P.A. AL Other Cust 99	TITLE CUTTERS, MILLING, END, DOUBLE-END MULTIPLE-FLUTE, FLATTED STRAIGHT-SHANK	MILITARY STANDARD MS15715
Procurement Specification	SUPERSEDES:	SHEET 1 OF 1

Project No. 3455-0084

DD FORM 1 SEP 65 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2055

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.