FED. SUP CLASS
5935

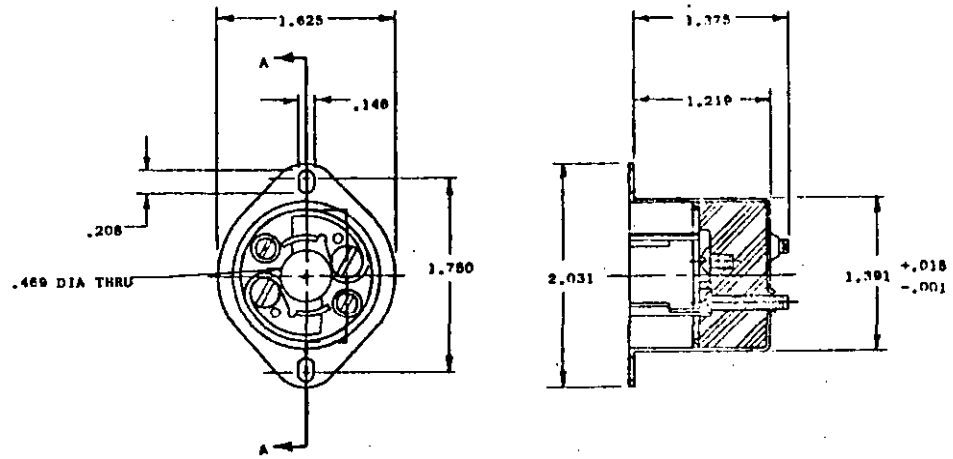

DASH NO.
-1

NOTES:

1. MATERIAL
   a. BASE-INSULATING MATERIAL, MOLDED COMPOSITION.
   b. CASING-CORROSION RESISTANT OR SUITABLY PLATED TO RESIST CORROSION.
   c. CONTACT BLADES-BRASS, .060, 2 REQ'D.
   d. TERMINAL SCREWS-BRASS, 2 REQ'D.
   e. ADDITIONAL SCREWS TO BE CORROSION RESISTANT OR SUITABLY PLATED TO RESIST CORROSION.

2. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .031. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.

(A) CANCELED AFTER 6 April 1983 NO SUPERSEDING STANDARD.

APPROVED 1 MAY 1963 REVISED (A) 6 April 1983

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. NAVY - AS Other Cust	TITLE RECEPTACLE, ELECTRICAL, TWIST LOCK, MALE, 2 POLE, 2 WIRE, 20 AMPERES, 250 VOLTS	MILITARY STANDARD MS18052(AS)
PROCUREMENT SPECIFICATION W-C-596	SUPERSEDES: OSTD 600 PART NO. 82-Z-7113-11	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Naval Air Systems Command, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.