FED SUP CLASS
1650

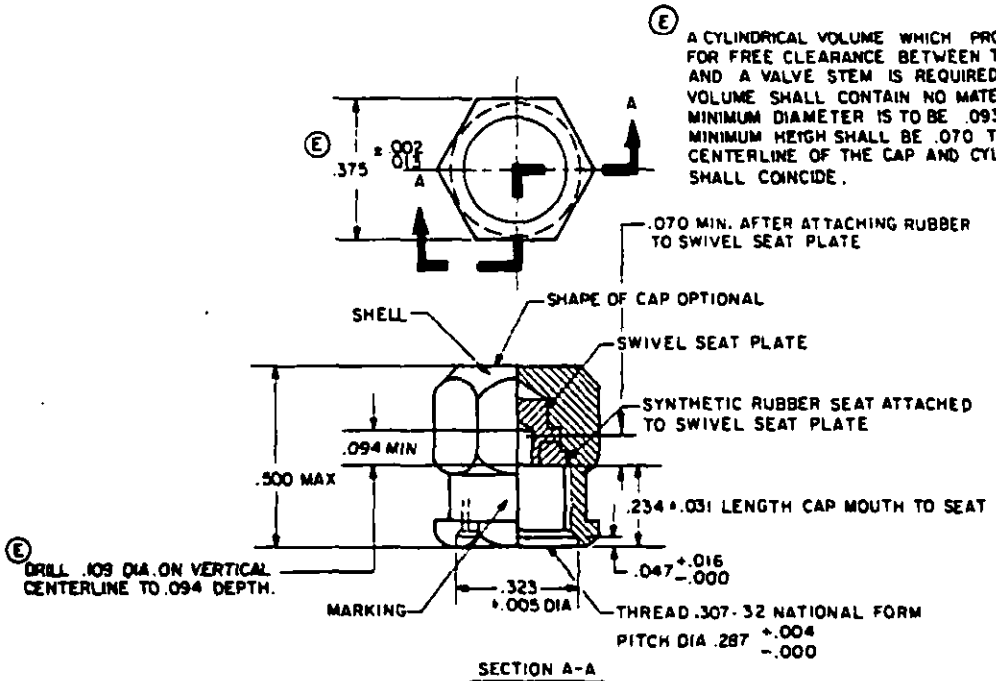

Ⓔ A CYLINDRICAL VOLUME WHICH PROVIDES FOR FREE CLEARANCE BETWEEN THIS CAP AND A VALVE STEM IS REQUIRED THIS VOLUME SHALL CONTAIN NO MATERIAL. MINIMUM DIAMETER IS TO BE .093 AND MINIMUM HEIGH SHALL BE .070 THE VERTICAL CENTERLINE OF THE CAP AND CYLINDER SHALL COINCIDE.

SECTION A-A

DASH NO.	FIIN
-1	

MATERIAL: SHELL AND SWIVEL SEAT PLATE: BRASS, SPECIFICATION QQ-B-626, COMPOSITION 360.
FINISH: PERMANENT NONFLAKING YELLOW LACQUER EXTERNAL SURFACE OF CAP
REMOVE ALL BURRS AND SHARP EDGES
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016
PART NUMBER MS20813-1 REPLACES AND IS INTERCHANGEABLE WITH AN813-1B
FOR ACCEPTABLE PRODUCTS, SEE QPL-5500.

REFERENCE TO INTERNATIONAL STANDARDIZATION AGREEMENT DELETED.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 APR 57 REVISED Ⓐ 30 AUG 63 Ⓑ 23 APR 75 Ⓒ 29 JULY 77 Ⓓ 6 JUNE 86 Ⓔ 26 AUG 87

P. A. AF-99 Other Cust NAVY-AS AF-99 ARMY-AV	INTERNATIONAL INTEREST	TITLE CAP, PNEUMATIC VALVE, HIGH PRESSURE	MILITARY STANDARD MS20813
PROCUREMENT SPECIFICATION MIL-C-5500	SUPERSEDES AN813		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

1650-0409

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

USER ACTIVITIES: ARMY AT

REVIEWER ACTIVITIES

AMSC N/A

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Inheritance for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.