FED. SUP CLASS
1630

User:
Navy - MC

Reviewer:
Army - AV
Navy - AS

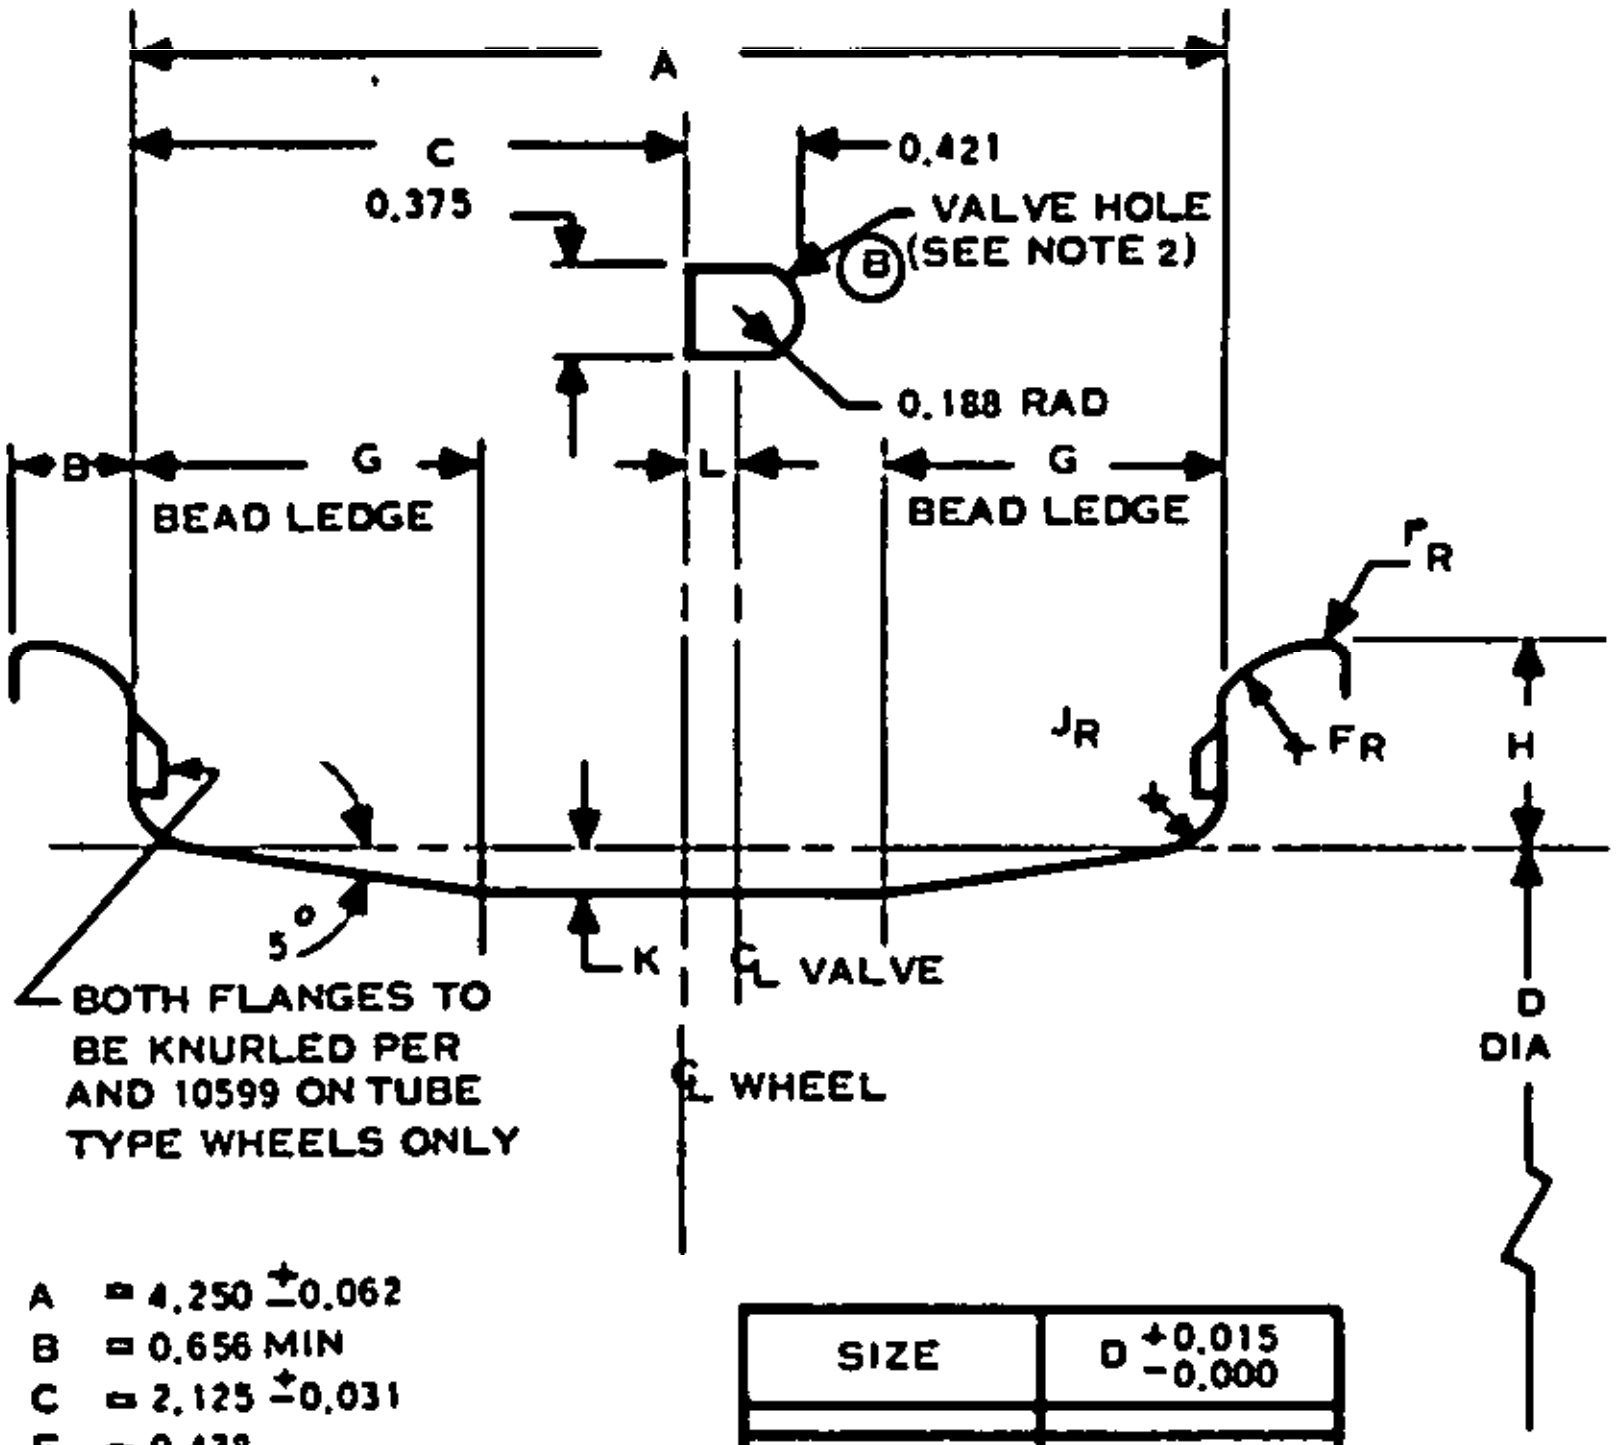
A
C
0.375
0.421
VALVE HOLE
Ⓑ (SEE NOTE 2)
0.188 RAD
B
G
BEAD LEDGE
L
G
BEAD LEDGE
r_R
J_R
F_R
H
5°
K
℄ VALVE
℄ WHEEL
D
DIA
BOTH FLANGES TO BE KNURLED PER AND 10599 ON TUBE TYPE WHEELS ONLY

A = 4.250 ±0.062
B = 0.656 MIN
C = 2.125 ±0.031
F_R = 0.438
G = 1.375 MIN.
H = 0.875 ±0.010
K = 0.161 MIN.
= 0.375 MAX.
J_R = 0.219
L = 0.250
r_R = 0.062 MIN.

SIZE	D $^{+0.015}_{-0.000}$
24 X 5.5	14.000
22 X 5.5	12.000
20 X 5.5	10.000
18 X 5.5	8.000

NOTES

Ⓑ 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓑ 2. VALVE HOLE AND "L" DIMENSION REQUIRED ON TUBE TYPE AND CONVERTIBLE WHEELS ONLY, AND SHALL BE CHAMFERRED PER AND 10598. TUBELESS WHEELS REQUIRE A MACHINED BOSS PER MS33649.

Ⓑ 3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; FRACTIONS ±1/64, DECIMALS ±0.005, ANGLES ±0°30'

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 25 APR 56 REVISED Ⓐ 19 MARCH 64 Ⓑ 20 MAR 1969

This edition standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-70 Other Cust ARMY-AV NAVY-AS	TITLE RIM CONTOURS — 24 X 5.5, 22 X 5.5, 20 X 5.5 AND 18 X 5.5, TYPE VII, EXTRA HIGH PRESSURE, LANDING GEAR WHEEL	MILITARY STANDARD MS 24370
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE: [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.