FED. SUP CLASS
5930

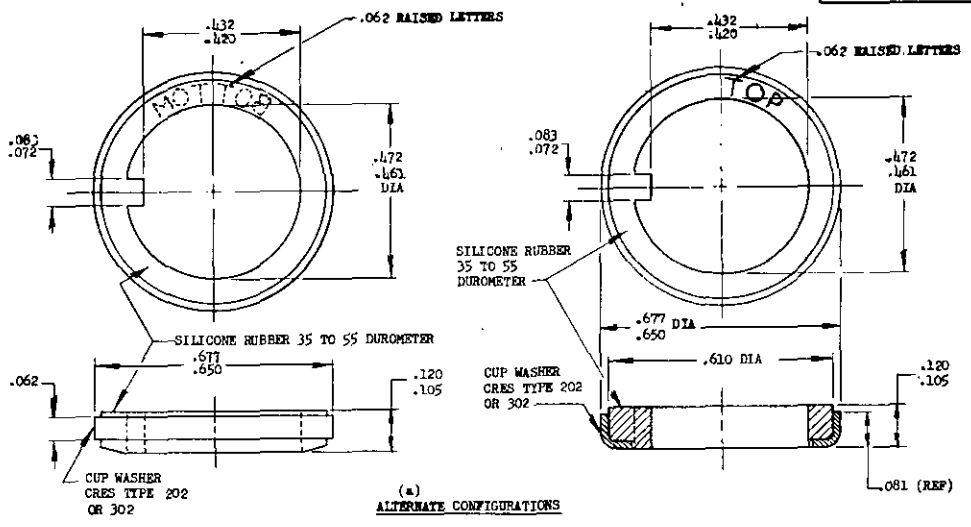

(a)
ALTERNATE CONFIGURATIONS

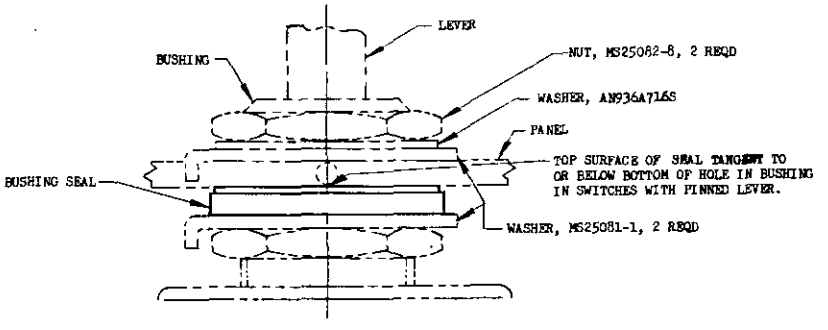

DETAIL OF BUSHING SEAL ASSEMBLY

DASH NO.
-1

(a) BOTH VERSIONS ARE ACCEPTABLE AND ARE MUTUALLY INTERCHANGEABLE PROVIDED THEY MEET THE SPECIFIED REQUIREMENTS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

BUSHING SEAL TO BE SO ASSEMBLED THAT SURFACE MARKED "TOP" IS UP, OR "BOTTOM" IS DOWN.

SWITCH ASSEMBLIES WITH REMOVABLE PANEL SEAL SHALL BE MOUNTED IN A SUBMERSIBLE ENCLOSURE AND SUBJECTED TO THE SUBMERSIBLE (15 FOOT, TEST SPECIFIED IN MIL-STD-108. THERE SHALL BE NO LEAKAGE INTO THE SWITCH DUE TO ENTRY OF WATER THROUGH THE BUSHING SEAL.

(E) ~~CANCELED AFTER 25 NOVEMBER 1969~~

(E) REACTIVATED

(F) CANCELED AFTER 23 MAR 1979 USE MS5423/16.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - MC Other Cust USAF - 11	TITLE SEAL, BUSHING, EXTERNAL	MILITARY STANDARD MS25196(ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: 56A3A329	SHEET 1 OF 1

APPROVED 1 Sep 56 — REVISED (A) 24 Apr 57 (B) 28 Oct 62 (C) 3 Jan 63 (D) 15 Nov 65 (E) 24 Feb 66 (F) 23 MAR 1979

Review activities: Navy - MC
USAF - 11

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

DD FORM SEP 67 672-1 (Limited coordination)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1979—603-022/2200

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:05Z
Check the source to verify that this is the current version before use.