FED. SUP CLASS
2995

MS9971

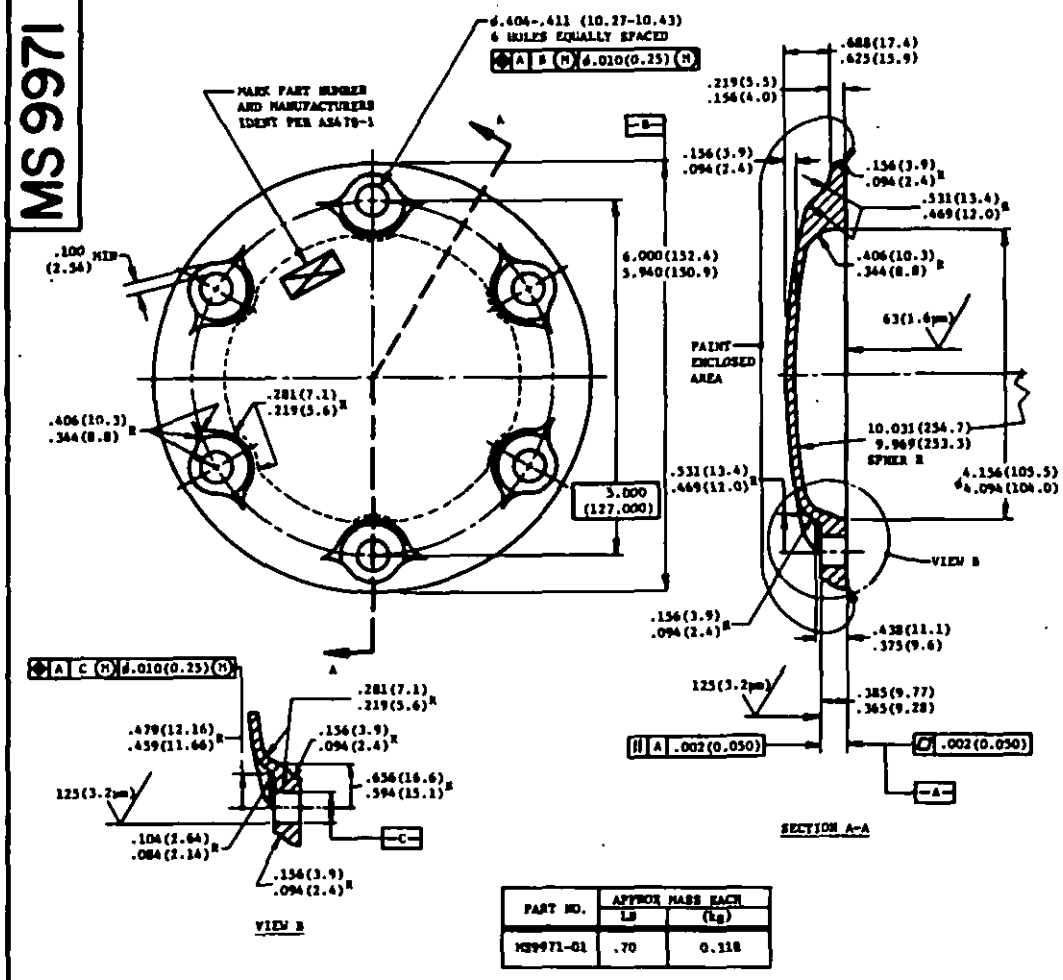

PART NO.	APPROX MASS EACH	
	LB	(kg)
MS9971-01	.70	0.318

1. MATERIAL: ALUMINUM AMS 4212 OR AMS 4281.
2. PARTING LINES OF CASTINGS ARE TO BE COMMERCIALLY CLEAN.
3. SURFACE TEXTURE: ANSI B46.1, UNSPECIFIED SURFACES AS CAST
4. FLUORESCENT PENETRANT INSPECTION PER AMS 2643.
5. FINISH: ANODIC TREAT ALL OVER PER AMS 2470 OR AMS 2471. PAINT PER AMS 2510 WHERE SHOWN. DIMENSIONS APPLY BEFORE PAINTING.
6. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. METRIC CONVERSIONS IN PARENTHESES ARE INTERNATIONAL SYSTEM UNITS (SI).
8. DIMENSIONING AND TOLERANCING: ANSI Y14.5, ϕ = DIAMETER.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

THIRD ANGLE PROJECTION

APPROVED 1 Oct 73 . REVISED

P.A. Air Force - 11 Other Cust Navy - AS	TITLE COVER, ACCESSORY DRIVE, 5 INCHES (127 mm) BC ROUND, ALUMINUM	MILITARY STANDARD MS 9971
PROCUREMENT SPECIFICATION SEE NOTES	SUPERSEDES:	SHEET 1 OF 1

User activities: Navy - MC, CG

Review activities: Air Force - 71

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for reprocuring use shall be made from this document.

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

* U. S. GOVERNMENT PRINTING OFFICE: 1972—713-148/1884

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.