THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

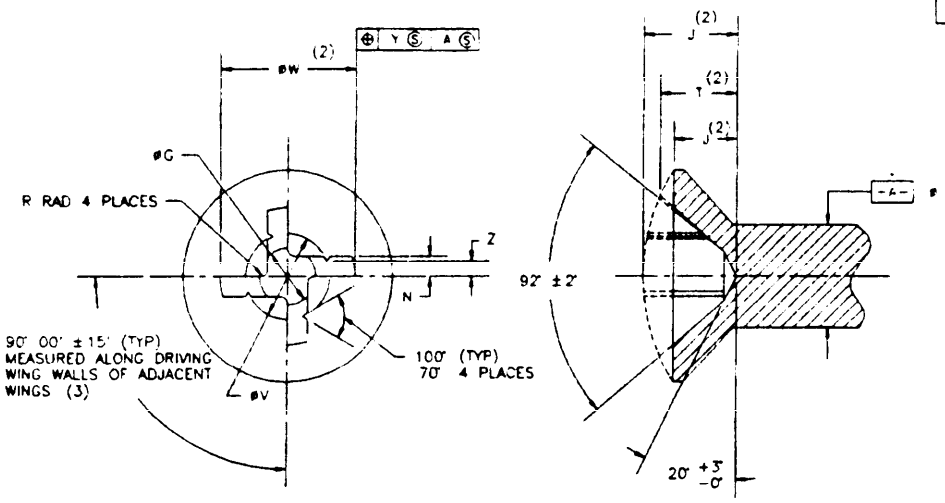


FIGURE 1. RIBBED OFFSET CRUCIFORM RECESS

TABLE I. RIBBED OFFSET CRUCIFORM RECESS DIMENSIONS

RECESS SIZE	N		ØG		R		ØV		Y	Z	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	TOL	MAX	MIN
6	.029	.026	.082	.078	.030	.016	.106	.094	.012	.0255	.0245
8	.034	.031	.096	.092			.125	.113		.0305	.0295
10	.039	.036	.111	.107	.040	.023	.144	.132		.0355	.0345
1/4	.051	.048	.147	.143			.188	.176	.016	.0475	.0465
5/16	.064	.061	.184	.180	.052	.031	.244	.232		.0605	.0595

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. THE SPECIFIC PART STANDARD OR DRAWING WHICH SPECIFIES THIS RECESS DRIVE BY REFERENCING THIS DOCUMENT SHALL SPECIFY VALUES FOR DIMENSIONS J, W, T, AND DEPTH OF GAGE PENETRATION, IF THE VALUES SPECIFIED HEREIN ARE NOT COMPATIBLE WITH THE PART CONFIGURATION OR PERFORMANCE REQUIREMENTS.
3. RECESSES SHALL HAVE RIBS ON AT LEAST THE LOWER 75 PERCENT OF THE REMOVAL WALL OF EACH OF THE FOUR WINGS.
4. THE RIBBED RECESSES IN THIS DOCUMENT ARE COVERED UNDER UNITED STATES PATENT 4,084,478, WHICH EXPIRES 18 APRIL 1995. THE GOVERNMENT DOES NOT HAVE A ROYALTY FREE LICENSE. THESE RECESSES ARE ALSO PRODUCED AND MARKETED BY THE LICENSEES OF PHILLIPS SCREW COMPANY UNDER THE DESIGNATION OF ACR® TORQ-SET®.
5. FOR DIMENSIONS OF NON-RIBBED RECESSES, SIZES 0 THROUGH 5/8 INCH, SEE MS33781.
6. CERTAIN PROVISIONS OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS NATO STANAG 3802. WHEN CHANGE NOTICE, REVISION OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
7. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER.
8. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
9. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

(E) ENTIRE SPECIFICATION REVISED

INCH-POUND

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY- AV NAVY-
AIR FORCE- 99 DLA-
REVIEW: IS, 82
USER:
PROJECT NUMBER: 53GP-0270

MILITARY SPECIFICATION SHEET

TITLE
RECESS, OFFSET CRUCIFORM, RIBBED
DIMENSIONS OF
RECESS, GAGE AND DRIVER FOR

SPECIFICATION SHEET NUMBER
MS14191 20 SEPT 1994 REV E

SUPERSEDING
MS14191D 31 JULY 1987

AMSC- N/A FSC 53GP

DISTRIBUTION STATEMENT
A Approved for public release; distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:37Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

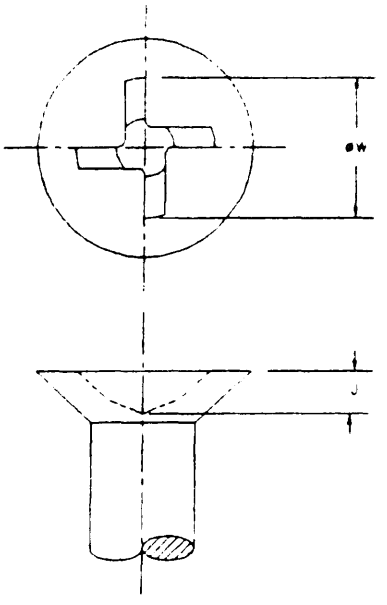


FIGURE 2

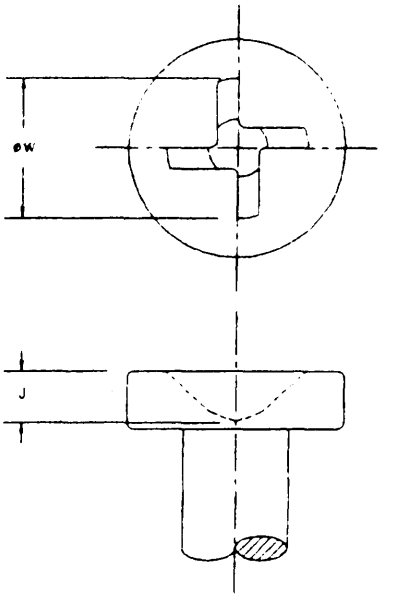


FIGURE 3

TABLE II

100° FLUSH HEAD

SCREW SIZE	RECESS AND DRIVER SIZE	øW WING	J RECESS DEPTH	GAGE PENET
6	6	.182 .172	.066 .056	.0500 .0395
8	8	.215 .205	.078 .068	.0595 .0480
10	10	.248 .238	.090 .080	.0685 .0560
1/4	1/4	.325 .315	.118 .108	.0890 .0750
5/16	5/16	.357 .347	.122 .112	.0860 .0700

TABLE III

RECESSED HEXAGON HEAD
FLAT PAN HEAD
FLAT FILLISTER HEAD

SCREW SIZE	RECESS AND DRIVER SIZE	øW WING	J RECESS DEPTH	GAGE PENET
6	6	.193 .183	.072 .062	.0555 .0450
8	8	.228 .218	.085 .075	.0660 .0545
10	10	.263 .253	.098 .088	.0760 .0635
1/4	1/4	.345 .335	.128 .118	.0990 .0850
5/16	5/16	.382 .372	.134 .124	.0985 .0825

NOTES:

1. DIMENSIONS ARE IN INCHES
2. GAGE PENETRATION IS DEFINED AS THE DISTANCE TO WHICH THE GAGE, SHOWN ON SHEET 5, WILL ENTER THE RECESS
3. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE
5. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY- AV NAVY-
AIR FORCE- 99 DLA-
REVIEW IS, 82
USER:
PROJECT NUMBER 53GP-0270

MILITARY SPECIFICATION SHEET

TITLE
RECESS, OFFSET CRUCIFORM, RIBBED
DIMENSIONS OF
RECESS, GAGE AND DRIVER FOR

SPECIFICATION SHEET NUMBER
MS14191 20 SEPT 1994
REV E

SUPERSEDING
MS14191D 31 JULY 1987

AMSC- N/A FSC 53GP

DISTRIBUTION STATEMENT
A Approved for public release; distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

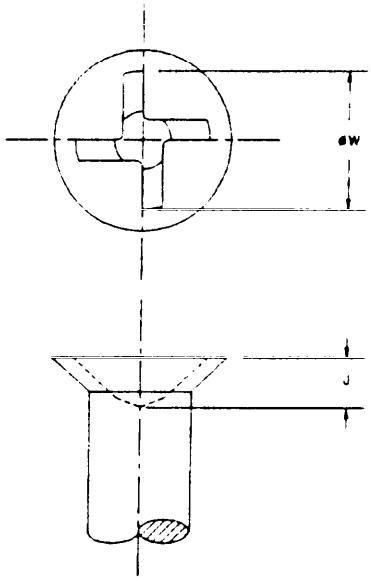


FIGURE 4

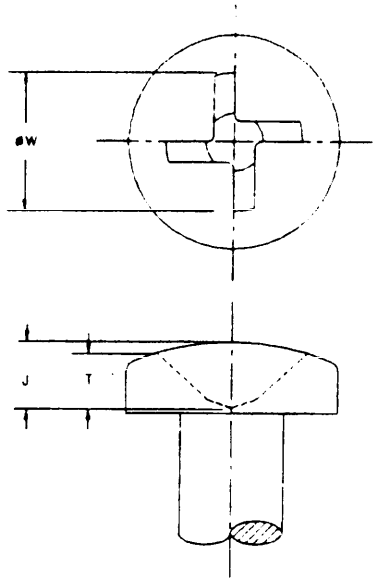


FIGURE 5

TABLE IV (3)
100° REDUCED FLUSH HEAD

SCREW SIZE	RECESS AND DRIVER SIZE	øW WING	J RECESS DEPTH	GAGE PENET
8	6	.182 .172	.066 .056	.0500 .0395
10	8	.215 .205	.078 .068	.0595 .0480
1/4	10	.248 .238	.090 .080	.0685 .0560
5/16	1/4	.325 .315	118 108	0890 0750
3/8	5/16	.357 .347	.122 .112	.0860 .0700

TABLE V (3)

SCREW SIZE	RECESS AND DRIVER SIZE	HEAD				
		PAN AND BRAZIER			PAN	BRAZIER
		øW WING	T RECESS DEPTH	GAGE PENET	J RECESS DEPTH	J RECESS DEPTH
6	6	.160 .150	.055 .045	.0390 .0285	.070 .060	.072 .062
8	8	.190 .180	.065 .055	.0470 .0355	.083 .073	.085 .075
10	10	.219 .209	.075 .065	.0540 .0415	.096 .086	.098 .088
1/4	1/4	.286 .276	.098 .088	.0695 .0555	.126 .116	.130 .120
5/16	5/16	.357 .347	.122 .112	.0860 .0700	.153 .143	.164 .154

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. GAGE PENETRATION IS DEFINED AS THE DISTANCE TO WHICH THE GAGE, SHOWN ON SHEET 5, WILL ENTER THE RECESS.
3. SEE MIL-STD-1515 FOR AIRCRAFT USAGE LIMITATIONS.
4. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
6. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY- AV NAVY-
AIR FORCE- 99 DLA-
REVIEW: IS, 82
USER:
PROJECT NUMBER: 53GP-0270

MILITARY SPECIFICATION SHEET

TITLE
RECESS, OFFSET CRUCIFORM, RIBBED
DIMENSIONS OF
RECESS, GAGE AND DRIVER FOR

SPECIFICATION SHEET NUMBER
MS14191 20 SEPT 1994
REV E

SUPERSEDING
MS14191D 31 JULY 1987

AMSC- N/A FSC 53GP

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

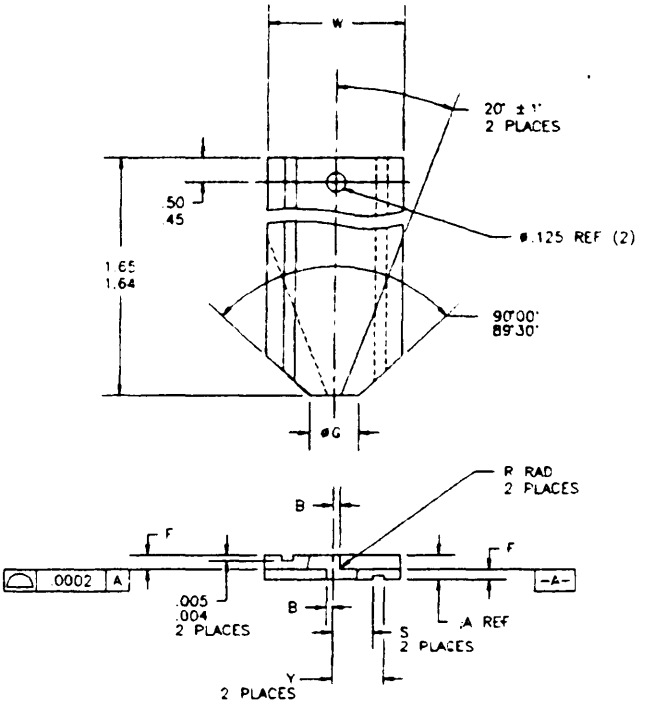


FIGURE 6. GAGE POINT

TABLE VI. GAGE POINT DIMENSIONS

RECESS SIZE	A REF		F +.0001		B MAX	øG ±.001		R MAX.	S -.002	W ±.010		Y +.002
	GO	NOT GO	GO	NOT GO		GO	NOT GO			GO	NOT GO	
6	.0519	.0581	.0259	.0290	.006	.083	.134	.015	.034	.250	.438	.054
8	.0619	.0681	.0309	.0340	.009	097	.159		042			.062
10	.0719	.0781	0359	.0390		112	.171	.022	050			070
1/4	.0959	.1021	.0479	0510	.014	.148	.225		069	.438	.625	.089
5/16	.1219	.1281	.0609	0640		186	282	030	091			.116

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. A HOLE OF SUITABLE SIZE TO BE DRILLED THROUGH GAGE FOR RING.
3. PERMANENTLY MARK MANUFACTURER'S PART NUMBER AND SERIAL NUMBER.
4. THE REMOVAL WALL OF BOTH WINGS ON GAGE POINTS TO HAVE RIB CLEARANCE RELIEF AS SHOWN.
5. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER.
6. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
7. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY- AV NAVY-
AIR FORCE- 99 DLA-
REVIEW: IS, 82
USER
PROJECT NUMBER: 53GP-0270

MILITARY SPECIFICATION SHEET

TITLE: RECESS, OFFSET CRUCIFORM, RIBBED DIMENSIONS OF RECESS, GAGE AND DRIVER FOR

SPECIFICATION SHEET NUMBER: MS14191 — 20 SEPT 1994 REV E

SUPERSEDING: MS14191D 31 JULY 1987

AMSC- N/A FSC 53GP

DISTRIBUTION STATEMENT: A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

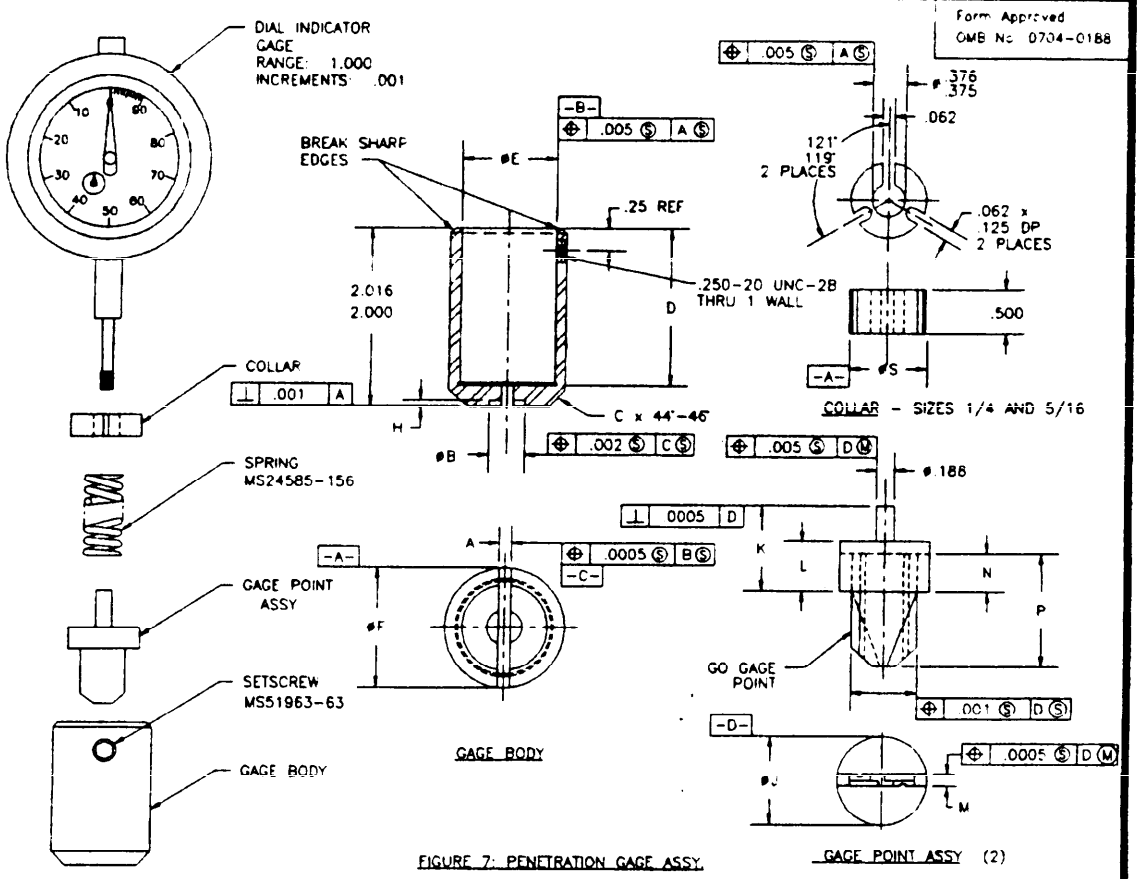


FIGURE 7. PENETRATION GAGE ASSY.

TABLE VII. PENETRATION GAGE DIMENSIONS

RECESS SIZE	A +.002	ØB +.002	C	ØD MAX	ØD MIN	ØE MAX	ØE MIN	ØF	H +.016	ØJ MAX	ØJ MIN	K	L	M ±.001	N	P ±.005	ØS -.0005
6	.053	.160	.125	1.880	1.875	.376	.375	.875	.031	.3745	.3740	.844	.500	.054	.188	.510	N/A
8	.063	.190												.064			
10	.073	.219												.074			
1/4	.097	.286	.250	1.755	1.750	.751	.750	1.250	.062	.7495	.7490	.719	.375	.098	.312	.800	.7495
5/16	.123	.357												.124			

NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ± .016.
2. COMPONENT BONDING AT MANUFACTURER'S OPTION.
3. MARKING SHALL INCLUDE MANUFACTURER'S NAME, PART NUMBER, AND RECESS SIZE.
4. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
6. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY - AV NAVY -
AIR FORCE - 99 DLA -
REVIEW: IS. 82
USER:
PROJECT NUMBER: 53GP-0270

MILITARY SPECIFICATION SHEET

TITLE: RECESS, OFFSET CRUCIFORM, RIBBED DIMENSIONS OF RECESS, GAGE AND DRIVER FOR

SPECIFICATION SHEET NUMBER: MS14191 — 20 SEPT 1994 REV E

SUPERSEDING: MS14191D — 31 JULY 1987

AMSC - N/A — FSC 53GP

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:37Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

Form Approved
OMB No 0704-0188

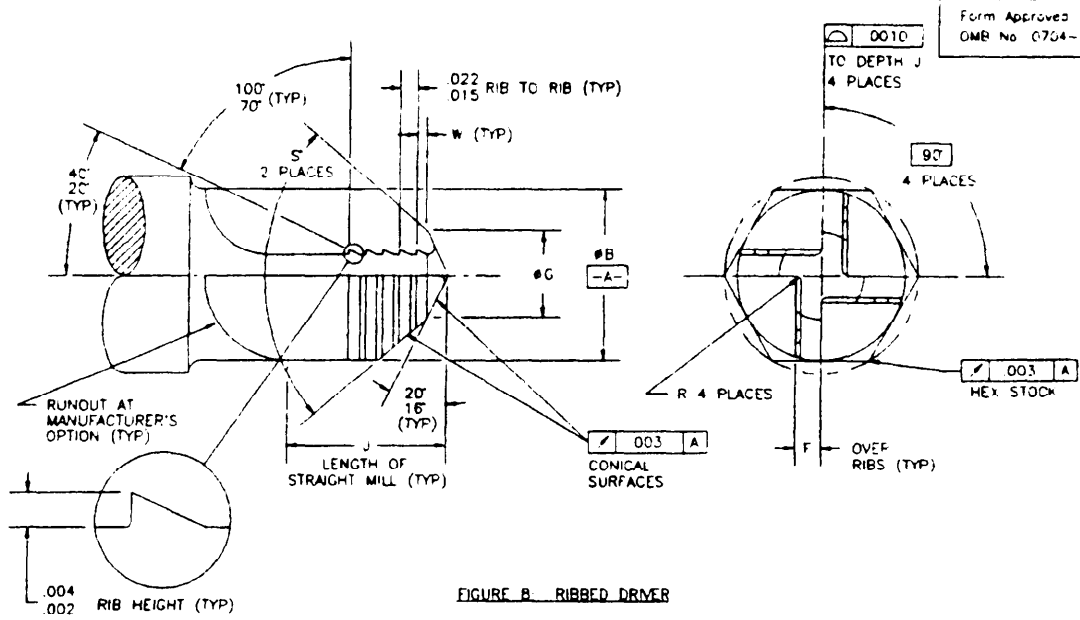


FIGURE 8. RIBBED DRIVER

TABLE VIII. RIBBED DRIVER DIMENSIONS

DRIVER SIZE	øB	F OVER RIBS		øG		J	R		S	W	MIN NO OF RIBS
		MAX	MIN	MAX	MIN	MIN	MAX	MIN		MAX	
6	.185 .180	.0245	.0230	.084	.082	.094	.016	.013	94°30' 92°30'	.015	4
8	.247 .242	.0295	.0280	.098	.096						
10		.0345	.0330	.113	.111	.109	.023	.020			5
1/4	.434 .429	.0465	.0435	.149	.147	.125			91°30' 90°30'	.030	
5/16		.0595	.0565	.187	.185	.141	.028	.023		.035	

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. DRIVERS SHALL HAVE RIBS ON THE REMOVAL WALL OF EACH WING.
3. SEE MIL-B-85643 FOR BIT PROCUREMENT.
4. THE RIBBED DRIVERS IN THIS DOCUMENT ARE COVERED UNDER UNITED STATES PATENT 4,187,892, WHICH EXPIRES 12 FEBRUARY 1997. THE GOVERNMENT DOES NOT HAVE A ROYALTY FREE LICENSE. THESE DRIVERS ARE ALSO PRODUCED AND MARKETED BY THE LICENSEES OF PHILLIPS SCREW COMPANY UNDER THE DESIGNATION OF ACR® MULTI-RIBBED TORQ-SET®.
5. FOR DIMENSIONS OF NON-RIBBED DRIVERS, SIZES 0 THROUGH 5/8 INCH, SEE MS33781.
6. THIS IS A DESIGN SPECIFICATION NOT TO BE USED AS A PART NUMBER.
7. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
8. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY- AV NAVY- AIR FORCE- 99 DLA- REVIEW: IS, 82 USER: PROJECT NUMBER: 53GP-0270	MILITARY SPECIFICATION SHEET TITLE: RECESS, OFFSET CRUCIFORM, RIBBED DIMENSIONS OF RECESS, GAGE AND DRIVER FOR	SPECIFICATION SHEET NUMBER MS14191 20 SEPT 1994 REV E SUPERSEDING MS14191D 31 JULY 1987 AMSC- N/A FSC 53GP
DISTRIBUTION STATEMENT: A. Approved for public release; distribution is unlimited.		Page 5 of 6

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.