AMSC N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

This military standard is approved by the Department of the and shall be used by that activity. All other military activities are required to employ this standard where suitable.

PHYSICAL CHARACTERISTICS

DASH NUMBER	FIGURE	NOMINAL VOLTAGE	NUMBER OF CELLS	NUMBER OF PLATES	AMP. HR. CAPACITY 6 HOUR RATE	MAXIMUM BATTERY DIMENSIONS IN INCHES (CENTIMETERS) LENGTH (X)	WIDTH (Y)	HEIGHT (Z)	WEIGHT FILLED MAXIMUM LBS (KG)
-1	1	36	18	13	510	31 1/8 (79)	19 1/4 (48.9)	22 3/4* (57.8)	1764 (801)
-2	1	36	18	17	680	38 5/8 (98.1)	20 3/8 (51.7)	22 3/4* (57.8)	2313 (1051)
-3	1	36	18	21	850	38 3/4 (98.4)	25 (63.5)	22 3/4* (57.8)	2791 (1268)
-4	2	24	12	11	800	35 7/8 (91.1)	13 3/4 (34.9)	31 (78.7)	1858 (844)
-5	2	24	12	13	870	35 1/2 (90.1)	15 3/4 (40.0)	31 (78.7)	2180 (990)

* WITHOUT COVER, ADD 1-1/2 INCHES (9.6 CENTIMETERS) FOR COVER

FED. SUP CLASS
6140

APPROVED 10 JUNE 1953 REVISED (D) 28 JUNE 1991

P. A.
NAVY - SA
Other Cust
ARMY - ER
AIR FORCE

INTERNATIONAL INTEREST
- 99

TITLE
BATTERY, STORAGE, LEAD ACID, FOR ELECTRIC POWERED INDUSTRIAL TRUCKS AND TRACTORS

MILITARY STANDARD

MS 15367

PROCUREMENT SPECIFICATION
W-B-133

SUPERSEDES:
REVISION (B) DATED 29 JUNE 1964

SHEET 1 OF 6

DD FORM 672-1 (LIMITED COORDINATION)

PHYSICAL CHARACTERISTICS

DASH NUMBER	FIGURE	NOMINAL VOLTAGE	NUMBER OF CELLS	NUMBER OF PLATES	AMP. HR. CAPACITY 6 HOUR RATE	MAXIMUM BATTERY DIMENSIONS IN INCHES (CENTIMETERS)			WEIGHT FILLED MAXIMUM LBS (KG)
						LENGTH (X)	WIDTH (Y)	HEIGHT (Z)	
-6	2	24	12	19	765	26 1/8 (66.3)	22 5/8 (57.5)	22 3/4* (57.7)	1714 (779)
-7	3	12	6	13	510	31 (78.7)	6 5/8 (16.8)	23 1/4 (59)	582 (264)
-8	3	12	6	19	765	22 1/2 (57.1)	13 1/8 (33.3)	23 1/4 (59)	858 (390)
-9	3	12	6	23	935	27 1/8 (68.9)	13 1/8 (33.3)	23 1/4 (59)	1026 (466)
-10	2	24	12	13	510	30 7/8 (78.4)	13 1/8 (33.3)	23 3/8 (59.3)	1026 (466)

* WITHOUT COVER, ADD 1-1/2 INCHES (9.6 CENTIMETERS) FOR COVER

FED. SUP CLASS	6140

APPROVED 10 JUNE 1953 REVISED (D) 28 JUNE 1991

P. A. NAVY - SA Other Cust ARMY - ER AIR FORCE	INTERNATIONAL INTEREST FORCE - 99	TITLE BATTERY, STORAGE, LEAD ACID, FOR ELECTRIC POWERED INDUSTRIAL TRUCKS AND TRACTORS	MILITARY STANDARD MS 15367
PROCUREMENT SPECIFICATION W-B-133	SUPERSEDES: REVISION (B) DATED 29 JUNE 1964		SHEET 2 OF 6

MHE USER SELECTION GUIDE

DASH NUMBER	FORK TRUCKS				WAREHOUSE TRACTORS			REACH TRUCKS			PALLET TRUCKS			PLATFORM TRUCKS	ORDER PICKERS	
	2K LBS. 908 (KG) CAP.	4K LBS. 1816 (KG) CAP.	6K LBS. 2724 (KG) CAP.	8K LBS. 3632 (KG) CAP.	10K LBS. 4540 (KG) CAP.	2K LBS. 908 (KG) CAP.	4K LBS. 1816 (KG) CAP .	3K LB. 1362 (KG) 12-VOLT	3K LB. 1362 (KG) 24 VOLT	4K LB. 1816 (KG)	4K LBS. 1816 (KG) CAP.	6K LBS. 2724 (KG) CAP.	12K LBS. 5448 (KG) CAP.	2K LBS. 908 (KG) CAP.	2.5K LBS. 1135 (KG) CAP.	3.0K LBS 1362 (KG) CAP.
-1	X				X											
-2		X				X										
-3		X	X	X			X								X	X
-4									X						X	X
-5										X						
-6		X												X		
-7											X					
-8								X			X	X				
-9													X			
-10												X				

FED. SUP CLASS
6140

APPROVED 10 JUNE 1955 REVISED (D) 28 JUNE 1991

P. A. NAVY - SA Other Cust ARMY - ER AIR FORCE	INTERNATIONAL INTEREST - 99	TITLE BATTERY, STORAGE, LEAD ACID, FOR ELECTRIC POWERED INDUSTRIAL TRUCKS AND TRACTORS	MILITARY STANDARD MS 15367
PROCUREMENT SPECIFICATION W-B-133	SUPERSEDES: REVISION (B) DATED 29 JUNE 1964		SHEET 3 OF 6

DD FORM 1 MAY 71 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
6140

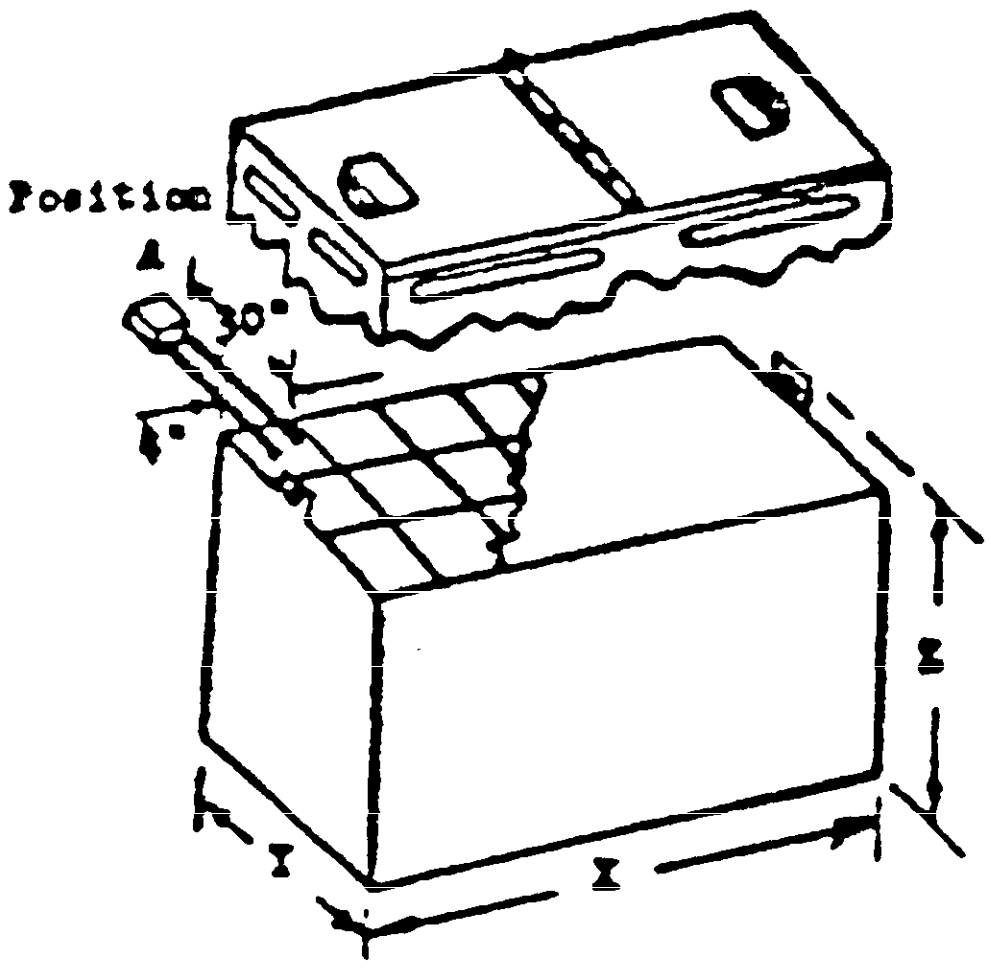

Figure 1. 36 Volt Group

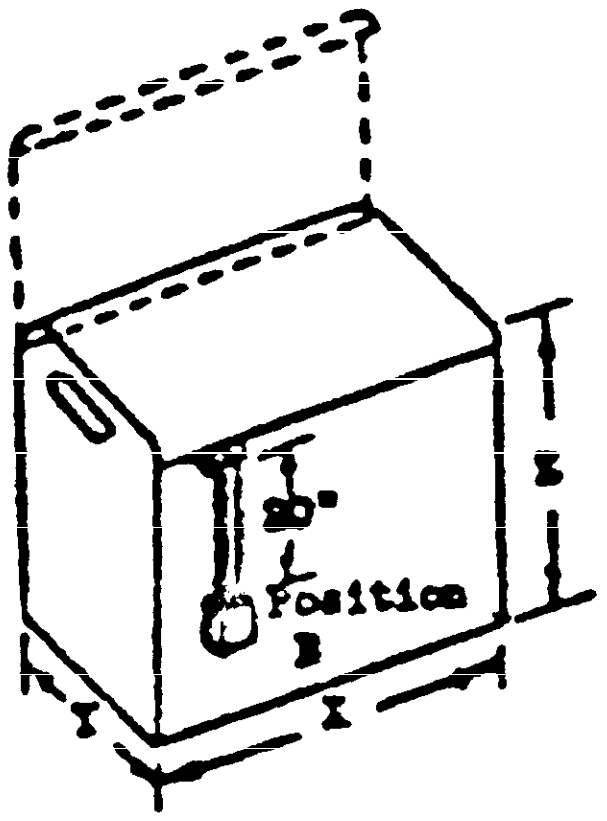

Figure 2. 24 Volt Group



Figure 3. 12 Volt Group

INCHES	CM
4	10.1
20	50.8
30	76.2

NOTE: Position A or position B are acceptable for battery cables.

APPROVED 10 JUNE 1953 REVISED 28 JUNE 1991

This military standard is approved by the Department of the and shall be used by that activity. All other military activities are required to employ this standard where suitable

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - SA Other Cust ARMY - ER AIR FORCE	- 99	BATTERY, STORAGE, LEAD ACID, FOR ELECTRIC POWERED INDUSTRIAL TRUCKS AND TRACTORS	MS 15367

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET
W-B-133	REVISION (C) DATED 30 AUGUST 1985	4 OF 6

FED. SUP CLASS
6140

NOTES:

1. Cell arrangement and intercell connections shall be manufacturer's standard consistent with dimensions shown on Sheet 1 and 2 of this standard.
2. Materials- All materials of the battery shall be in accordance with Federal Specification W-B-133.
3. Unless otherwise specified, 36 volt batteries shall be furnished with covers. Covers, when required, shall be designed to permit each half to be fully opened onto the other half.
4. Unless otherwise specified, 12 volt and 24 volt batteries shall be furnished with covers. Covers shall be flush with battery box when opened 90°.
5. Unless otherwise indicated, cable lead length shall be as shown on Figures 1 through 3.
6. Batteries in the 36 volt and 24 volt group shall be furnished with EC locking half connector. Unless otherwise specified, batteries in the 12 volt group shall be furnished with type YC charging connectors. Batteries which exceed the maximum length, width or height because of lifting ears, cover handle or cover latches will be acceptable, provided these parts do not interfere with the function of the drivers seat or the counterweight of the truck, and provided that no interference occurs during installation, removal or servicing of the battery.
7. Detailed battery dimensions are listed on Sheets 1 and 2 of this standard.
8. Position A cable lead lengths shall be 30 inches without cover and 18 inches with cover. Unless otherwise specified, position A signifies the inside lead be located within 4 inches of the outside edge of battery.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

APPROVED 10 JUNE 1953 REVISED (D) 28 JUNE 1991

NAVY - SA Other Cust ARMY - ER AIR FORCE	INTERNATIONAL INTEREST - 99	TITLE BATTERY, STORAGE, LEAD ACID, FOR ELECTRIC POWERED INDUSTRIAL TRUCKS AND TRACTORS	MILITARY STANDARD MS 15367
PROCUREMENT SPECIFICATION W-B-133	SUPERSEDES: REVISION (C) DATED 30 AUGUST 1985		SHEET 5 OF 6

CUSTODIANS:

ARMY - ER
NAVY - SA
AIR FORCE - 99

REVIEW ACTIVITIES:
NAVY - YD
AIR FORCE - 84
ARMY - ME

USER ACTIVITIES:
DLA - GS

PREPARING ACTIVITY:
NAVY - SA

PROJECT NUMBER: 6140-0721