FED. SUP CLASS
1660

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

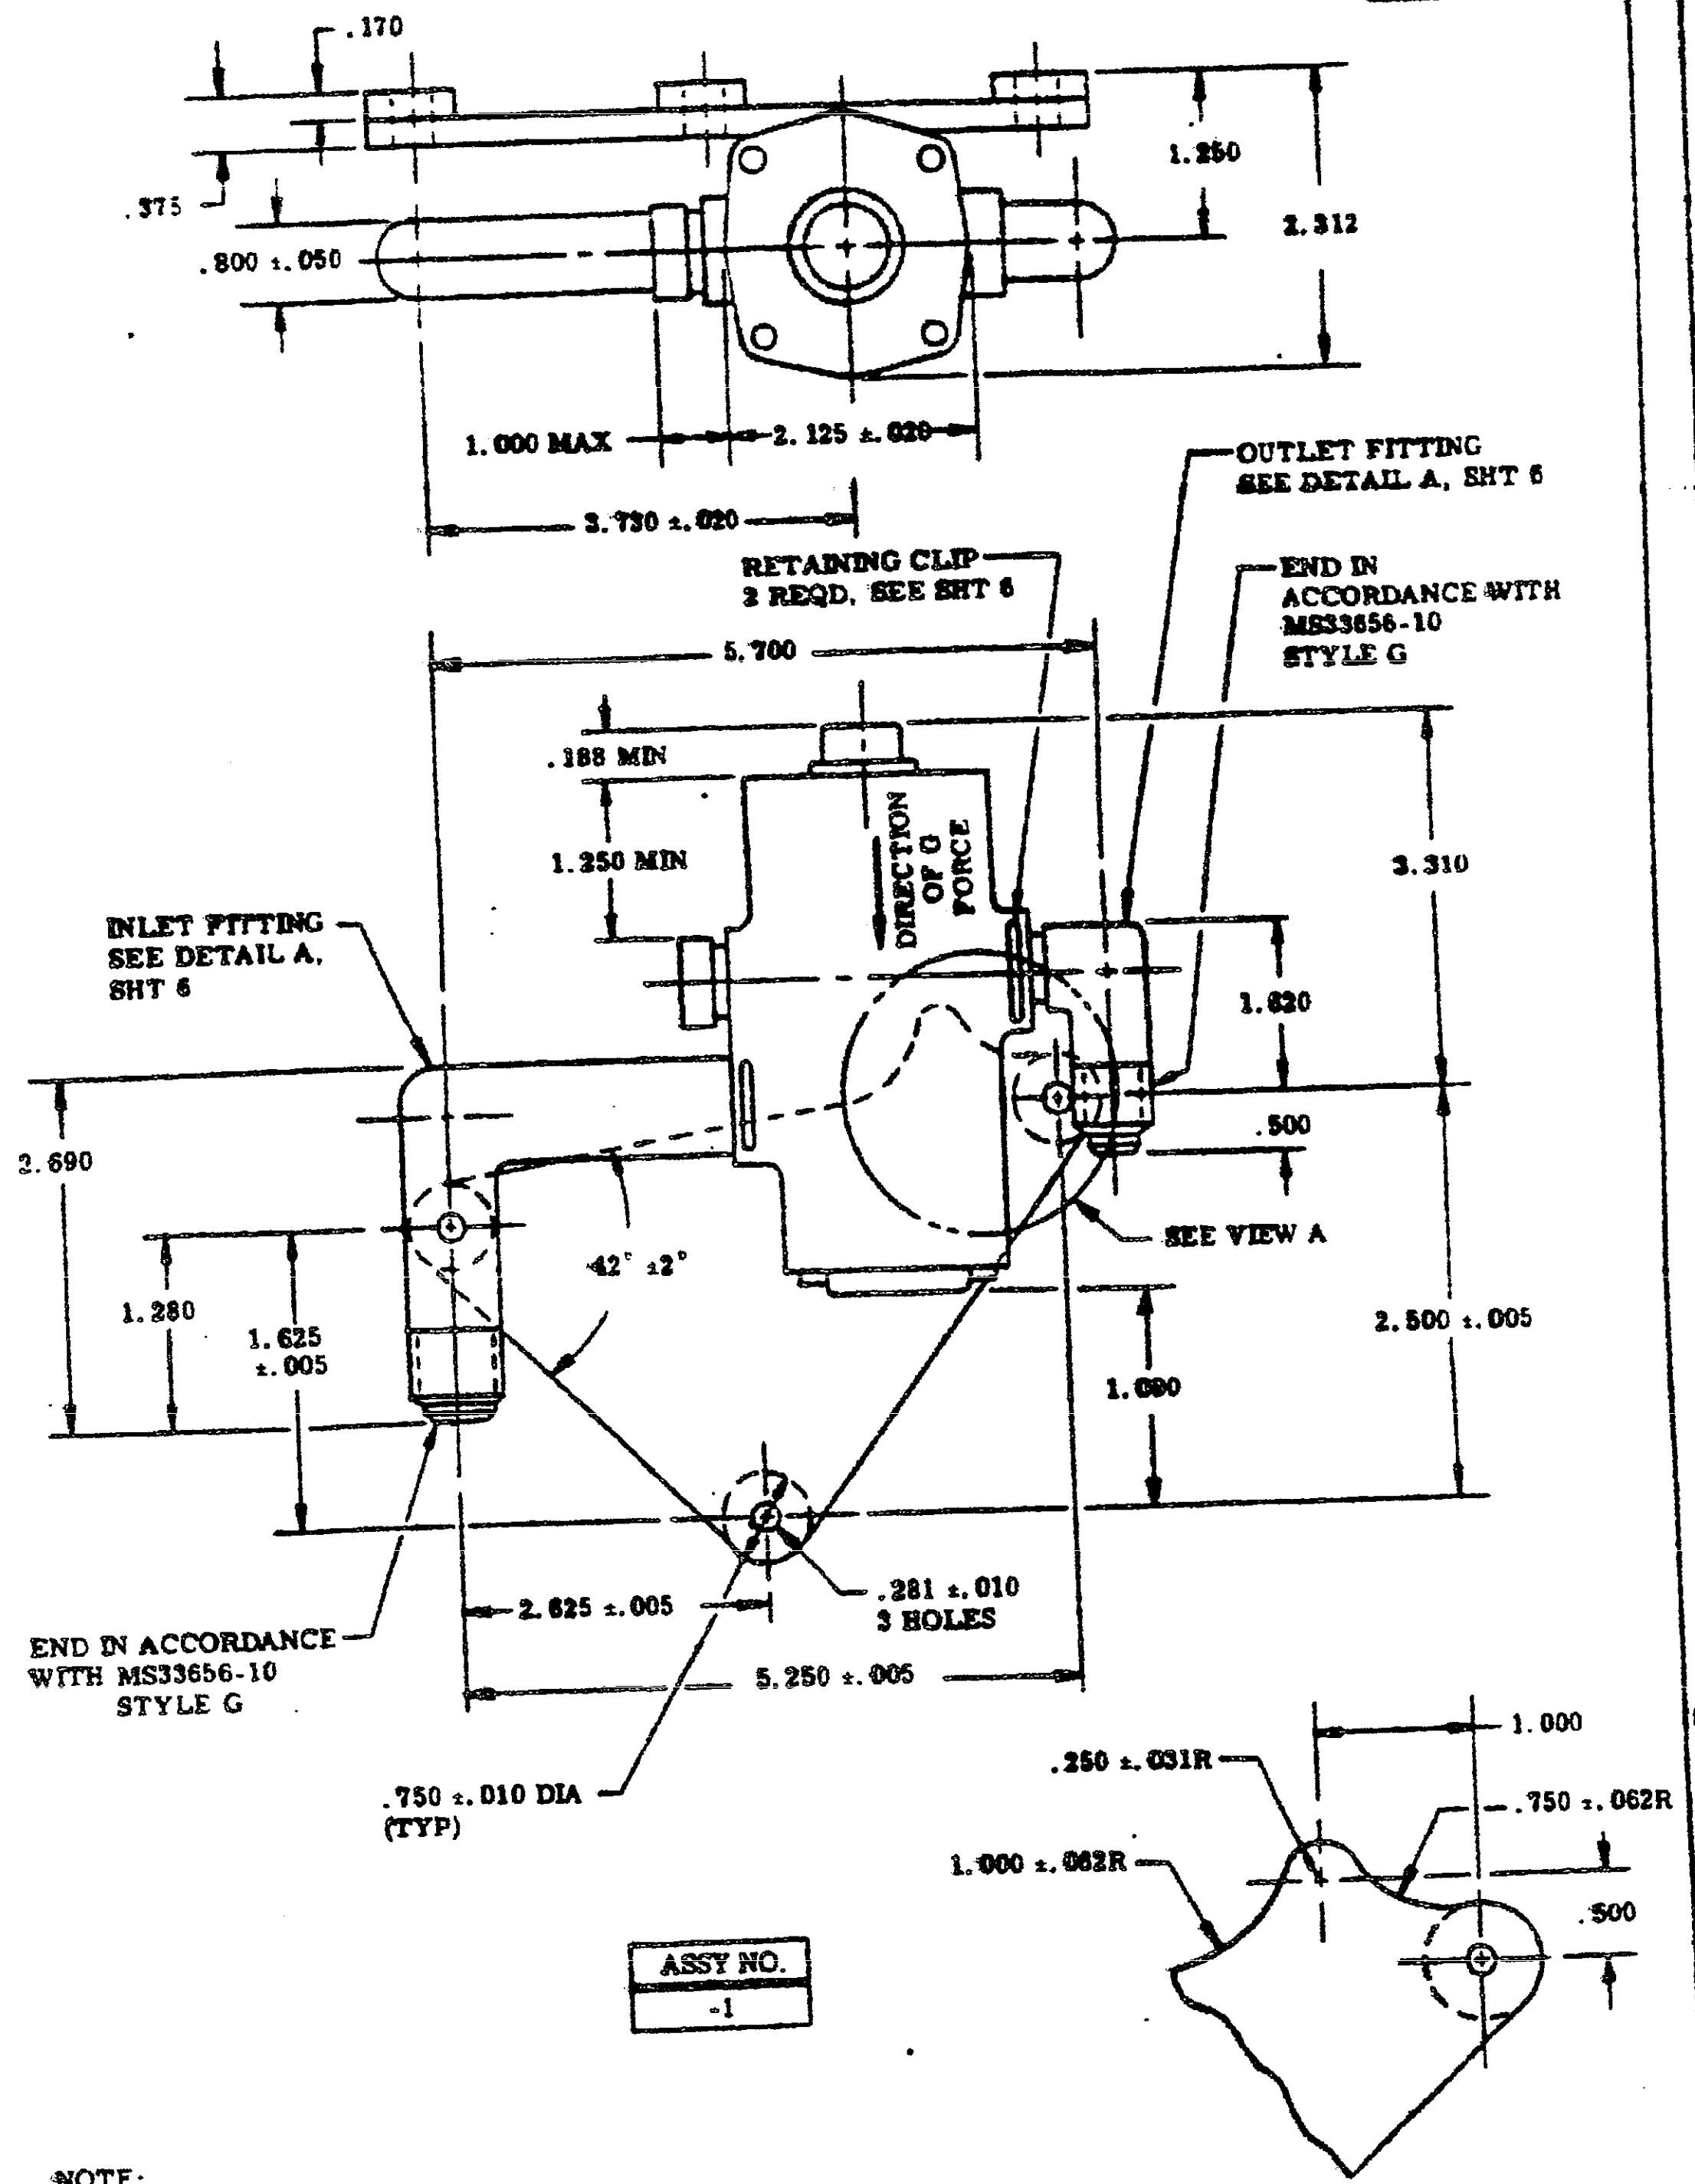
.170
.375
.800 ±.050
1.250
2.312
1.000 MAX
2.125 ±.020
3.730 ±.020
OUTLET FITTING SEE DETAIL A, SHT 6
RETAINING CLIP 2 REQD, SEE SHT 6
END IN ACCORDANCE WITH MS33656-10 STYLE G
5.700
.188 MIN
1.250 MIN
DIRECTION OF G FORCE
3.310
INLET FITTING SEE DETAIL A, SHT 6
1.820
.500
2.690
SEE VIEW A
42° ±2°
1.280
1.625 ±.005
2.500 ±.005
1.090
.281 ±.010 3 HOLES
2.625 ±.005
END IN ACCORDANCE WITH MS33656-10 STYLE G
5.250 ±.005
.750 ±.010 DIA (TYP)
1.000
.250 ±.031R
.750 ±.062R
1.000 ±.062R
.500
ASSY NO.
-1

VIEW A
ENLARGED

NOTE:

FITTINGS SHALL HAVE .040 HORIZONTAL TRAVEL IN LINE OF AXIS OF ROTATION OF FITTING.

Ⓙ ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 20 JAN 56 REVISED Ⓙ 18 FEB 75

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING ANTI-G SUIT	MILITARY STANDARD MS24350 SHEET 1 OF 7
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES NADC DWG CL210A1. USAF DWGS 53C3905, 53C3906, MS24350(ASG)	

DD FORM 1 MAR 77 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED SUP CLASS
1660

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Revision/order information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for use in engineering and design applications and for identified use shall be made from this document.

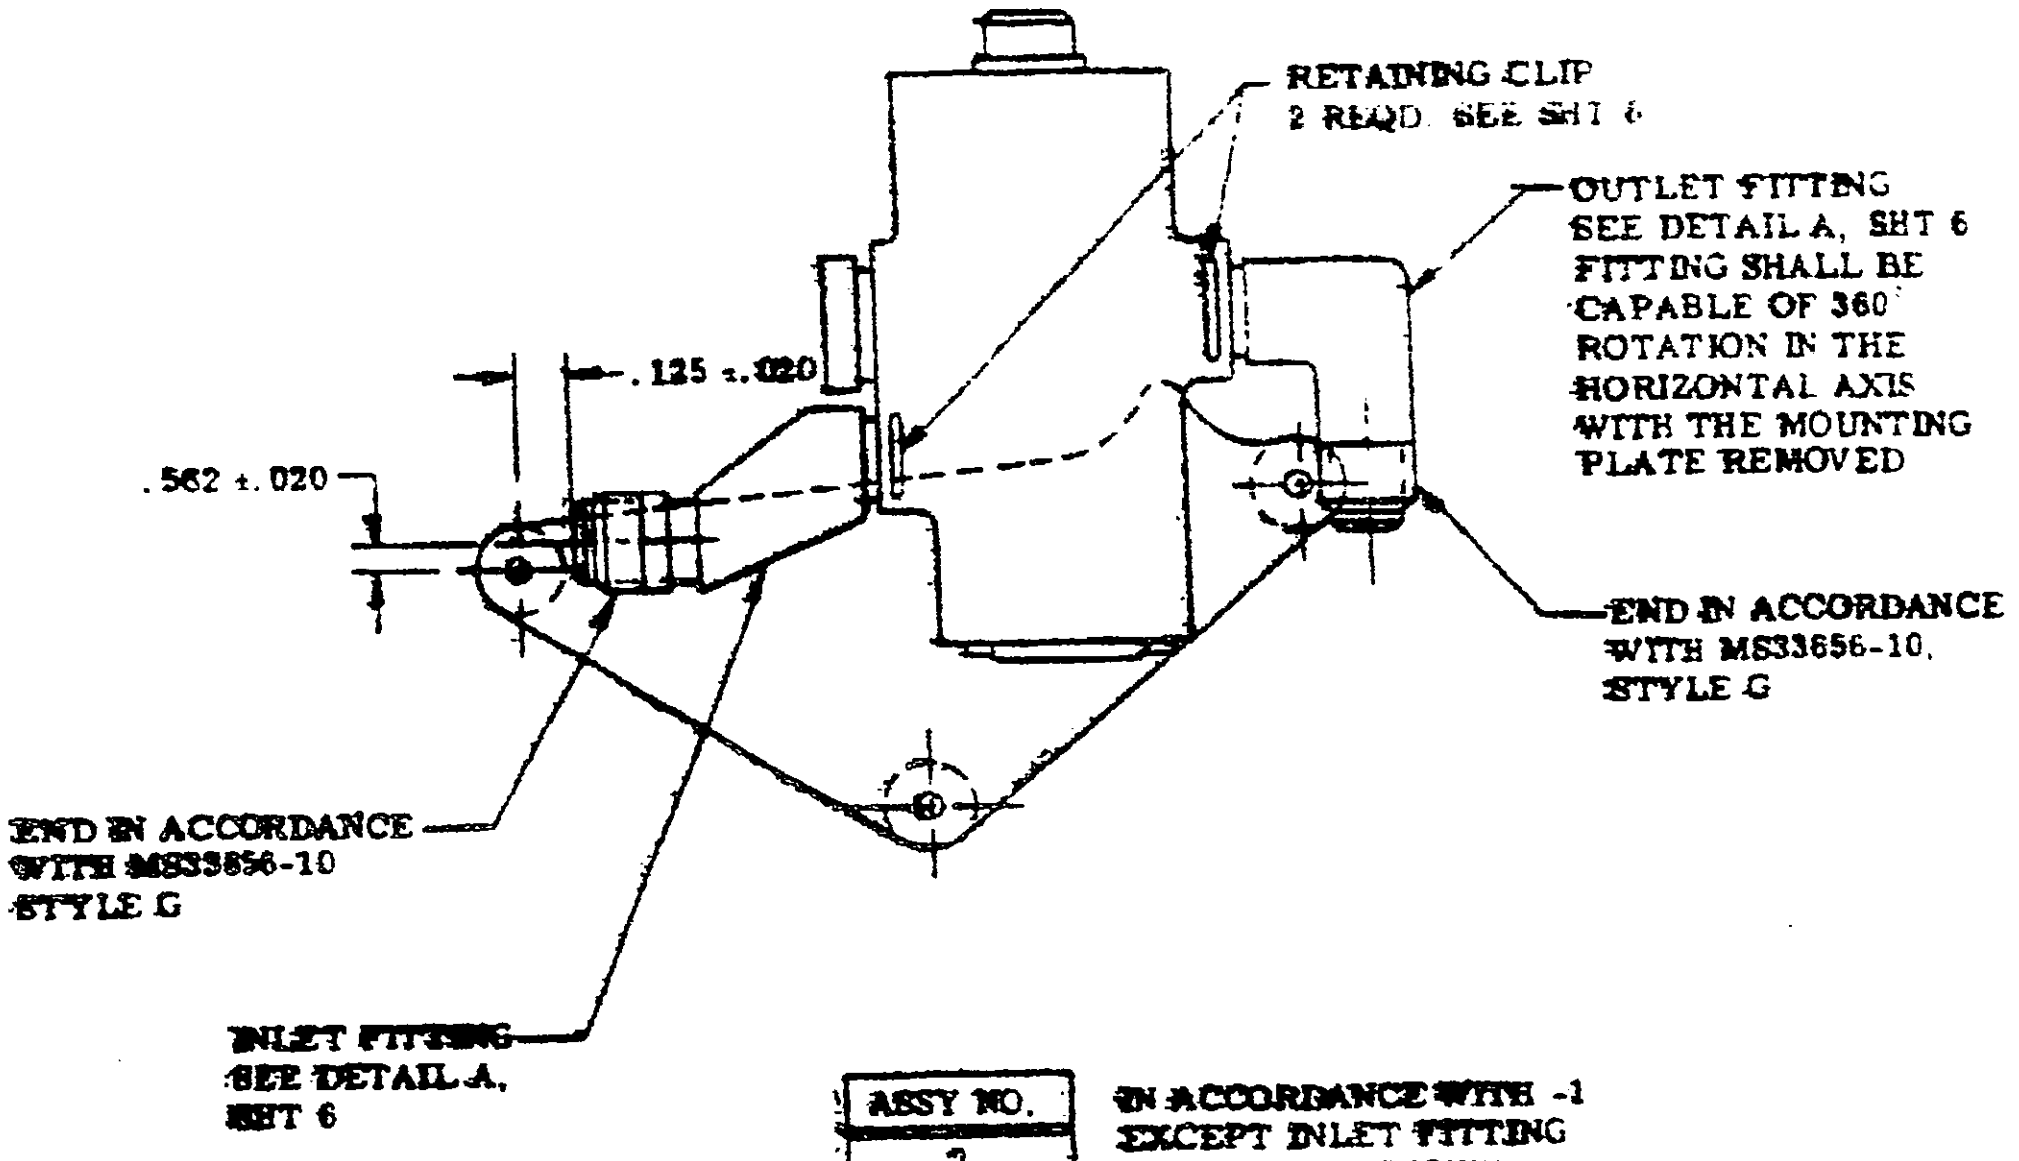

RETAINING CLIP
2 REQD. SEE SHT 6
OUTLET FITTING
SEE DETAIL A, SHT 6
FITTING SHALL BE CAPABLE OF 360° ROTATION IN THE HORIZONTAL AXIS WITH THE MOUNTING PLATE REMOVED
.125 ±.020
.562 ±.020
END IN ACCORDANCE WITH MS33656-10, STYLE G
END IN ACCORDANCE WITH MS33656-10 STYLE G
INLET FITTING SEE DETAIL A, SHT 6

ASSY NO.	
-2	IN ACCORDANCE WITH -1 EXCEPT INLET FITTING SHALL BE AS SHOWN

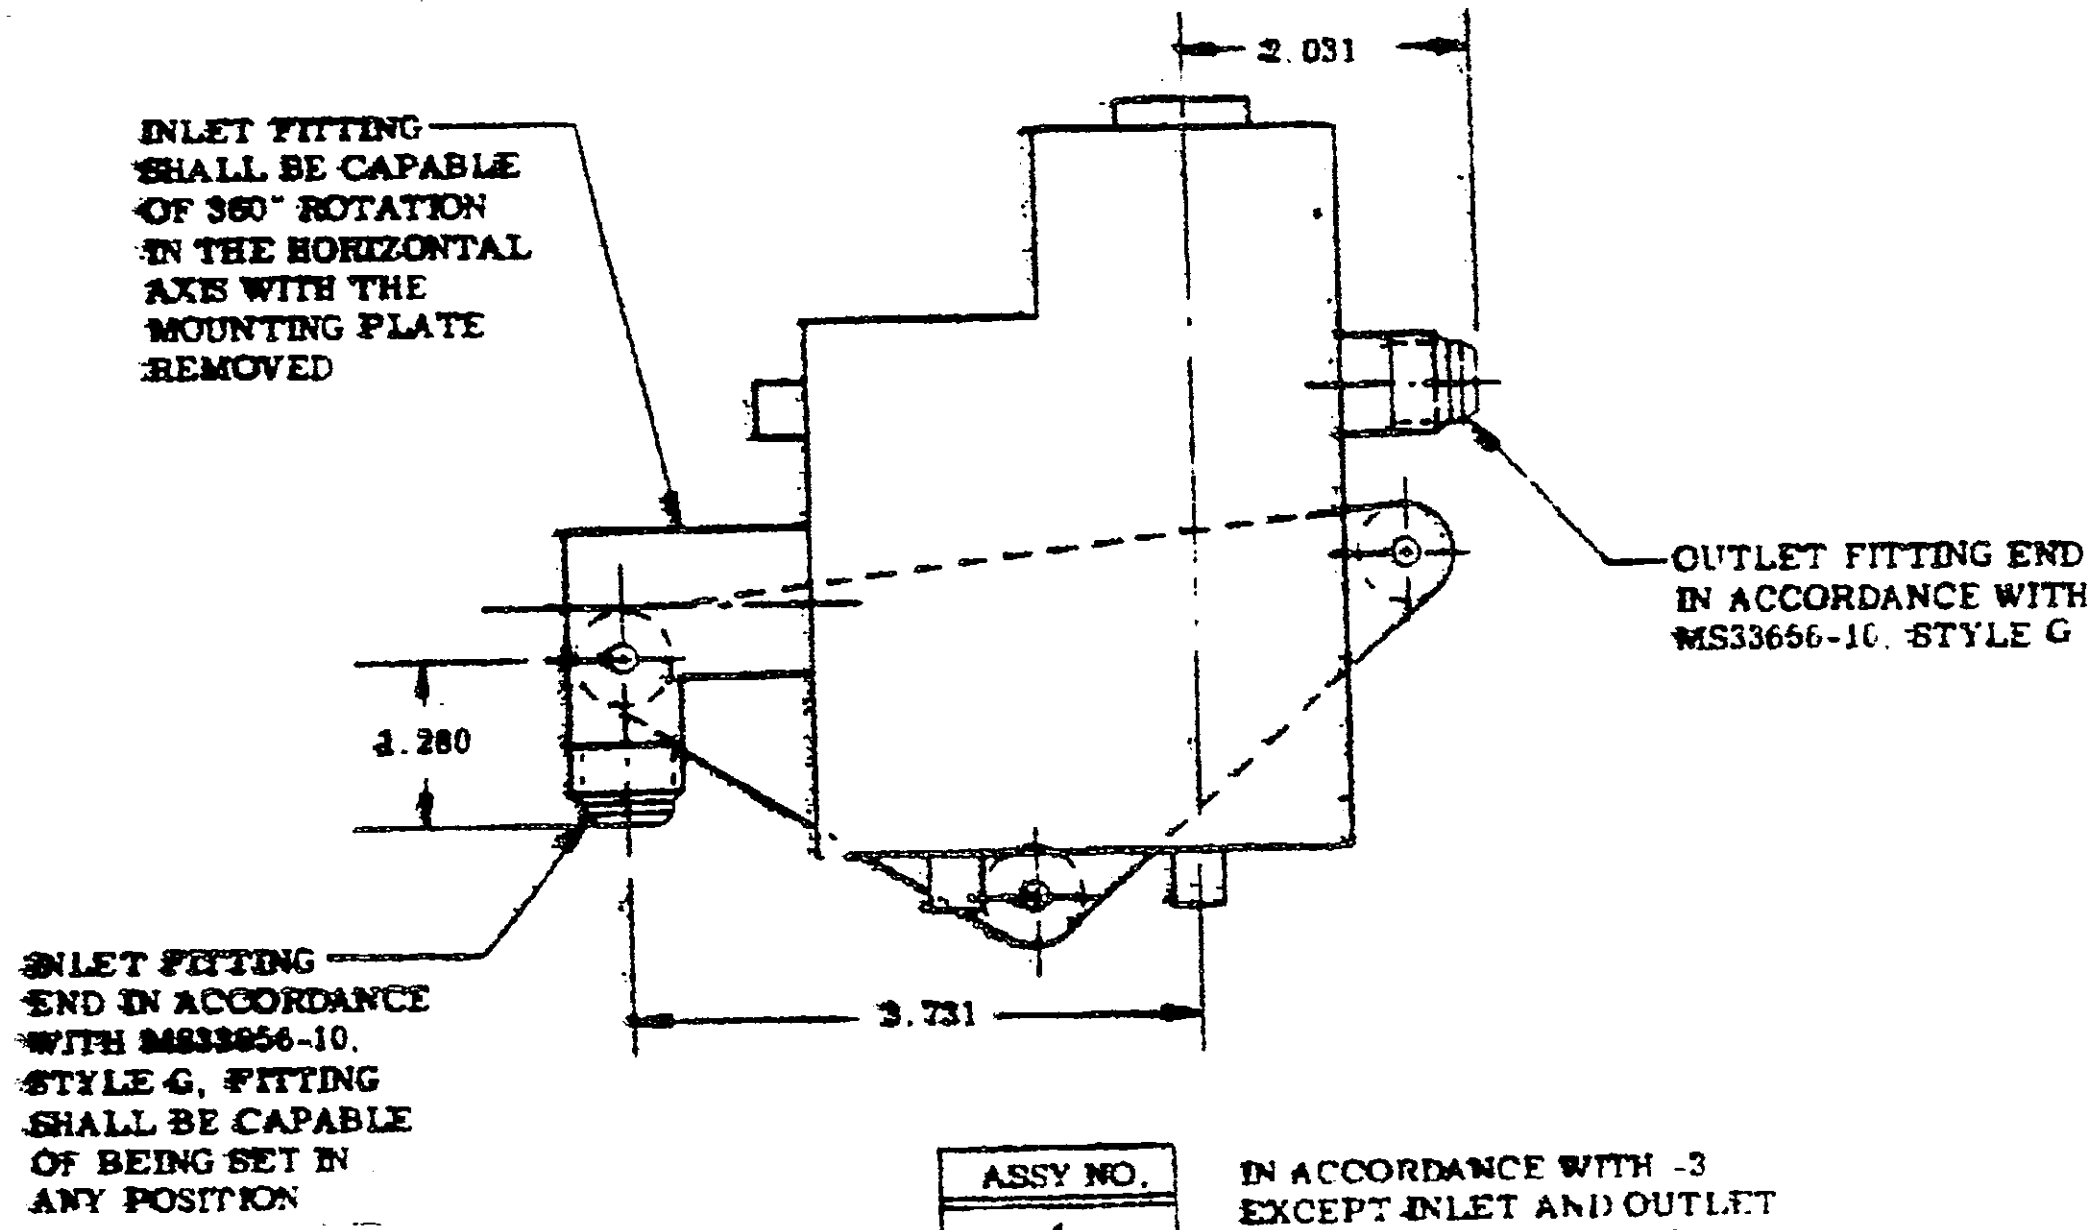

2.031
INLET FITTING SHALL BE CAPABLE OF 360° ROTATION IN THE HORIZONTAL AXIS WITH THE MOUNTING PLATE REMOVED
OUTLET FITTING END IN ACCORDANCE WITH MS33656-10, STYLE G
1.280
3.731
INLET FITTING END IN ACCORDANCE WITH MS33656-10, STYLE G, FITTING SHALL BE CAPABLE OF BEING SET IN ANY POSITION

ASSY NO.	
-4	IN ACCORDANCE WITH -3 EXCEPT INLET AND OUTLET FITTING SHALL BE AS SHOWN

NOTE: FOR -3 ASSY SEE SHEET 3

REVISED (J) FOR CHANGES SEE SHEETS 1 THRU 7

APPROVED 28 JAN 58

P.A. NAVY - AS Other Cust USAF-11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING ANTI-G SUIT	MILITARY STANDARD MS24350
PROCUREMENT SPECIFICATION MIL-V-8370	SUPERSEDES NADC DWG CL210A1. USAF DWGS 53C3905, 53C3906, MS24350(ASG)	SHEET 2 OF 7

PLATE NO

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED SUP CLASS
1660

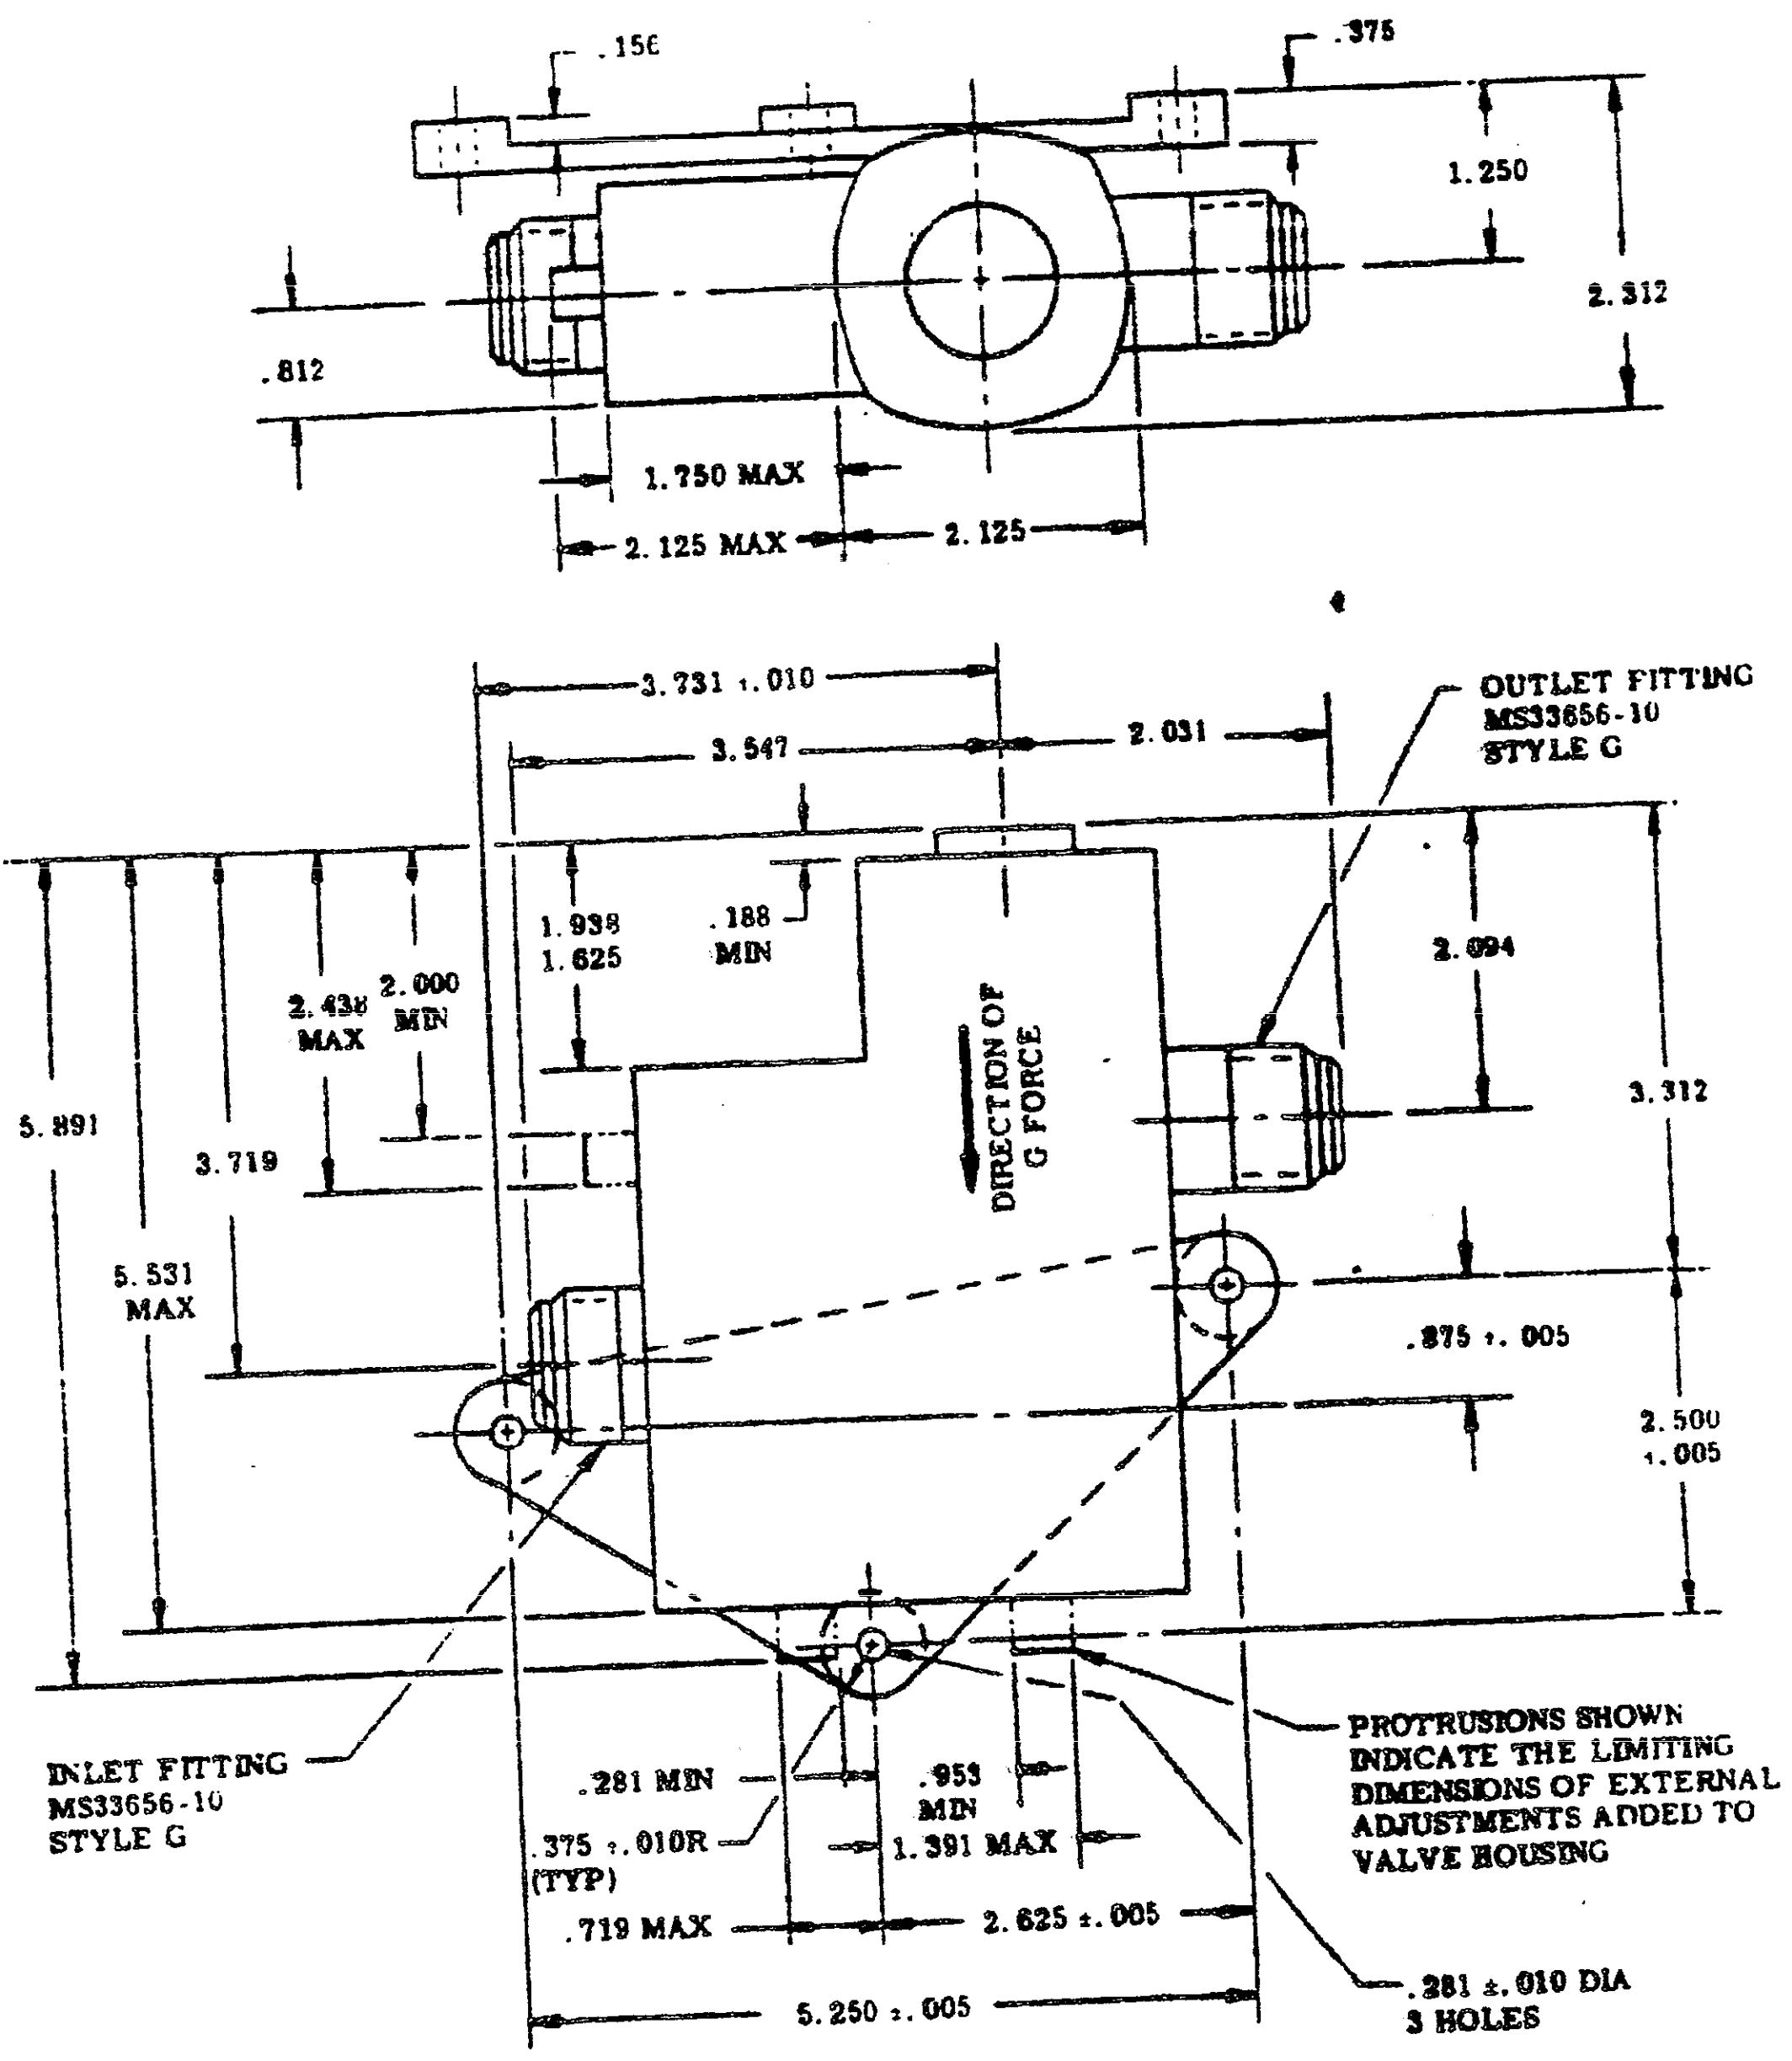

.156
.375
1.250
2.312
.812
1.750 MAX
2.125 MAX
2.125
3.731 ±.010
3.547
2.031
OUTLET FITTING
MS33656-10
STYLE G
1.938
1.625
.188
MIN
2.438
MAX
2.000
MIN
2.094
3.312
DIRECTION OF
G FORCE
5.891
3.719
5.531
MAX
.875 ±.005
2.500
±.005
INLET FITTING
MS33656-10
STYLE G
.281 MIN
.953
MIN
.375 ±.010R
(TYP)
1.391 MAX
.719 MAX
2.625 ±.005
5.250 ±.005
PROTRUSIONS SHOWN
INDICATE THE LIMITING
DIMENSIONS OF EXTERNAL
ADJUSTMENTS ADDED TO
VALVE HOUSING
.281 ±.010 DIA
3 HOLES

ASSY NO.
-3

APPROVED 28 JAN 56 REVISED (J) FOR CHANGES SEE SHEETS 1 THRU 7

[illegible] is approved for use by all Departments [illegible]
[illegible] Department of Defense. No action for [illegible]
[illegible]
[illegible] from this document

P.A NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING ANTI-G SUIT	**MILITARY STANDARD** **MS24350** SHEET 3 OF 7
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES NADC DWG CL210A1, USAF DWGS 53C3905, 53C3906, MS24350(ASG)	

PLATE NO 22866

DD FORM MAR 77 672-1 (Continuation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
1660

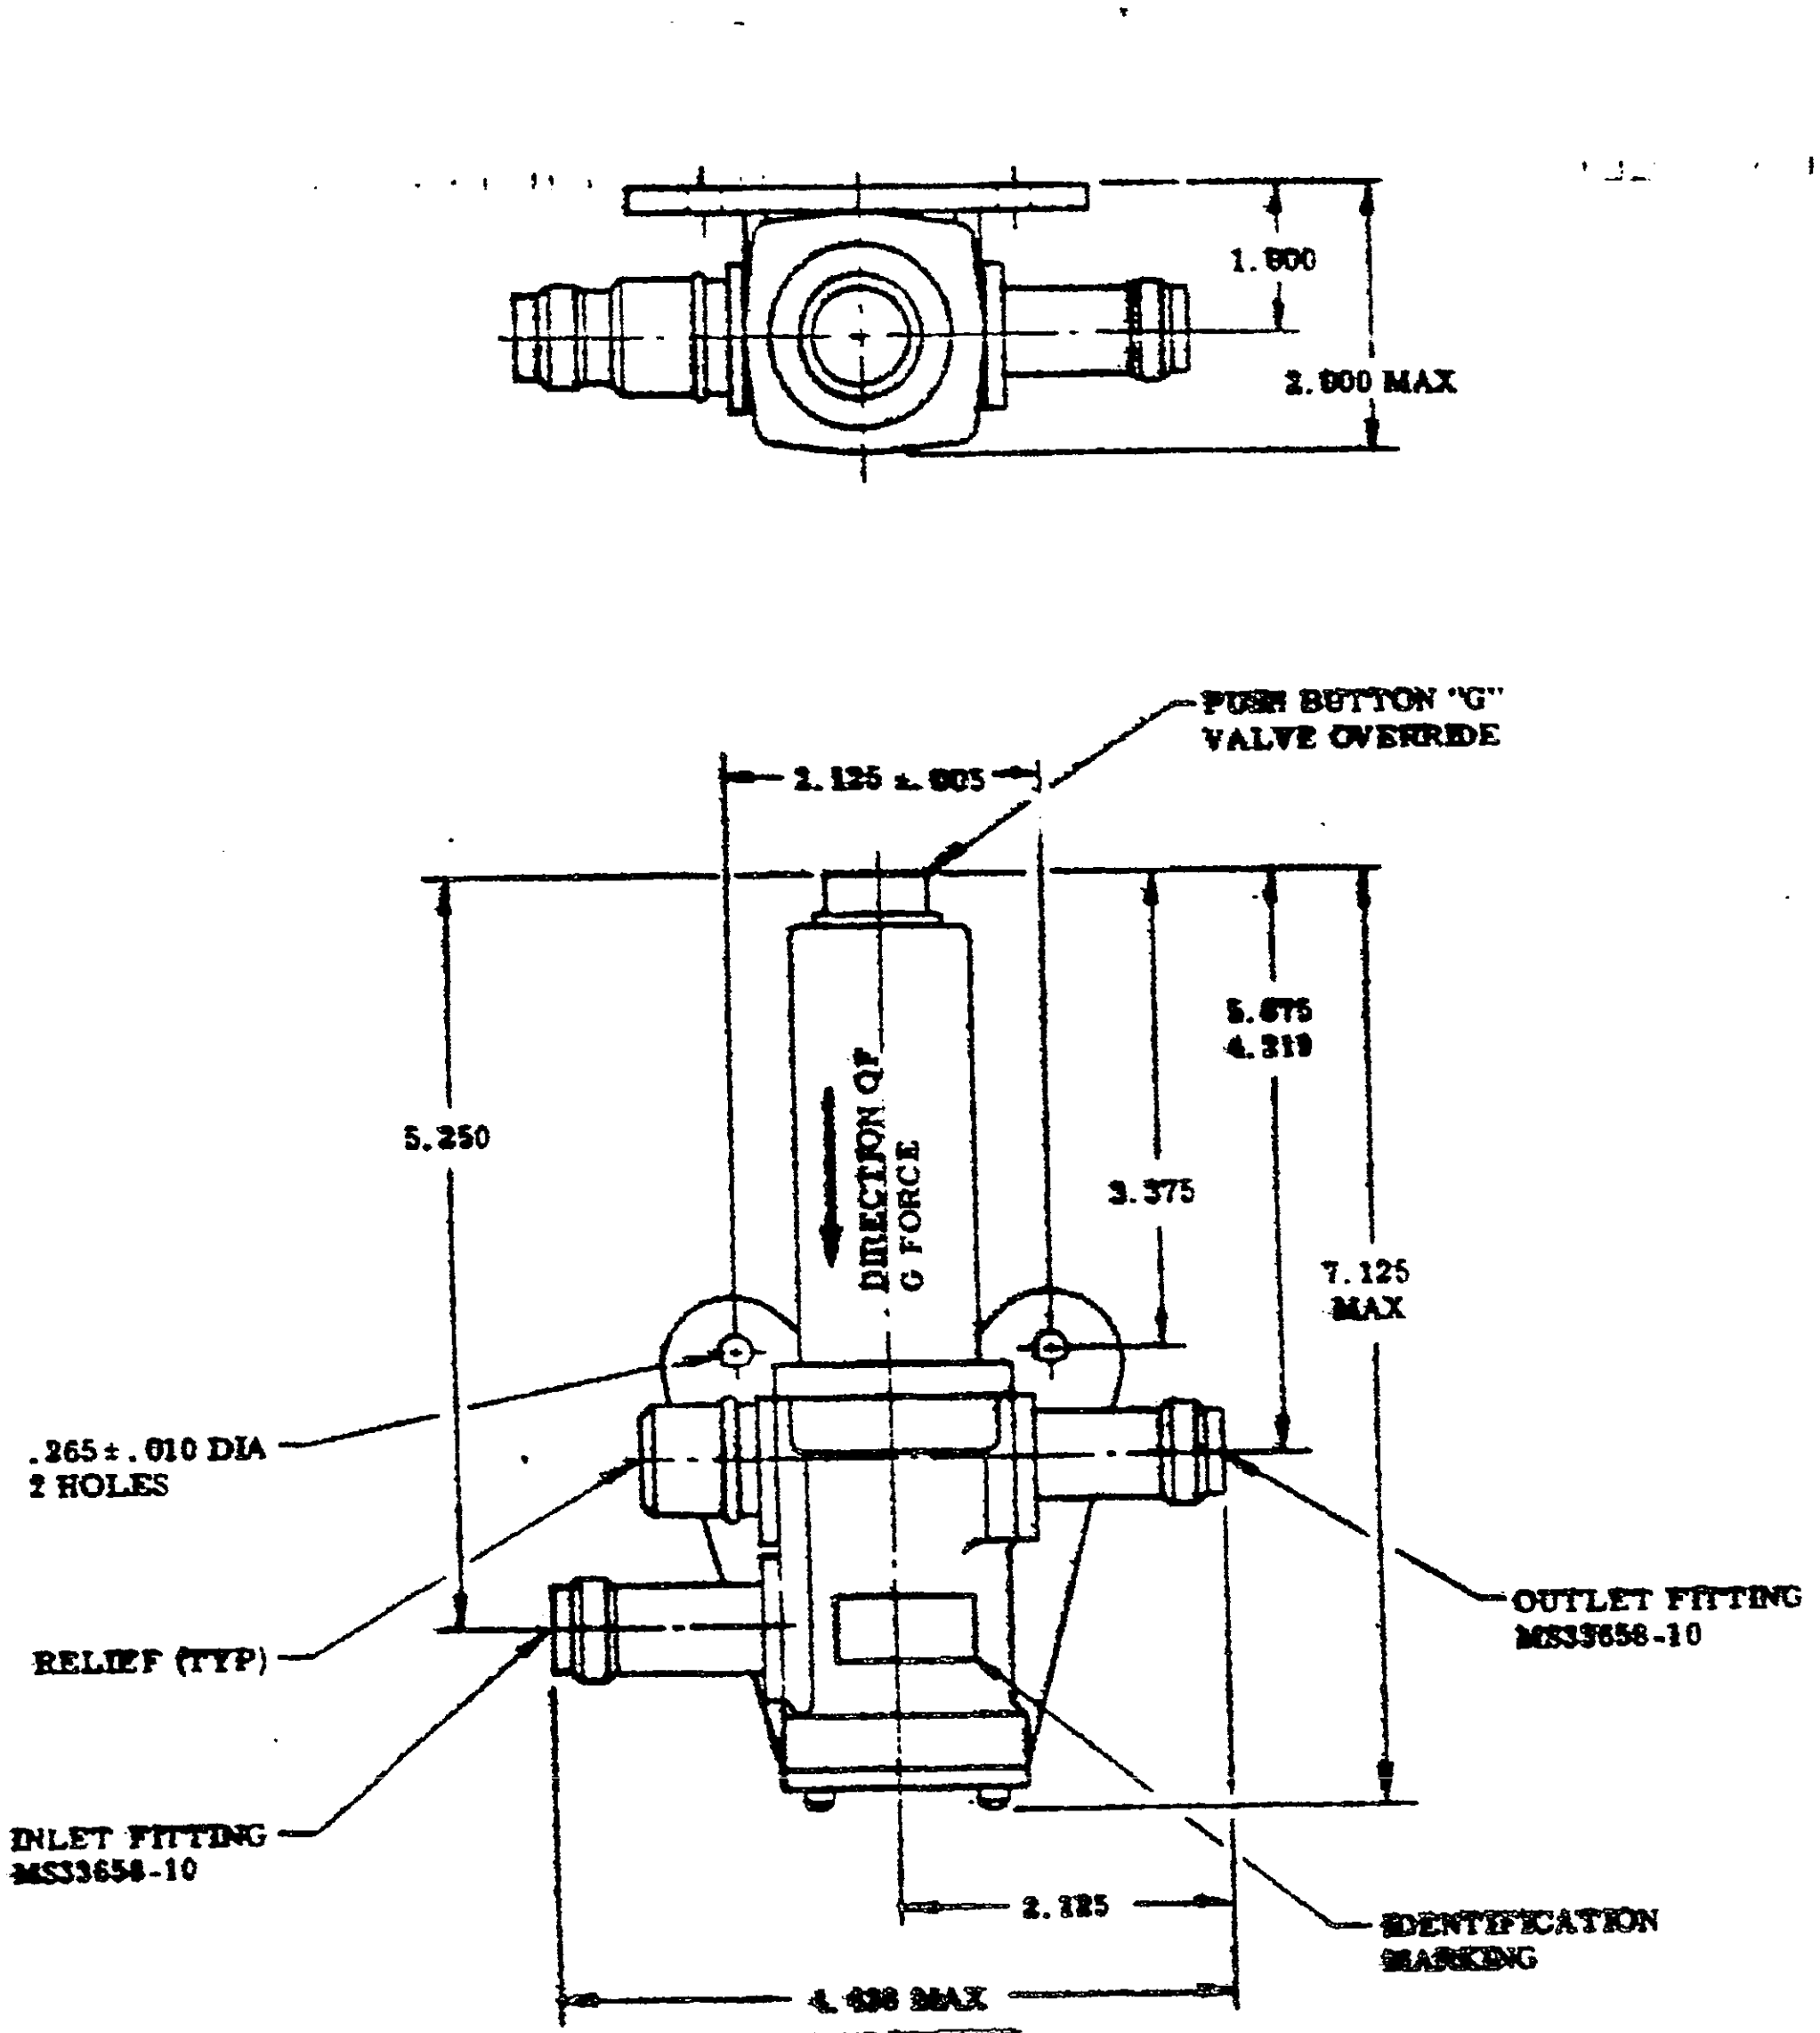
1.800
2.800 MAX
PUSH BUTTON "G" VALVE OVERRIDE
2.125 ± .005
5.250
5.875
4.319
3.375
7.125 MAX
DIRECTION OF G FORCE
.265 ± .010 DIA 2 HOLES
RELIEF (TYP)
OUTLET FITTING MS33658-10
INLET FITTING MS33658-10
2.125
IDENTIFICATION MARKING
4.438 MAX

ASSY NO.
-5

PART NUMBER MS24350-6 INACTIVE FOR PROCUREMENT. MS24350-7 REPLACES AND IS INTERCHANGEABLE WITH MS24350-6. DO NOT REPLACE MS24350-7 WITH MS24350-6.

ASST NO.
-6

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

USER SYMBOLS:

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 28 JAN 58 REVISED (J) FOR CHANGES SEE SHEETS 1 THRU 7

P.A. NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING, ANTI-G SUIT	MILITARY STANDARD MS24350
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES NADC DWG. CL210A1 USAF DWGS 53C3905, 53C3906, MS24350(ASG)	SHEET 4 OF 7

PLATE NO. 15320

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED SUP CLASS
1660

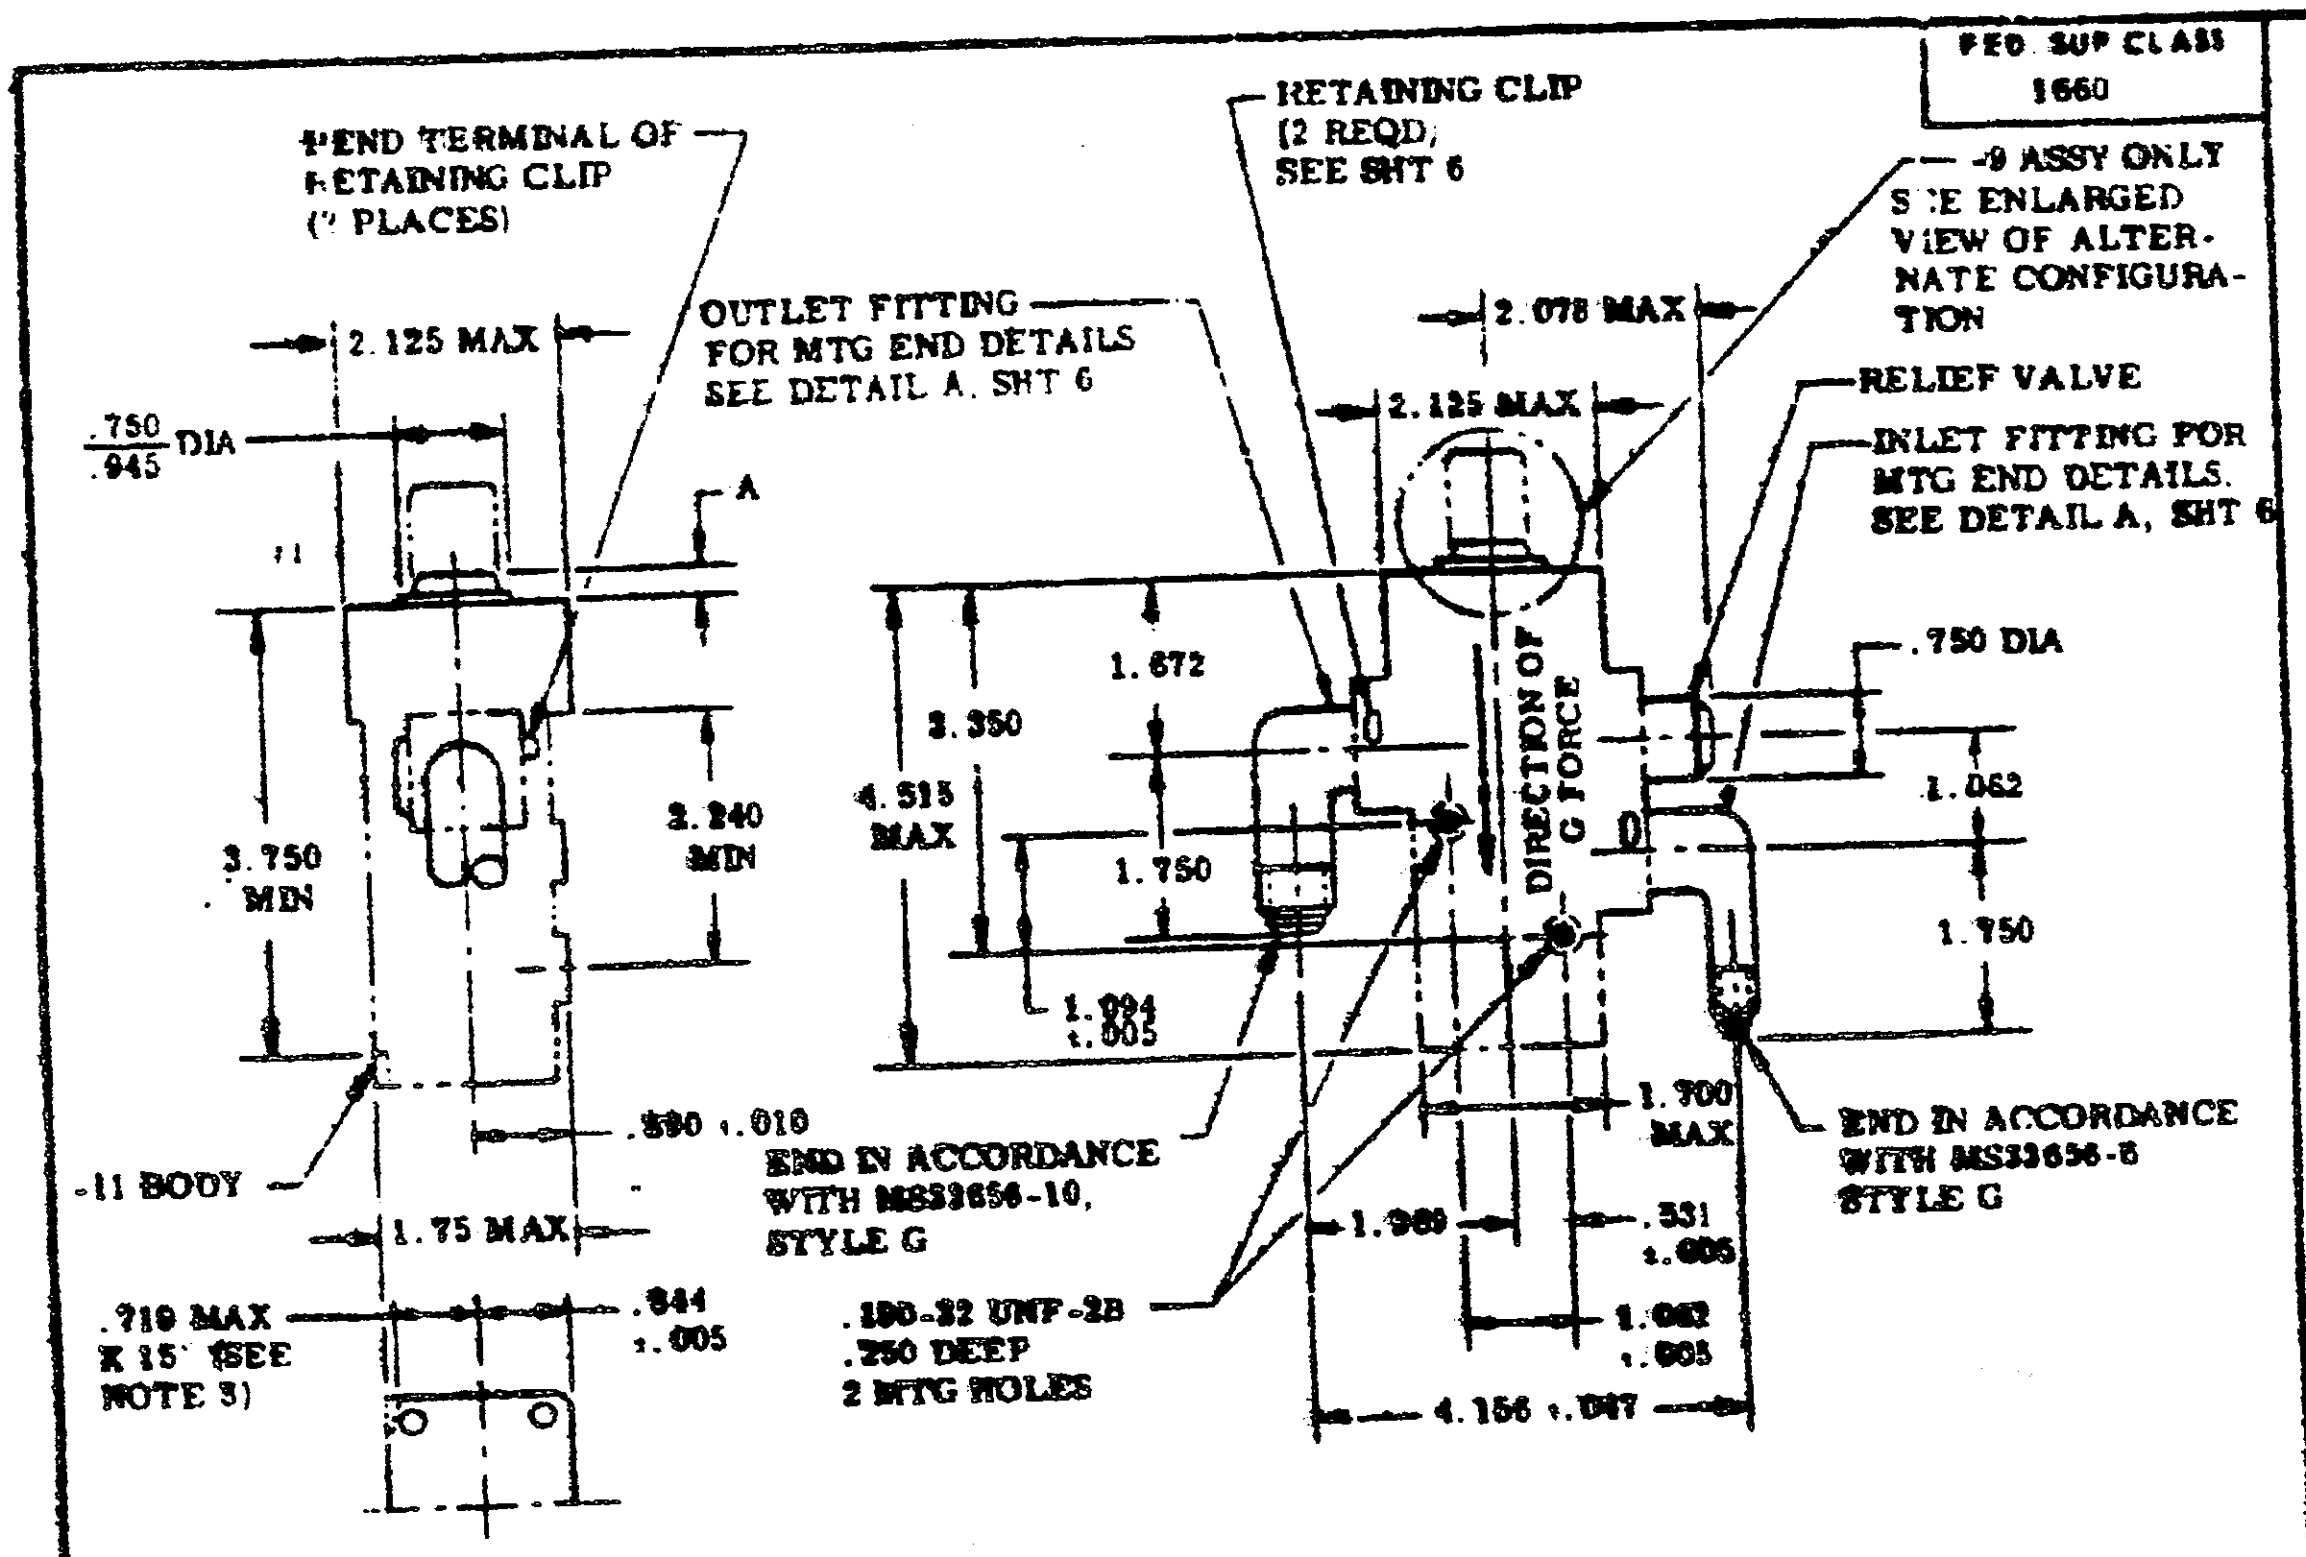
BEND TERMINAL OF RETAINING CLIP (2 PLACES)
2.125 MAX
.750 / .945 DIA
A
3.750 MIN
3.240 MIN
-11 BODY
.590 ±.010
1.75 MAX
.719 MAX X 15° (SEE NOTE 3)
.844 ±.005
OUTLET FITTING FOR MTG END DETAILS SEE DETAIL A, SHT 6
RETAINING CLIP (2 REQD) SEE SHT 6
-9 ASSY ONLY SEE ENLARGED VIEW OF ALTERNATE CONFIGURATION
2.078 MAX
2.125 MAX
RELIEF VALVE
INLET FITTING FOR MTG END DETAILS. SEE DETAIL A, SHT 6
.750 DIA
1.672
3.350
4.515 MAX
1.750
1.094 ±.005
DIRECTION OF G FORCE
1.062
1.750
1.700 MAX
END IN ACCORDANCE WITH MS33656-6 STYLE G
END IN ACCORDANCE WITH MS33656-10, STYLE G
.190-32 UNF-2B .250 DEEP 2 MTG HOLES
1.969
.531 ±.005
1.062 ±.005
4.156 ±.047

INLET AND OUTLET FITTINGS SHALL BE CAPABLE OF BEING SET IN ANY POSITION EXCEPT WHERE RELIEF VALVE INTERFERES WITH INLET FITTING.



FOR -9 ASSY
ENLARGED VIEW

ASSY NO.	A
-7	.220
-9	1.261

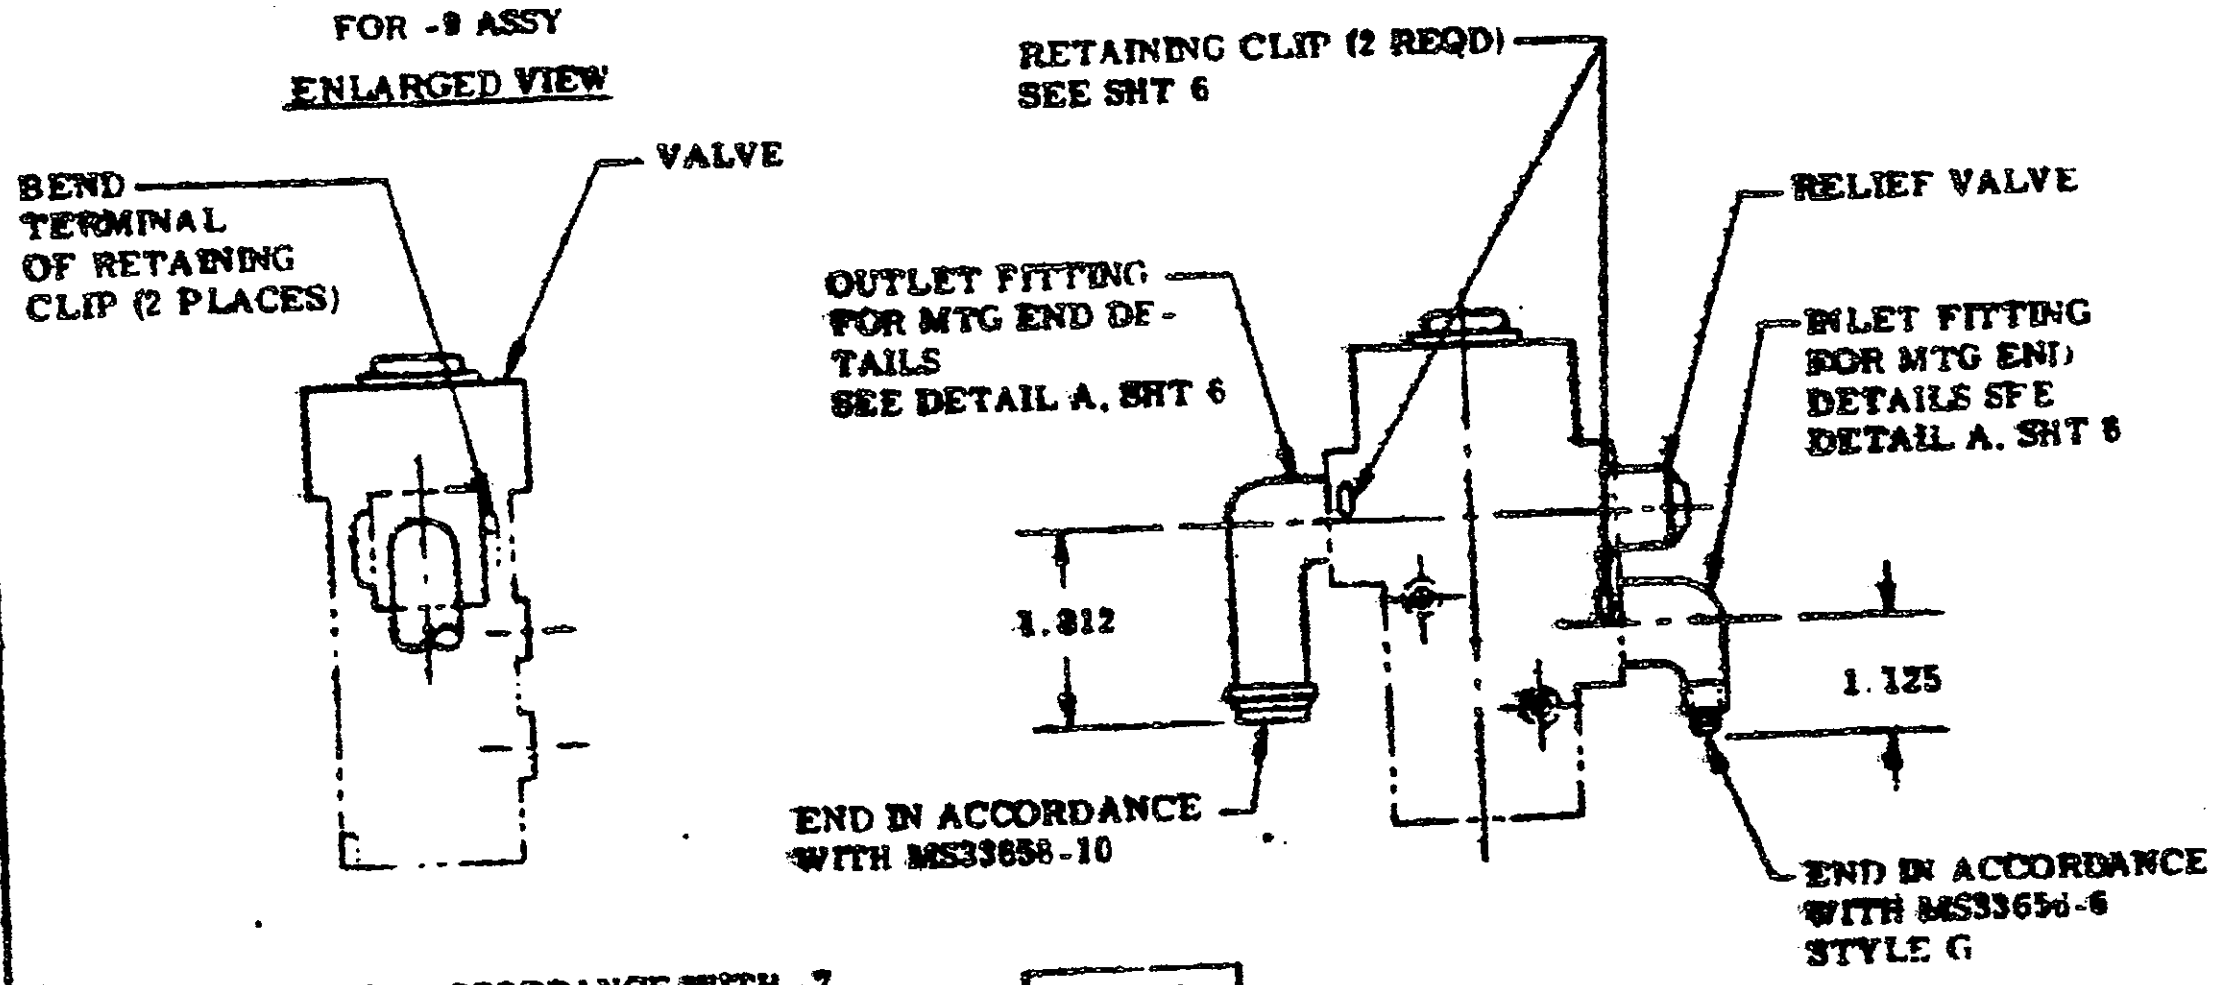
BEND TERMINAL OF RETAINING CLIP (2 PLACES)
VALVE
RETAINING CLIP (2 REQD) SEE SHT 6
RELIEF VALVE
OUTLET FITTING FOR MTG END DETAILS SEE DETAIL A, SHT 6
INLET FITTING FOR MTG END DETAILS SEE DETAIL A, SHT 6
1.812
1.125
END IN ACCORDANCE WITH MS33656-10
END IN ACCORDANCE WITH MS33656-6 STYLE G

IN ACCORDANCE WITH -7 EXCEPT INLET AND OUTLET FITTING SHALL BE AS SHOWN

ASSY NO.
-8

APPROVED 26 JAN 58 REVISED (7) FOR CHANGES SEE SHEETS 1 THRU 7

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This [illegible] is approved for use by all [illegible] Department of Defense. Selection [illegible] and for [illegible]

P.A. NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING ANTI-G SUIT	MILITARY STANDARD MS24350 SHEET 5 OF 7
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES NADC DWG CL210A1 USAF DWGS 53C3905, 53C3906 MS24350(ASC)	

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
166?

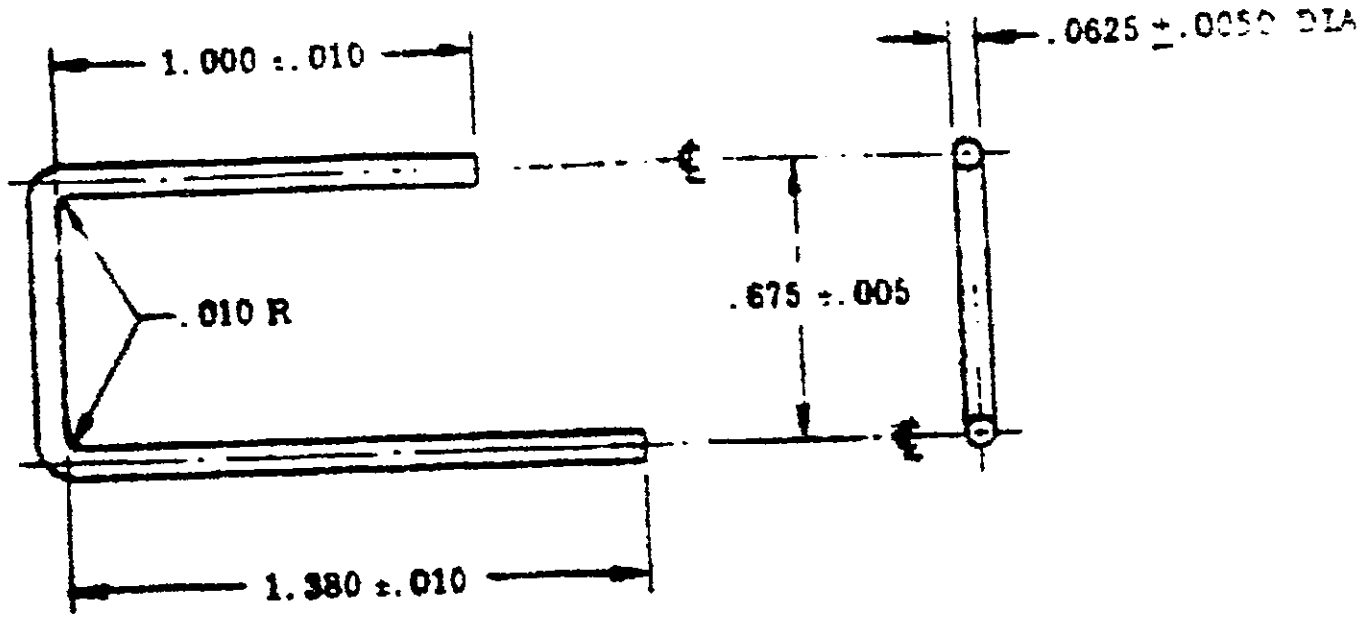

RETAINING CLIP

USED ON VALVE ASSEMBLIES -1, -2, -7, -8, -9

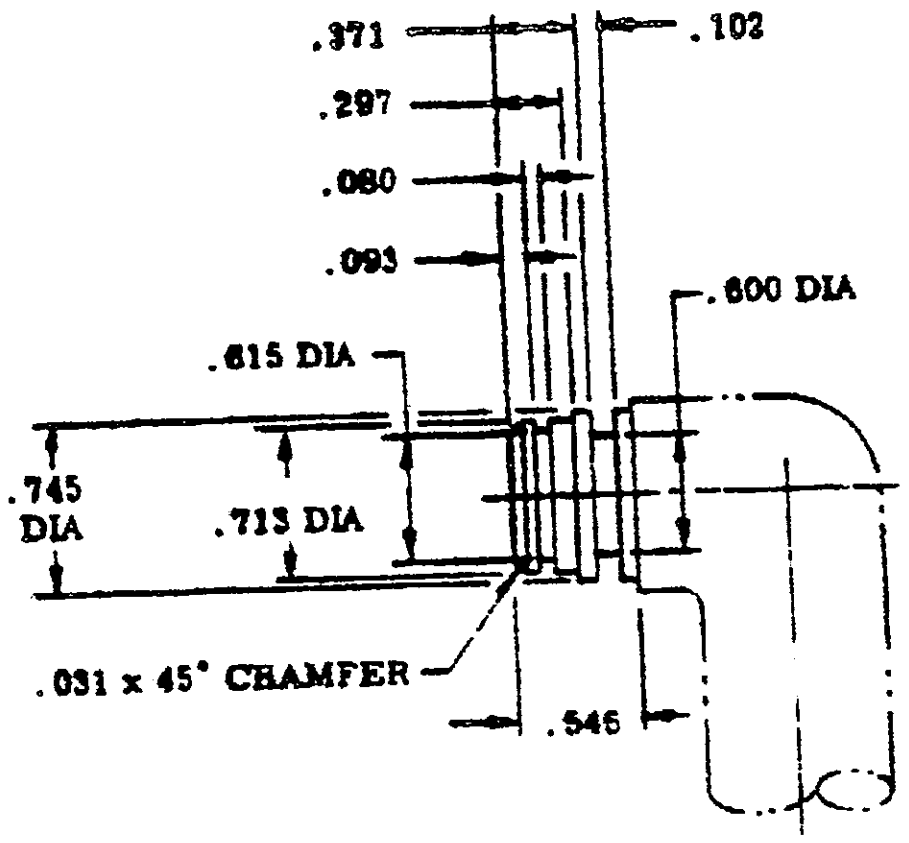

NOTE: (DETAIL A ONLY)
DIMENSIONS IN INCHES. TOLERANCE ±.010.
DIAMETERS SHALL BE SQUARE AND CONCENTRIC WITHIN .003 TIR.

DETAIL A
(ENLARGED)

VALVE MATING END DETAILS FOR INLET AND OUTLET FITTINGS

APPROVED 26 JAN 56 REVISED (1) FOR CHANGES SEE SHEETS 1 THRU 7

P.A. NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING, ANTI-G SUIT	MILITARY STANDARD MS24350
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES: NADC DWG. CL210A1 USAF DWGS 53C3905, 53C3906, MS24350(ASG)	SHEET 6 OF 7

DD FORM 1 MAR 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
1660

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11, 71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DOD199."

This [illegible] has been approved for use by all Departments and Agencies of the Department of Defense. Selection for use [illegible] and for [illegible] and shall be made from this document.

NOTES:

1. MATERIAL: RETAINING CLIP SHALL BE STEEL, CORROSION RESISTANT, (18-8) IN ACCORDANCE WITH MIL-S-7720, COMPOSITION 302, PHYSICAL CONDITION A.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031, ANGLES ±1/2°. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH USASI Y14.5.
3. SURFACE TEXTURE FOR INLET AND OUTLET FITTINGS SHALL BE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, THE SURFACE TEXTURE SHALL NOT EXCEED 63 MICROINCHES.
4. THREADS SHALL BE IN ACCORDANCE WITH MIL-S-7742.
5. INLET AND OUTLET PORTS SHALL BE PERMANENTLY IDENTIFIED.
6. WEIGHT PER ASSEMBLY, 3 POUNDS MAXIMUM.
7. PASSIVATE RETAINING CLIP IN ACCORDANCE WITH QQ-P-35.
8. TAPER REQUIRED ONLY IF THE BASE OF THE BODY EXCEEDS THE .719 DIMENSION AS SHOWN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 26 JAN 56 REVISED (1) FOR CHANGES SEE SHEETS 1 THRU 7

P.A. NAVY - AS Other Cust USAF - 11	TITLE VALVE, AUTOMATIC PRESSURE REGULATING ANTI-G SUIT	**MILITARY STANDARD** **MS24350**
PROCUREMENT SPECIFICATION MIL-V-9370	SUPERSEDES NADC DWG CL210A1. USAF DWGS 53C3905 53C3906 MS24350(ASG)	SHEET 7 OF 7

PLATE NO. 2005

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE