INCH-POUND

MS24356E
18 April 2016
SUPERSEDING
MS24356D
12 February 1963

DETAIL SPECIFICATION SHEET

NOZZLE – TYPE MA-2, FLIGHT PRESSURE REFUELING

Reactivated after 18 April 2016, and may be used for new and existing designs and acquisitions.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the procurement specifications MIL-N-25161.

Comments, suggestions, or questions on this document should be addressed to Air Force Sustainment Center - Oklahoma City/AFLCMC/LZPES, 3001 Staff Drive, Suite 1AB81A, Tinker AFB, OK 73145 or emailed to ocalc.dsp@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 1680

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Where specified, surface roughness 63√, ASME-B46.1.

2. Remove all burrs and break sharp edges .010 to .020.

3. Dimensions in inches. Unless otherwise specified, tolerances: Decimals +/- .010, Angles +/- 1/2 degree.

4. At assembly where nozzle is threaded into the probe mast nose, MS24359, lock securely in place with the lock ring, MS24360-1, 1 required

5. For use with coupling MS24355-1

NOTES:

This specification sheet implements STANAG-3447, Aerial Refueling Equipment Dimensional and Functional Characteristics. When amendment, revision, or cancellation of this specification sheet is proposed, the preparing activity must coordinate the action with the U.S. National Point of Contact for the International Standardization Agreement, as identified in the ASSIST database at https://assist.dla.mil.

This document references the following:

MIL-N-25161, Nozzle, Aerial Pressure Refueling, Type MA-2
MS24359, Nose, Probe Mast - Type MA-2, Flight Pressure Refueling Nozzle, Outline Dimensions for (ASG)
MS24360, Ring, Lock Flight Pressure Refueling Nozzle
MS24355, Coupling, Reception - Type MA-2, Flight-Pressure-Refueling, Assembly of (ASG)

(Copies of these documents are available from https://assist.dla.mil/.)

SAE-AS8879, Screw Threads - UNJ Profile, Inch Controlled Radius Root with Increased Minor Diameter (DoD adopted)

(Copies of this document are available from http://www.sae.org/.)

For design feature purposes, this specification sheet takes precedence over procurement documents referenced herein. Referenced documents shall be of the issue in effect on date of invitations for bid.

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

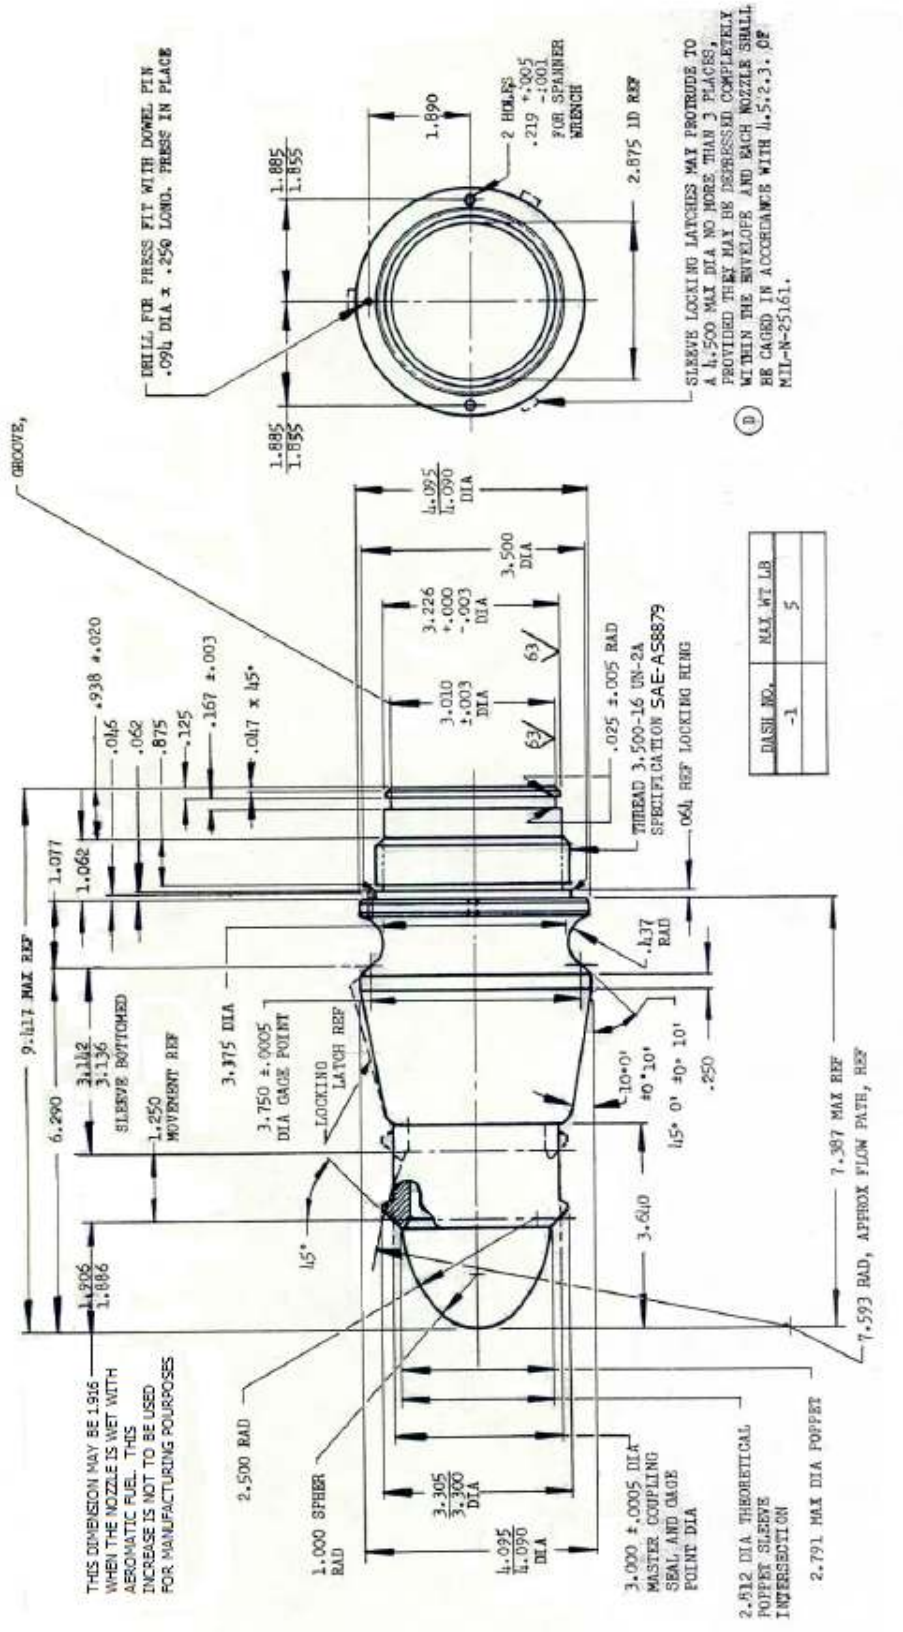


FIGURE 1. Nozzle - Type MA-2, Flight Pressure Refueling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Air Force - 71

Preparing activity
Air Force - 71

(Project 1680-2016-002)

Reviewer activities:
Air Force - 99
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.