USER SYMBOLS:
COAST GUARD – CG
USAF - 11

REVIEWER SYMBOLS:
ARMY – AV, EL
NAVY – AS
USAF – 80

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

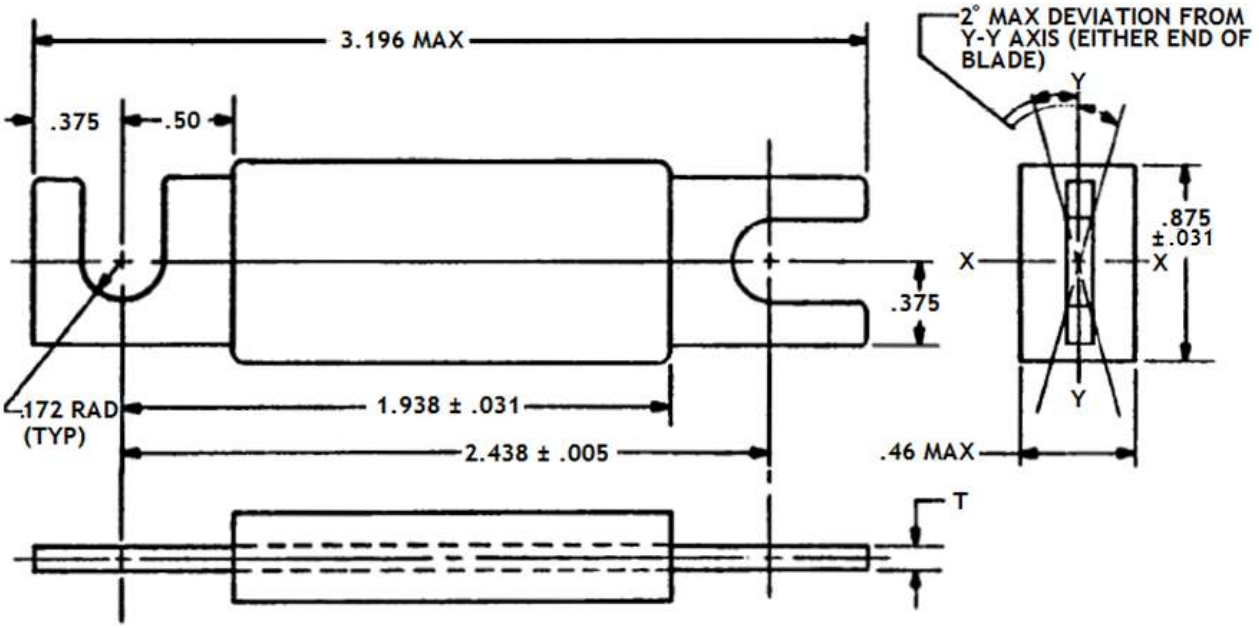


TABLE I

DASH NO.	AMPERE RATING	WEIGHT LB MAX	TEST LEAD SIZE (AWG)	T MAX
-35	35	.0290	12	.026
-50	50	.0310	10	
-90	90	.0314	6	
-100	100	.0320	4	
-130	130	.0325	2	
-150	150	.033	2	.046
-175	175	.035	1	
-200	200	.037	1	
-225	225	.039	3/0	
-275	275	.041	3/0	
-325	325	.048	4/0	.095
-350	350	.050	4/0	
-400	400	.0525	4/0	
-500	500	.056	2-2/0	

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 6 FEB 64 REVISED (A) 7 MAY 65 (B) 27 MAR 69 (C) 28 SEP 73


P.A. NAVY – AS Other Cust. USAF – 80 ARMY – AV	INTER-NATIONAL INTEREST	TITLE: FUSE, SELF INDICATING CURRENT LIMITER, AIRCRAFT	MILITARY STANDARD MS28936
PROCUREMENT SPECIFICATION NONE		SUPERSEDES	SHEET 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
COAST GUARD – CG
USAF - 11

REVIEWER SYMBOLS:
ARMY – AV, EL
NAVY – AS
USAF – 80

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

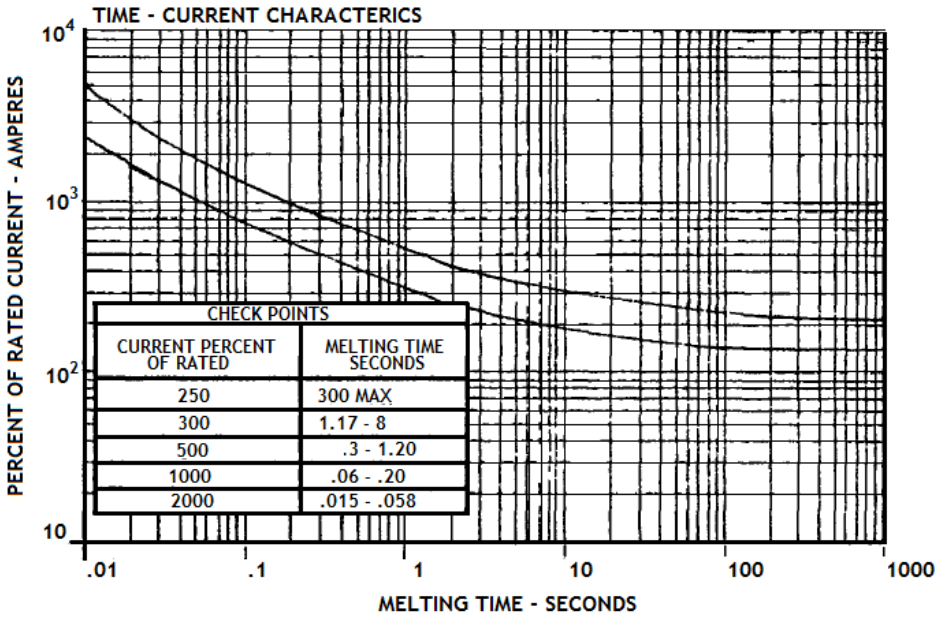

DETAIL RUPTURE CURRENT PERFORMANCE

SYSTEM VOLTAGE	VOLTAGE BEFORE FAULT	CALIBRATED FAULT CURRENT (AMPERES)	TRANSIENT VOLTAGE AFTER CALIBRATED FAULT CURRENT INTERRUPTION	OPEN CIRCUIT VOLTAGE	ARCING TIME MILLISECONDS
28 VOLT DC	28 ± 2	6000 AMPERES IN .01 SECOND AFTER FAULT INITIATION	28 WITHIN 2.5 MILLISECONDS 70 MAX	28 ± 2	2.5

REQUIREMENTS:

1. MATERIAL: CASE – LAMINATED GLASS MELAMINE GMG PER MIL-P-15037 OR INORGANIC ASBESTOS CEMENT COMPOUND.
   WINDOW – TRANSPARENT MICA OR GLASS
   FUSE BLADE – COPPER, SILVER PLATED
2. CONTOUR OF VIEWING WINDOW OPTIONAL. FUSIBLE ELEMENT VISIBLE.
3. TEST LEADS SHALL BE OF THE AWG SIZE DESCRIBED IN TABLE I.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL ± .005
5. THIS FUSE IS FOR USE IN MS28934 HOLDERS.
6. QUALITY CONFORMANCE TESTS
   A. INDIVIDUAL TESTS – EACH LIMITER SHALL BE INSPECTED TO VERIFY THAT THE MATERIALS, DESIGN, CONSTRUCTION, WEIGHT, PHYSICAL DIMENSIONS, MARKING, WORKMANSHIP AND CONTINUITY CONFORM WITH THE REQUIREMENTS OF THIS STANDARD.
   B. SAMPLING TESTS
      1. SAMPLING SHALL BE LEVEL S-4 AQL 6.5 PER CENT DEFECTIVE IN ACCORDANCE WITH MIL-STD-105 TESTS SHALL BE CONDUCTED WITH THE LIMITER MOUNTED IN MS28934 HOLDERS, WHEN APPLICABLE.
      2. LIMITERS SHALL CARRY 100% OF THEIR RATED CURRENT FOR ONE HOUR.
      3. LIMITERS SHALL OPEN THE CURRENT AT 250% OF THEIR RATED CURRENT WITHIN 300 SECONDS.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
COAST GUARD – CG
USAF - 11

REVIEWER SYMBOLS:
ARMY – AV, EL
NAVY – AS
USAF – 80

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REQUIREMENTS (Continued)

C. PERIODIC TEST

1. PERIODIC TESTS SHALL BE CONDUCTED EVERY 3 YEARS OR ON THE FIRST PRODUCTION ORDER FOR THE SPECIFIC CURRENT RATING AFTER THE 3 YEAR PERIOD HAS EXPIRED, TESTING SHALL BE DONE ON THREE LIMITERS FOR EACH TEST, FOR EACH LIMITER RATING AS APPLICABLE (SEE TABLE II)

TABLE II

PER CENT CURRENT	MELTING TIME SECONDS
300	1.17 - 8
500	0.3 – 1.2
1000	0.06 – 0.20
2000 1/	0.015 – 0.058
6000 AMP (RUPTURE CURRENT)	INSTANTANEOUS

1/ TEST CURRENT SHOULD NOT BE EXCESS OF 6000 AMPERES (RUPTURE CURRENT).

*CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ASCC AIR STD 12/17 AND STANAG 3459). WHEN REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.