
FED. SUP CLASS 5120

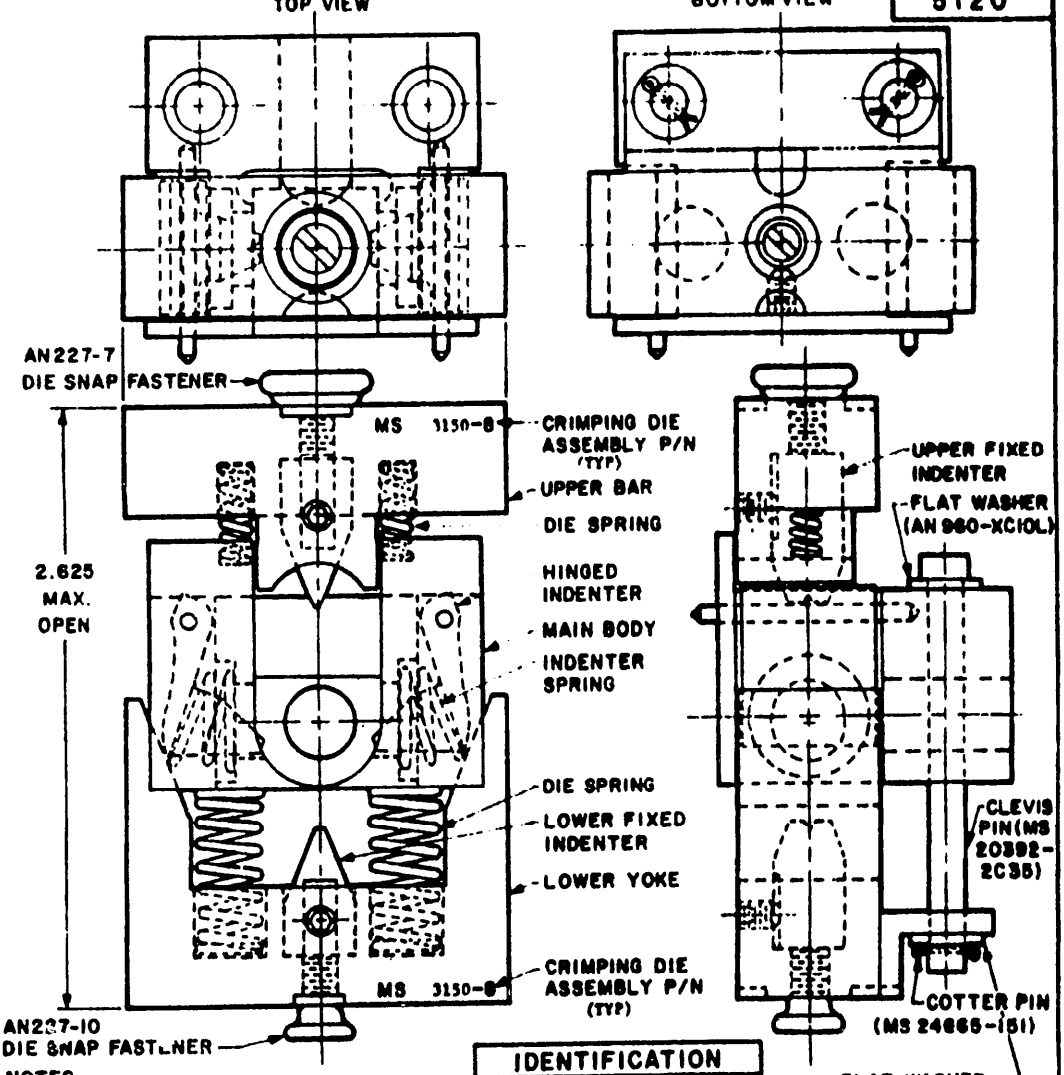

NOTES:
1. DIE SPRINGS, (2), IN LOWER YOKE: O.D. 3/8 IN., LG. 7/8 IN., COMP. 7 LBS.
2. DIE SPRINGS, (2), IN UPPER BAR: O.D. 5/32 IN., LG. 1/2 IN., COMP. 1.5 LBS.
3. BASIC CRIMPING DIE CONSISTS OF ASSEMBLY WITHOUT INDENTERS.
4. IDENTIFICATION ENGRAVING SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
5. CRIMPED CONTACT BARRELS SHALL NOT EXCEED THEIR SPECIFIED MAXIMUM DIAMETERS BY 0.015 INCH.
6. DRAWING NOT TO SCALE.

IDENTIFICATION	
BASIC DIE	MAIN BODY
BD 1	M 1
BD 2	M 2
BD 3	M 3

CRIMPING DIE ASSEMBLY P/N	ASSEMBLY CONSISTS OF			
	BASIC DIE	HINGED INDENTER (2 REQ.)	FIXED INDENTERS (1 EACH REQ.)	
			UPPER	LOWER
MS 3150-8	BD 1	H 1	U 1	L 1
MS 3150-4	BD 2	H 2	U 2	L 2
MS 3150-0	BD 3	H 3	U 3	L 3

APPROVED 1 Apr 10 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard when needed.

P.A. NAVY - AS
Other Cust

PROCUREMENT SPECIFICATION MIL-C-22909

SUPERSEDES

TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)


MILITARY STANDARD
MS 3150(NAVY)
SHEET 1 OF 6

DD FORM SEP 67 672-1 (Electronic coordination)

Project No. 5120-N736

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5120

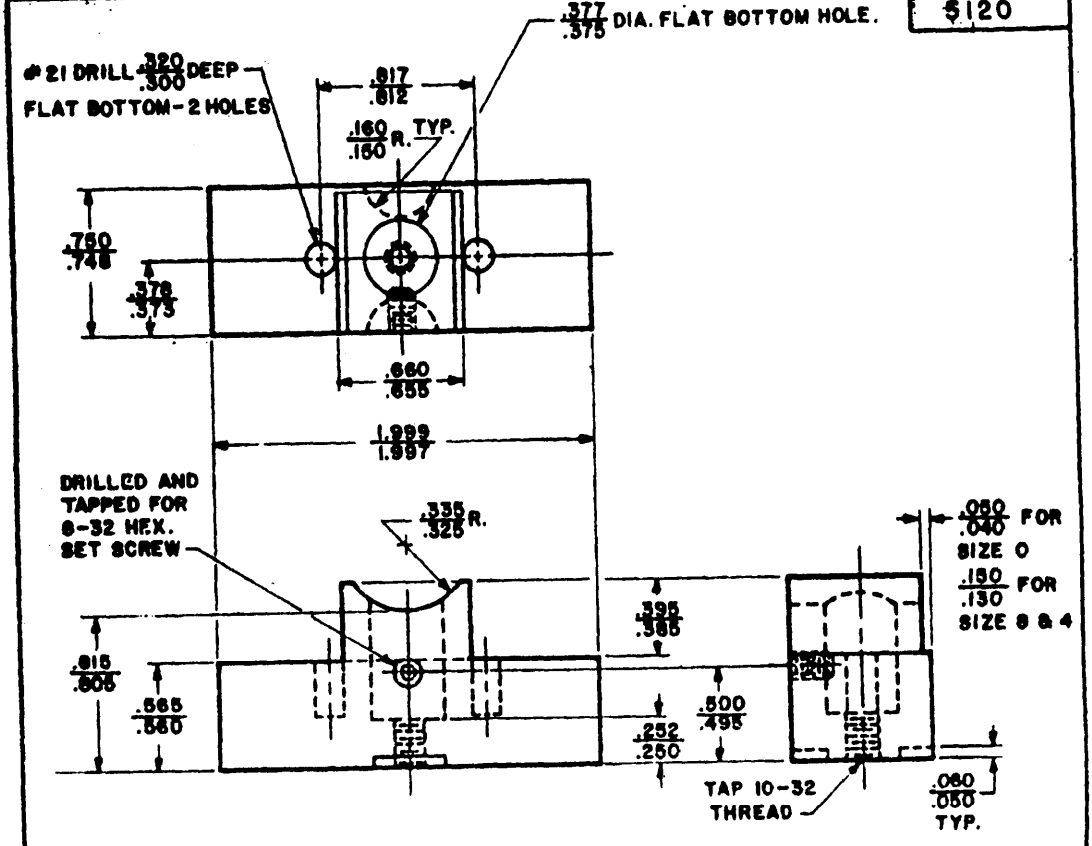

UPPER BAR

NOTES:
1. MATERIALS; OIL HARDENED TOOL STEEL, HARDENED TO ROCKWELL "C" 48-52.
2. FINISH; BLACK OXIDE 63 MICROINCHES (√63).
3. UNLESS OTHERWISE SPECIFIED: TOLERANCES; DECIMALS ±.002, ANGLES ±1°.
4. IDENTIFICATION ENGRAVINGS SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
5. DRAWING NOT TO SCALE.


APPROVED 1 Apr 1971 REVISED

P.A. NAVY - AS Other Cust	TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)	MILITARY STANDARD MS 3150(NAVY)
PROCUREMENT SPECIFICATION MIL-C-22909	SUPERSEDES	SHEET 2 OF 6

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5120

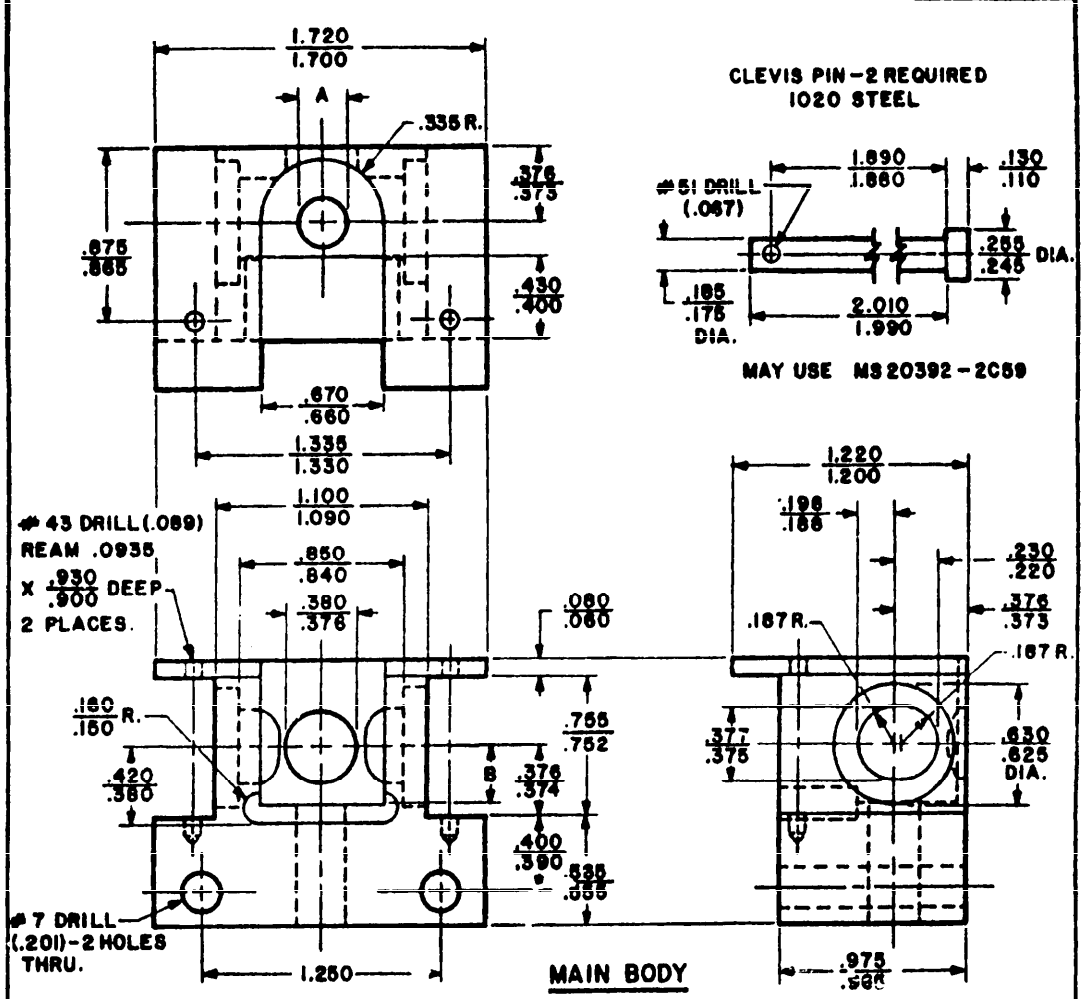

NOTES;
1. MATERIALS; OIL HARDENED TOOL STEEL, HARDENED TO ROCKWELL "C" 48-52.
2. FINISH; BLACK OXIDE 65 MICROINCHES (63).
3. UNLESS OTHERWISE SPECIFIED: TOLERANCES; DECIMALS ±.002, ANGLES ±1°.
4. IDENTIFICATION ENGRAVINGS SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
5. DRAWING NOT TO SCALE.

MAIN BODY IDENTIFICATION	CONTACT SIZE	A DIA.	B
M 1	8	.260 / .256	.252 / .248
M 2	4	.344 / .339	.252 / .248
M 3	0	.536 / .531	.352 / .348

APPROVED 1 Apr 71 REVISED


This standard has been approved by the Department of the NAVY and is mandatory for use by all activities. All other military services are required to comply with this standard when suitable.

P.A. NAVY - AS Other Cust	TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)	MILITARY STANDARD MS 3150(NAVY)
PROCUREMENT SPECIFICATION MIL-C-22909	SUPERSEDES	SHEET 3 OF 6

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5120

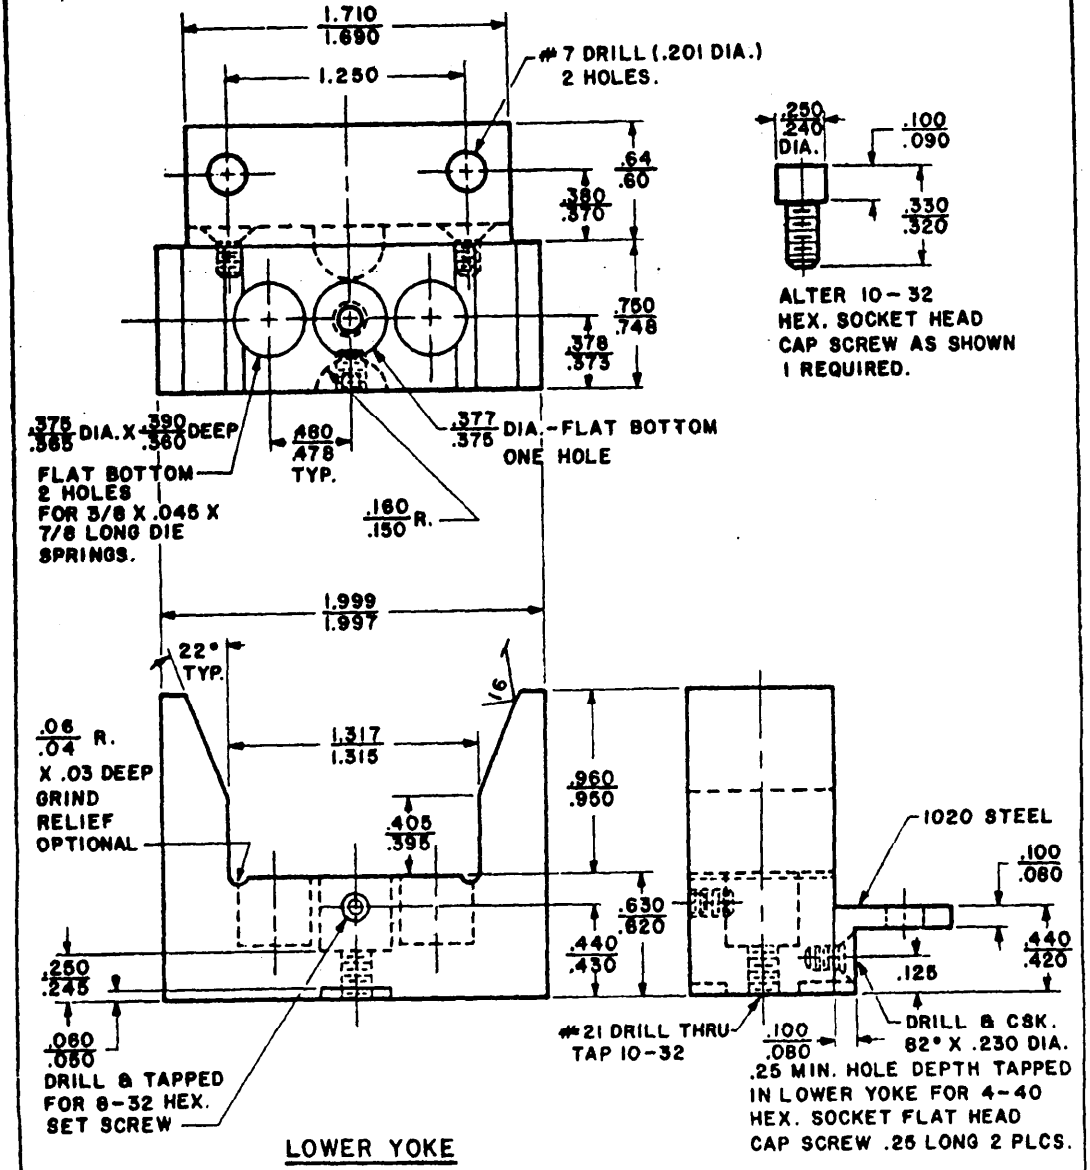

LOWER YOKE

NOTES:
1. MATERIALS; OIL HARDENED TOOL STEEL, HARDENED TO ROCKWELL "C" 58-62.
2. FINISH; BLACK OXIDE 63 MICROINCHES (63), EXCEPT THE RAMPS WHICH SHALL NOT HAVE BLACK OXIDE FINISH BUT SHALL BE POLISHED AND BUFFED TO 16 MICROINCHES (16).
3. UNLESS OTHERWISE SPECIFIED: TOLERANCES; DECIMALS ±.002, ANGLES ±1°.
4. IDENTIFICATION ENGRAVINGS SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
5. DRAWING NOT TO SCALE.

APPROVED 1 Apr 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


P.A. NAVY - AS Other Cost	TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)	MILITARY STANDARD MS 3150(NAVY)
PROCUREMENT SPECIFICATION MIL-C-22909	SUPERSEDES	SHEET 4 OF 6

DD FORM SEP 67 672-1 (Limited coordination)

*PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5120

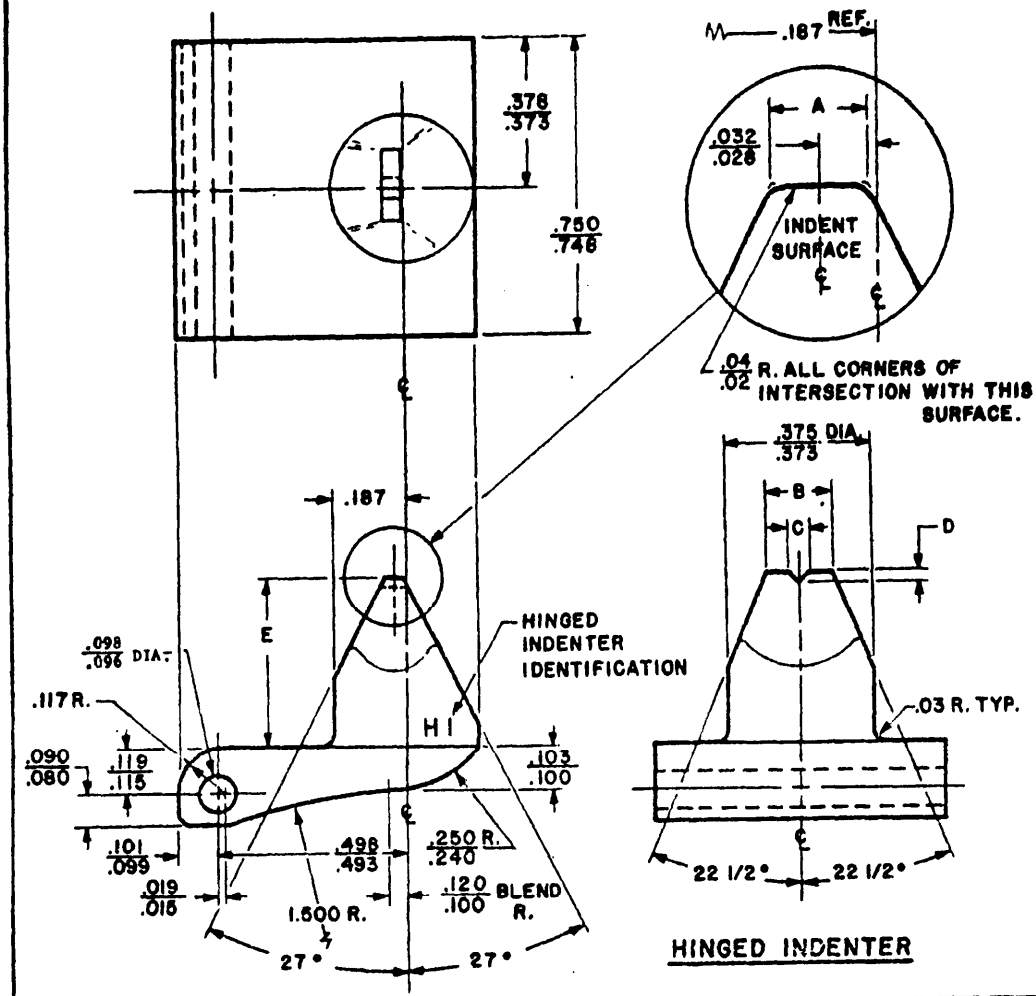

HINGED INDENTER

HINGED INDENTER IDENTIFICATION	CONTACT SIZE	INDENTER DIMENSIONS				
		A ±.002	B ±.002	C ±.005	D ±.005	E ±.0005
H1	8	.050	.170	.050	.050	.491
H2	4	.065	.187	.060	.060	.458
H3	0	.095	.200	.070	.070	.391

NOTES:
1. MATERIALS; OIL HARDENED TOOL STEEL, HARDENED TO ROCKWELL "C" 52-56.
2. FINISH; BLACK OXIDE 63 MICROINCHES (63), EXCEPT THE CRIMPING AREA WHICH SHALL BE POLISHED AND BUFFED, THEN CHROME PLATED AND BUFFED TO 4 MICROINCHES (4).
3. ALL INDENTER RADII MUST BLEND.
4. BREAK ALL SHARP EDGES.
5. UNLESS OTHERWISE SPECIFIED; TOLERANCES; DECIMALS ±.002, ANGLES ±1°.
6. IDENTIFICATION ENGRAVINGS SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
7. DRAWING NOT TO SCALE.

APPROVED 1 Apr 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard when suitable.


P.A. NAVY - AS Other Cust	TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)	MILITARY STANDARD MS 3150(NAVY)
PROCUREMENT SPECIFICATION MIL-C-22909	SUPERSEDES.	SHEET 5 OF 6

DD FORM 1 SEP 67 672-1 (Limited coordination)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5120

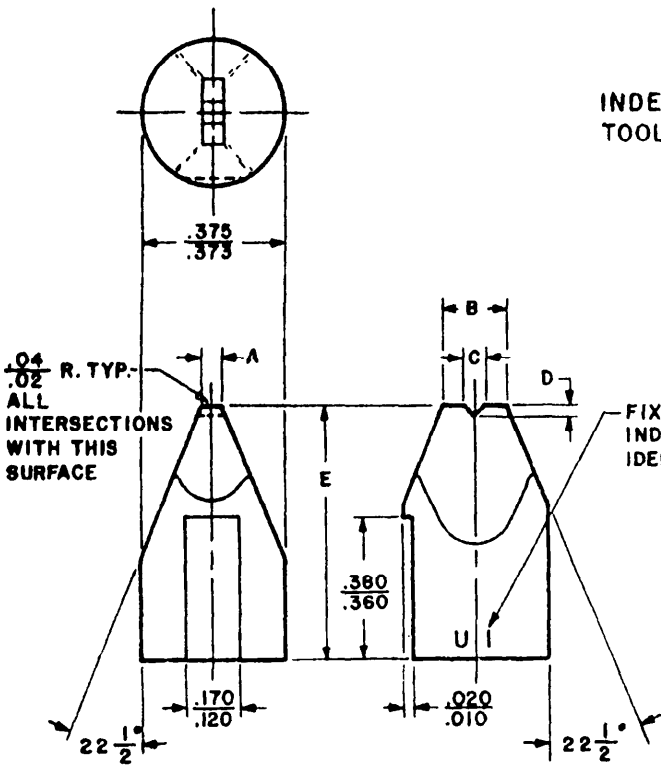

INDENTER LOCATIONS WITH
TOOL IN FULLY CLOSED POSITION

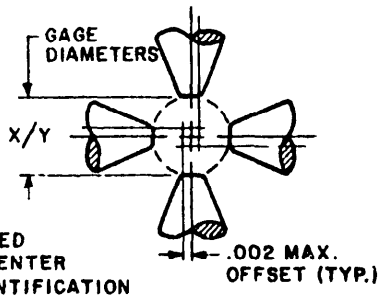

GAGING LIMITS

DIE FOR CONTACT SIZE	X +.0000 −.0002 GO DIA.	Y +.0000 −.0002 NO GO DIA.
8	.130	.136
4	.195	.202
0	.325	.332

FIXED INDENTERS

FIXED INDENTER IDENTIFICATION		CONTACT SIZE	INDENTER DIMENSIONS					
			A ±.002	B ±.002	C ±.005	D ±.005	E ±.0005	E ±.0005
UPPER	LOWER						UPPER	LOWER
U1	L1	8	.050	.170	.050	.050	.823	.683
U2	L2	4	.065	.187	.060	.060	.790	.650
U3	L3	0	.095	.200	.070	.070	.725	.585

NOTES:
1. MATERIALS; OIL HARDENED TOOL STEEL, HARDENED TO ROCKWELL "C" 58-62.
2. FINISH; BLACK OXIDE 63 MICROINCHES (63), EXCEPT THE CRIMPING AREA WHICH SHALL BE POLISHED AND BUFFED, THEN CHROME PLATED AND BUFFED 4 MICROINCHES (4).
3. ALL INDENTER RADII MUST BLEND.
4. BREAK ALL SHARP EDGES.
5. UNLESS OTHERWISE SPECIFIED: TOLERANCES; DECIMALS ±.002, ANGLES ±1°.
6. IDENTIFICATION ENGRAVINGS SHALL BE CUT TO A DEPTH OF .020/.015, MIN. HEIGHT .094.
7. DRAWING NOT TO SCALE.

APPROVED 1 Apr 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard when possible.

P.A. NAVY - AS Other Cust	TITLE DIES FOR CRIMPING MS3190 TYPE B CONTACT WIRE BARRELS (INSTALL DIES IN MS25441-1 HEAD)	MILITARY STANDARD MS 3150(NAVY)
PROCUREMENT SPECIFICATION MIL-C-22909	SUPERSEDES	SHEET 6 OF 6

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:00Z
Check the source to verify that this is the current version before use.