

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-K-27545

Form Approved
OMB No. 0704-0188

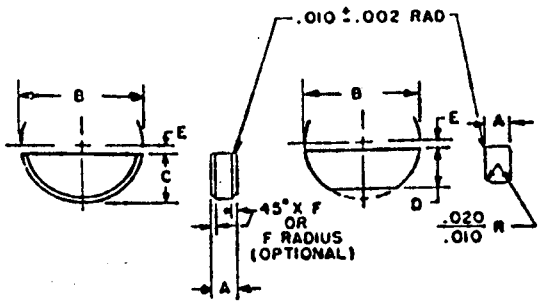

TYPE I

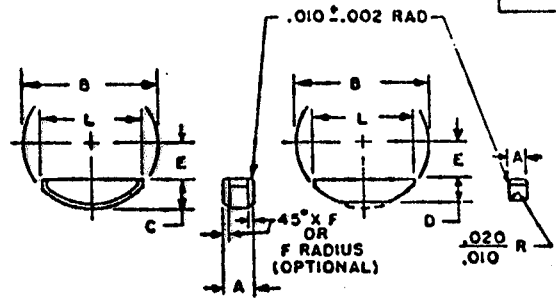

TYPE II

TABLE I. TYPE I DASH NUMBERS AND DIMENSIONS

DASH NO	KEY SIZE NOMINAL	SAE NO	KEY DIMENSIONS					F		KEY AREA AT SHEAR LINE
			WIDTH A +.001 -.000	DIAMETER B +.000 -.010	HEIGHT C +.000 -.005	HEIGHT D +.000 -.006	HEIGHT E NOMINAL	DIM	TOL	
1	1/16 x 1/4	201	.0625	.250	.109	-	1/64			.0145
31	1/16 x 5/16	206	.0625	.312	.140	-	1/64			.0184
32	1/16 x 3/8	211	.0625	.375	.172	-	1/64	.010		.0225
4	1/16 x 1/2	1	.0625	.500	.203	.194	1/64			.0296
2	3/32 x 5/16	207	.0938	.312	.140	-	1/64			.0264
33	3/32 x 3/8	212	.0938	.375	.172	-	1/64			.0328
5	3/32 x 1/2	2	.0938	.500	.203	.194	3/64	.020		.0434
7	3/32 x 5/8	4	.0938	.625	.250	.240	1/16			.0523
3	1/8 x 3/8	213	.1250	.375	.172	-	1/64			.0420
6	1/8 x 1/2	3	.1250	.500	.203	.194	3/64			.0512
8	1/8 x 5/8	5	.1250	.625	.250	.240	1/16	.030	+.010 -.000	.0716
10	1/8 x 3/4	7	.1250	.750	.313	.303	1/16			.0884
9	5/32 x 3/8	6	.1563	.625	.250	.240	1/16			.0871
11	5/32 x 1/2	8	.1563	.750	.313	.303	1/16			.1086
13	5/32 x 7/8	10	.1563	.875	.375	.365	1/16			.1294
34	3/16 x 5/8	61	.1875	.625	.250	.240	1/16			.0105
12	3/16 x 3/4	9	.1875	.750	.313	.303	1/16			.1279
14	3/16 x 7/8	11	.1875	.875	.375	.365	1/16			.1531
16	3/16 x 1	13	.1875	1.000	.438	.428	1/16			.1781
19	3/16 x 1-1/8	16	.1875	1.125	.484	.475	5/64	.040		.2007
39	3/16 x 1-1/4	19	.1875	1.250	.547	.537	5/64			.2284
36	7/32 x 7/8	12	.2188	.875	.375	.365	1/16			.1813
37	7/32 x 1	14	.2188	1.000	.438	.428	1/16			.2100
38	7/32 x 1-1/8	17	.2188	1.125	.484	.475	5/64			.2320
40	7/32 x 1-1/4	20	.2188	1.250	.547	.537	5/64			.2608
35	1/4 x 3/4	91	.2500	.750	.313	.303	1/16			.1623
15	1/4 x 7/8	A	.2500	.875	.375	.365	1/16			.1976
17	1/4 x 1	15	.2500	1.000	.438	.428	1/16			.2320
20	1/4 x 1-1/8	18	.2500	1.125	.484	.475	5/64			.2622
22	1/4 x 1-1/4	21	.2500	1.250	.547	.537	5/64			.2955
25	1/4 x 1-3/8	22	.2500	1.375	.594	.584	3/32			.3259
28	1/4 x 1-1/2	24	.2500	1.500	.641	.631	7/64	.050	+.015 -.000	.3562
18	5/16 x 1	B	.3125	1.000	.438	.428	1/16			.2811
21	5/16 x 1-1/8	C	.3125	1.125	.484	.475	5/64			.3193
23	5/16 x 1-1/4	D	.3125	1.250	.547	.537	5/64			.3621
26	5/16 x 1-3/8	23	.3125	1.375	.594	.584	3/32			.4003
29	5/16 x 1-1/2	25	.3125	1.500	.641	.631	7/64			.4384
24	3/8 x 1-1/4	E	.3750	1.250	.547	.537	5/64			.4243
27	3/8 x 1-3/8	F	.3750	1.375	.594	.584	3/32	.060		.4705
30	3/8 x 1-1/2	G	.3750	1.500	.641	.631	7/64			.5166

(E) DENOTES CHANGES (SEE PAGES 2 AND 6)

INCH - POUND

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY-AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,IS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET

TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90

SUPERSEDING
MS35756D 1 JUN 88

AMSC- N/A FSC - 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672 MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

GPO 1989-606-945

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

TABLE II. TYPE II DASH NUMBERS AND DIMENSIONS

DASH NO	KEY SIZE NOMINAL	SAE NO	KEY DIMENSIONS					KEY AREA AT SHEAR LINE	LENGTH L +.000 -.010
			WIDTH A +.001 -.000	DIAMETER B +.000 -.010	HEIGHT C +.000 -.005	HEIGHT D +.000 -.006	HEIGHT E NOMINAL		
109	3/16 x 2-1/8	126	.1875	2.125	.406	.396	21/32	.2578	1.380
111	3/16 x 2-1/8	26	.1875	2.125	.531	.521	17/32	.3222	1.723
101	1/4 x 2-1/8	127	.2500	2.125	.406	.396	21/32	.3437	1.380
112	1/4 x 2-1/8	27	.2500	2.125	.531	.521	17/32	.4178	1.723
103	14 x 2-3/4	RX	.2500	2.750	.594	.584	25/32	.5000	2.000
117	1/4 x 2-3/4	R	.2500	2.750	.750	.740	5/8	.5718	2.317
110	5/16 x 2-1/8	128	.3125	2.125	.406	.396	21/32	.4296	1.380
113	5/16 x 2-1/8	28	.3125	2.125	.531	.521	17/32	.5062	1.723
115	5/16 x 2-3/4	SX	.3125	2.750	.594	.584	25/32	.6286	2.000
118	5/16 x 2-3/4	S	.3125	2.750	.750	.740	5/8	.7071	2.317
102	3/8 x 2-1/8	129	.3750	2.125	.406	.396	21/32	.4833	1.380
114	3/8 x 2-1/8	29	.3750	2.125	.531	.521	17/32	.5868	1.723
104	3/8 x 2-3/4	TX	.3750	2.750	.594	.584	25/32	.6943	2.000
119	3/8 x 2-3/4	T	.3750	2.750	.750	.740	5/8	.8319	2.317
122	3/8 x 3-1/2	30	.3750	3.500	.938	.927	13/16	1.0781	2.880
116	7/16 x 2-3/4	UX	.4375	2.750	.594	.584	25/32	.8253	2.000
120	7/16 x 2-3/4	U	.4375	2.750	.750	.740	5/8	.9499	2.317
123	7/16 x 3-1/2	31	.4375	3.500	.938	.927	13/16	1.2371	2.880
105	1/2 x 2-3/4	VX	.5000	2.750	.594	.584	25/32	.9094	2.000
121	1/2 x 2-3/4	V	.5000	2.750	.750	.740	5/8	1.0606	2.317
106	1/2 x 3-1/2	32	.5000	3.500	.938	.927	13/16	1.3905	2.880
124	9/16 x 3-1/2	33	.5625	3.500	.938	.927	13/16	1.5368	2.880
107	5/8 x 3-1/2	34	.6250	3.500	.938	.927	13/16	1.6755	2.880
125	11/16 x 3-1/2	35	.6875	3.500	.938	.927	13/16	1.8062	2.880
108	3/4 x 3-1/2	36	.7500	3.500	.938	.927	13/16	1.9281	2.880

REQUIREMENTS:

(E) 1. MATERIAL. ALLOY STEEL IN ACCORDANCE WITH ASTM A322, GRADE 4130 (UNS G41300) OR GRADE 8630 (UNS G86300).

2. PROTECTIVE COATING. ALLOY STEEL KEYS SHALL BE UNCOATED.

3. HARDNESS. ALLOY STEEL KEYS SHALL HAVE A HARDNESS OF 38 TO 45 HRC.

4. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC SPECIFICATION SHEET NUMBER, FOLLOWED BY A DASH NUMBER FROM EITHER TABLE I OR II.

EXAMPLE: MS35756-7

- 7 — DASH NUMBER
- MS35756 — BASIC SPECIFICATION SHEET NUMBER

MS35756-7 - KEY, WOODRUFF, TYPE I, .0938 WIDE; .625 DIA., ALLOY STEEL

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. KEYS MUST BE FREE FROM BURRS, CRACKS, AND ALL OTHER DEFECTS THAT WOULD AFFECT THEIR SERVICEABILITY.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY-AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,IS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET
TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90
SUPERSEDING
MS35756D 1 JUN 88
AMSC- N/A FSC - 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.


DD Form 672 MAY 88 previous editions are obsolete GPO 1989-606-945

Source: https://assist.dla.mil Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-K-27545

Form Approved
OMB No. 0704-0188

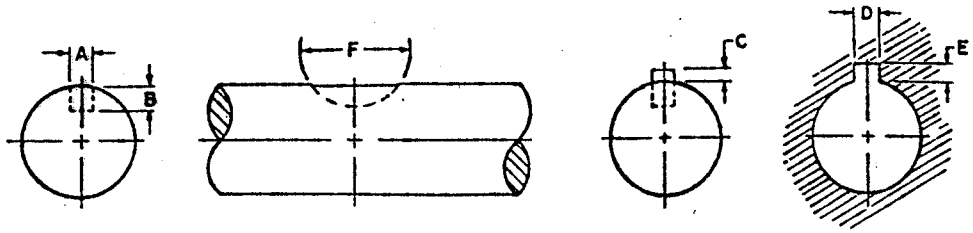

KEY SLOT KEY ABOVE SHAFT KEYWAY

GENERAL SPECIFICATION

(1) KEY SLOT WIDTH-A: DIMENSIONS SHOWN ARE SET WITH THE MAXIMUM KEY SLOT WIDTH AS THAT FIGURE WHICH WILL RECEIVE A KEY WITH THE GREATEST AMOUNT OF LOOSENESS PERMISSIBLE TO ASSURE THE KEY STICKING IN THE SLOT. MINIMUM KEY SLOT WIDTH IS THAT FIGURE PERMITTING THE LARGEST SHAFT DISTORTION ACCEPTABLE WHEN ASSEMBLING MAXIMUM KEY IN MINIMUM KEY SLOT.

(2) B, C & E: DIMENSIONS ARE TAKEN AT SIDE INTERSECTION.

(3) KEY SLOT DEPTH-B: DIMENSIONS SHOWN ARE SET WITH THE MAXIMUM AS THAT FIGURE WHICH RECEIVES A KEY OF MAXIMUM HEIGHT AND PERMITS THE KEY TO PROJECT ABOVE THE SHAFT A DISTANCE EQUAL TO ONE HALF THE BASIC WIDTH.

(4) KEY HEIGHT ABOVE SHAFT-C: DIMENSIONS SHOWN ARE SET WITH ONE HALF THE BASIC KEY WIDTH AS BASIC HEIGHT. TOLERANCE ON KEY HEIGHT ABOVE SHAFT ±.005.

(5) KEYWAY WIDTH-D: DIMENSIONS SHOWN ARE DETERMINED BY USING FOR WIDTH OF KEYWAY, THE MAXIMUM WIDTH OF KEY MINUS .000, PLUS .002.

(6) KEYWAY DEPTH-E: DIMENSIONS SHOWN ARE DETERMINED BY USING FOR MINIMUM DEPTH OF KEYWAY, THE MAXIMUM KEY IN THE MINIMUM KEY SLOT PLUS .001. MAXIMUM KEYWAY DEPTH IS MINIMUM PLUS .005.

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY- AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,JS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET

TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90

SUPERSEDING
MS35756D 1 JUN 88

AMSC- N/A FSC - 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-K-27545

Form Approved
OMB No. 0704-0188

TABLE III. TYPE I KEY SLOT AND KEYWAY DIMENSIONS

NOMINAL SIZE	SAE NO	KEY SLOT					KEY ABOVE SHAFT HEIGHT C ±.005	KEYWAY	
		WIDTH A		DEPTH B +.005 -.000	DIAMETER F			WIDTH D +.002 -.000	DEPTH E +.005 -.000
		MIN	MAX		MIN	MAX			
1/16 x 1/4	201	.0615	.0630	.0728	.250	.268	.0312	.0635	.0372
1/16 x 5/16	206	.0615	.0630	.1038	.312	.330	.0312	.0635	.0372
1/16 x 3/8	211	.0615	.0630	.1358	.375	.393	.0312	.0635	.0372
1/16 x 1/2	1	.0615	.0630	.1668	.500	.518	.0312	.0635	.0372
3/32 x 5/16	207	.0928	.0943	.0882	.312	.330	.0469	.0948	.0529
3/32 x 3/8	212	.0928	.0943	.1202	.375	.393	.0469	.0948	.0529
3/32 x 1/2	2	.0928	.0943	.1511	.500	.518	.0469	.0948	.0529
3/32 x 5/8	4	.0928	.0943	.1981	.625	.643	.0469	.0948	.0529
1/8 x 3/8	213	.1240	.1255	.1645	.375	.393	.0625	.1260	.0685
1/8 x 1/2	3	.1240	.1255	.1355	.500	.518	.0625	.1260	.0685
1/8 x 5/8	5	.1240	.1255	.1825	.625	.643	.0625	.1260	.0685
1/8 x 3/4	7	.1240	.1255	.2455	.750	.768	.0625	.1260	.0685
5/32 x 5/8	6	.1553	.1568	.1669	.625	.643	.0781	.1573	.0841
5/32 x 3/4	8	.1553	.1568	.2299	.750	.768	.0781	.1573	.0841
5/32 x 7/8	10	.1553	.1568	.2919	.875	.895	.0781	.1573	.0841
3/16 x 5/8	61	.1863	.1880	.1513	.625	.643	.0937	.1885	.0997
3/16 x 3/4	9	.1863	.1880	.2143	.750	.768	.0937	.1885	.0997
3/16 x 7/8	11	.1863	.1880	.2763	.875	.895	.0937	.1885	.0997
3/16 x 1	13	.1863	.1880	.3393	1.000	1.020	.0937	.1885	.0997
3/16 x 1-1/8	16	.1863	.1880	.3853	1.125	1.145	.0937	.1885	.0997
3/16 x 1-1/4	19	.1863	.1880	.4483	1.250	1.273	.0937	.1885	.0997
7/32 x 7/8	12	.2175	.2193	.2607	.875	.895	.1093	.2198	.1153
7/32 x 1	14	.2175	.2193	.3237	1.000	1.020	.1093	.2198	.1153
7/32 x 1-1/8	17	.2175	.2193	.3697	1.125	1.145	.1093	.2198	.1153
7/32 x 1-1/4	20	.2175	.2193	.4327	1.250	1.273	.1093	.2198	.1153
1/4 x 3/4	91	.2487	.2505	.1830	.750	.768	.1250	.2510	.1310
1/4 x 7/8	A	.2487	.2505	.2450	.875	.895	.1250	.2510	.1310
1/4 x 1	15	.2487	.2505	.3080	1.000	1.020	.1250	.2510	.1310
1/4 x 1-1/8	18	.2487	.2505	.3540	1.125	1.145	.1250	.2510	.1310
1/4 x 1-1/4	21	.2487	.2505	.4170	1.250	1.273	.1250	.2510	.1310
1/4 x 1-3/8	22	.2487	.2505	.4640	1.375	1.398	.1250	.2510	.1310
1/4 x 1-1/2	24	.2487	.2505	.5110	1.500	1.523	.1250	.2510	.1310
5/16 x 1	B	.3111	.3130	.2768	1.000	1.020	.1562	.3135	.1622
5/16 x 1-1/8	C	.3111	.3130	.3228	1.125	1.145	.1562	.3135	.1622
5/16 x 1-1/4	D	.3111	.3130	.3858	1.250	1.273	.1562	.3135	.1622
5/16 x 1-3/8	23	.3111	.3130	.4328	1.375	1.398	.1562	.3135	.1622
5/16 x 1-1/2	25	.3111	.3130	.4798	1.500	1.523	.1562	.3135	.1622
3/8 x 1-1/4	E	.3735	.3755	.3545	1.250	1.273	.1875	.3760	.1935
3/8 x 1-3/8	F	.3735	.3755	.4015	1.375	1.398	.1875	.3760	.1935
3/8 x 1-1/2	G	.3735	.3755	.4485	1.500	1.523	.1875	.3760	.1935

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY-AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,IS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET

TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90

SUPERSEDING
MS35756D 1 JUN 88

AMSC- N/A FSC - 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

GPO 1989-606-945

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-K-27545

Form Approved
OMB No. 0704-0188

TABLE IV. TYPE II KEY SLOT AND KEYWAY DIMENSIONS

NOMINAL SIZE	SAE NO	KEY SLOT					KEY ABOVE SHAFT HEIGHT C ±.005	KEYWAY	
		WIDTH A		DEPTH B +.005 -.000	DIAMETER F			WIDTH D +.002 -.000	DEPTH E +.005 -.000
		MIN	MAX		MIN	MAX			
3/16 x 2-1/8	126	.1863	.1880	.3073	2.125	2.160	.0937	.1855	.0997
3/16 x 2-1/8	26	.1863	.1880	.4323	2.125	2.160	.0937	.1885	.0997
1/4 x 2-1/8	127	.2487	.2505	.2760	2.125	2.160	.1250	.2510	.1310
1/4 x 2-1/8	27	.2487	.2505	.4010	2.125	2.160	.1250	.2510	.1310
1/4 x 2-3/4	RX	.2487	.2505	.4640	2.750	2.785	.1250	.2510	.1310
1/4 x 2-3/4	R	.2487	.2505	.6200	2.750	2.785	.1250	.2510	.1310
5/16 x 2-1/8	128	.3111	.3130	.2448	2.125	2.160	.1562	.3135	.1622
5/16 x 2-1/8	28	.3111	.3130	.3698	2.125	2.160	.1562	.3135	.1622
5/16 x 2-3/4	SX	.3111	.3130	.4328	2.750	2.785	.1562	.3135	.1622
5/16 x 2-3/4	S	.3111	.3130	.5888	2.750	2.785	.1562	.3135	.1622
3/8 x 2-1/8	129	.3735	.3755	.2135	2.125	2.160	.1875	.3760	.1935
3/8 x 2-1/8	29	.3735	.3755	.3385	2.125	2.160	.1875	.3760	.1935
3/8 x 2-3/4	TX	.3735	.3755	.4015	2.750	2.785	.1875	.3760	.1935
3/8 x 2-3/4	T	.3735	.3755	.5575	2.750	2.785	.1875	.3760	.1935
3/8 x 3-1/2	30	.3735	.3755	.7455	3.500	3.535	.1875	.3760	.1935
7/16 x 2-3/4	UX	.4360	.4380	.3703	2.750	2.785	.2187	.4385	.2247
7/16 x 2-3/4	U	.4360	.4380	.5263	2.750	2.785	.2187	.4385	.2247
7/16 x 3-1/2	31	.4360	.4380	.7143	3.500	3.535	.2187	.4385	.2247
1/2 x 2-3/4	VX	.4985	.5005	.3390	2.750	2.785	.2500	.5010	.2560
1/2 x 2-3/4	V	.4985	.5005	.4950	2.750	2.785	.2500	.5010	.2560
1/2 x 3-1/2	32	.4985	.5005	.6830	3.500	3.535	.2500	.5010	.2560
9/16 x 3-1/2	33	.5610	.5630	.6518	3.500	3.535	.2812	.5635	.2872
5/8 x 3-1/2	34	.6235	.6255	.6205	3.500	3.535	.3125	.6260	.3185
11/16 x 3-1/2	35	.6860	.6880	.5893	3.500	3.535	.3437	.6885	.3497
3/4 x 3-1/2	36	.7485	.7505	.5580	3.500	3.535	.3750	.7510	.3810

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY-AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,IS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET

TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90

SUPERSEDING
MS35756D 1 JUN 88

AMSC- N/A FSC - 5315


DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

GPO 1989-606-945

DD Form 672 MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

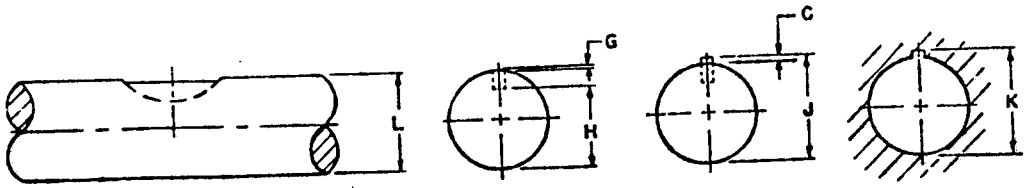

KEY SLOT KEY ABOVE SHAFT KEYWAY

(E) TABLE V. VERSED SINE, DIMENSION "G"

L SHAFT DIA	KEY WIDTH														
	1/16	3/32	1/8	5/32	3/16	7/32	1/4	5/16	3/8	7/16	1/2	9/16	5/8	11/16	3/4
.3125	.0032														
.3437	.0029	.0065													
.3750	.0026	.0060	.0107												
.4060	.0024	.0055	.0099												
.4375	.0022	.0051	.0091												
.4687	.0021	.0047	.0085	.0134											
.5000	.0020	.0044	.0079	.0125											
.5625		.0039	.0070	.0111	.0161										
.6250		.0035	.0063	.0099	.0144	.0198									
.6875		.0032	.0057	.0090	.0130	.0179	.0235								
.7500		.0029	.0052	.0082	.0119	.0163	.0214	.0341							
.8125		.0027	.0048	.0076	.0110	.0150	.0197	.0312							
.8750		.0025	.0045	.0070	.0102	.0139	.0182	.0288							
.9375			.0042	.0066	.0095	.0129	.0170	.0268	.0391						
1.0000			.0039	.0061	.0089	.0121	.0159	.0250	.0365						
1.0625			.0037	.0058	.0083	.0114	.0149	.0235	.0342						
1.1250			.0035	.0055	.0079	.0107	.0141	.0221	.0322	.0443					
1.1875			.0033	.0052	.0074	.0102	.0133	.0209	.0304	.0418					
1.2500			.0031	.0049	.0071	.0097	.0126	.0198	.0288	.0395					
1.3750				.0045	.0064	.0088	.0115	.0180	.0261	.0357	.0471				
1.5000				.0041	.0059	.0080	.0105	.0165	.0238	.0326	.0429				
1.6250				.0038	.0054	.0074	.0097	.0152	.0219	.0300	.0394	.0502			
1.7500					.0050	.0069	.0090	.0141	.0203	.0278	.0365	.0464			
1.8750					.0047	.0064	.0084	.0131	.0189	.0259	.0340	.0432	.0536		
2.0000					.0044	.0060	.0078	.0123	.0177	.0242	.0318	.0404	.0501		
2.1250						.0056	.0074	.0116	.0167	.0228	.0298	.0379	.0470	.0572	.0684
2.2500							.0070	.0109	.0157	.0215	.0281	.0357	.0443	.0538	.0643
2.3750								.0103	.0149	.0203	.0266	.0338	.0419	.0509	.0608
2.5000									.0141	.0193	.0253	.0321	.0397	.0482	.0576
2.6250									.0135	.0184	.0240	.0305	.0377	.0457	.0547
2.7500										.0175	.0229	.0291	.0360	.0437	.0521
2.8750										.0168	.0219	.0278	.0344	.0417	.0498
3.0000											.0210	.0266	.0329	.0399	.0476

NOTES, GENERAL: VALUES FOR DIMENSIONS H, J, AND K FOR VARIOUS SHAFT AND KEY SIZES MAY BE CALCULATED BY USING THE ABOVE TABLE IN CONJUNCTION WITH DIMENSIONAL TABLES ON PAGES 1 AND 4 AS INSTRUCTED BELOW.

SHAFT DIAMETER L: DECIMAL EQUIVALENTS ARE GIVEN TO FOUR PLACES IN TABLE V. ALL FIGURES ARE CALCULATED FROM THIS BASIC DIMENSION. ANY CHANGE IN BASIC SHAFT DIAMETER DIMENSIONS WILL CHANGE ALL OTHER DIMENSIONS. SHOULD ACCURATE DIMENSIONS BE REQUIRED, THE FORMULA FOR G DIMENSION SHOULD BE USED.

DIMENSION G: THE DIMENSIONS SPECIFIED ARE DETERMINED FROM THE FOLLOWING FORMULA:

$$G = \frac{L}{2} - \sqrt{\frac{L^2 - A^2}{4}}$$ WHERE A IS THE MINIMUM WIDTH OF THE KEY.

BOTTOM OF KEY SLOT TO OPPOSITE SIDE OF SHAFT-H: OBTAIN BY SUBTRACTING THE DIMENSION G, AND DEPTH OF KEY SLOT B FROM SHAFT DIAMETER L.

TOP OF KEY TO OPPOSITE SIDE OF SHAFT-J: OBTAIN BY SUBTRACTING THE DIMENSION G FROM THE SHAFT DIAMETER L, AND ADDING TO THIS FIGURE THE HEIGHT OF KEY ABOVE SHAFT C.

BOTTOM OF KEYWAY TO OPPOSITE SIDE OF BORE-K: OBTAIN BY SUBTRACTING THE DIMENSION G FROM THE SHAFT DIAMETER L, AND THEN ADDING TO THIS FIGURE THE DEPTH OF KEYWAY E.

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY - AR NAVY - OS
AIR FORCE - 99 DLA -
REVIEW: AV,AS,IS,MC,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER 5315-0454

MILITARY SPECIFICATION SHEET

TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90

SUPERSEDING
MS35756D 1 JUN 88

AMSC - N/A FSC - 5315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

GPO 1989-606 945

DD Form 672 MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-K-27545

Form Approved
OMB No. 0704-0188

INTERCHANGEABILITY TABLE

THE KEYS COVERED BY DASH NUMBERS GIVEN IN MS21261 ARE CANCELLED AFTER 23 MAY 1966; DASH NUMBERS GIVEN IN AN280 ARE CANCELLED AFTER 5 APRIL 1971. USE THE DASH NUMBERS GIVEN IN THE PRECEDING SHEETS. THE CANCELLED KEYS SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE NEW KEYS FOR DESIGN AND REPLACEMENT. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE.

CANCELLED				SUPERSEDING
MS21261	AN280			MS35756
	CARBON STEEL	ALLOY STEEL		
		STD FOR OPTIONAL DESIGN	CHAMFERED	
DASH NUMBER				DASH NUMBER
R202	202	H202	R202	1
R204	204	H204	R204	4
R304	304	H304	R304	5
R305	305	H305	R305	7
R404	404	H404	R404	6
R405	405	H405	R405	8
R406	406	H406	R406	10
R505	505	H505	R505	9
R506	506	H506	R506	11
R507	507	H507	R507	13
R606	606	H606	R606	12
R607	607	H607	R607	14
R608	608	H608	R608	16
R609	609	H609	R609	19
R807	807	H807	R807	15
R808	808	H808	R808	17
R809	809	H809	R809	20
R810	810	H810	R810	22
R811	811	H811	R811	25
R812	812	H812	R812	28
R1008	1008	H1008	R1008	18
R1009	1009	H1009	R1009	21
R1010	1010	H1010	R1010	23
R1011	1011	H1011	R1011	26
R1012	1012	H1012	R1012	29
R1210	1210	H1210	R1210	24
R1211	1211	H1211	R1211	27
R1212	1212	H1212	R1212	30

PREPARING ACTIVITY: ARMY-AR
CUSTODIANS: ARMY-AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW: AV,AS,IS,MI,NS
USER: AT,GL,ME,MC,SH
PROJECT NUMBER: 5315-0454

MILITARY SPECIFICATION SHEET
TITLE
KEY, WOODRUFF, STEEL, ALLOY, WITH KEYWAY AND KEY SLOT DIMENSIONS

SPECIFICATION SHEET NUMBER
MS35756E 30 NOV 90
SUPERSEDING
MS35756D 1 JUN 88
AMSC- N/A FSC - 5315

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672 MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://daasist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.