INCH-POUND

MS35764H

12 August 2022

SUPERSEDING

MS35764G

17 June 2021

DETAIL SPECIFICATION SHEET

BOLT, SELF-LOCKING, HEXAGON HEAD, STEEL, GRADE 8, UNC-2A AND UNF-2A

This specification sheet is approved for all Departments and Agencies of the Department of Defense.

The requirements for acquiring the described herein shall consist of this specification sheet and procurement specification MIL-DTL-45912.

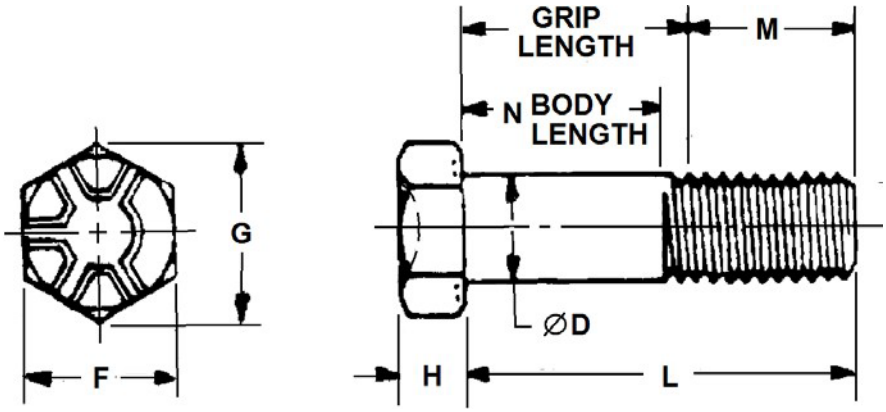


FIGURE 1. Bolt, self-locking.

Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 5306

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-28T17:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions *.

NOMINAL SIZE		0.250				0.3125				0.375				0.500			
THREADS PER INCH		20	28			18	24			16	24			13	20		
BODY MAX ØD DIAMETER MIN		0.250 0.245				0.3125 0.3065				0.375 0.369				0.500 0.493			
ACROSS F FLATS	MAX MIN	0.500 0.489				0.562 0.551				0.625 0.612				0.812 0.798			
ACROSS G CORNERS	MAX MIN	0.577 0.557				0.650 0.628				0.722 0.698				0.936 0.910			
HEAT H HEIGHT	MAX MIN	0.135 0.125				0.198 0.188				0.260 0.250				0.327 0.312			
THREAD M LENGTH	REF	0.750				0.875				1.000				1.250			
UNTHREADED * N BODY LGT	MAX	0.125	0.089			0.139	0.104			0.156	0.104			0.192	0.125		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
0.750	CAD	1201	1223			1245	1267			1289	1311			1395	1425		
	PHOS	1202	1224			1246	1268			1290	1312			1396	1426		
	ZNNI-K16	6001	6089			6007	6095			6015	6103			6025	6113		
0.875	CAD	1203	1225			1247	1269			1291	1313			1397	1427		
	PHOS	1204	1226		0.125	1248	1270			1292	1314			1398	1428		
	ZNNI-K16	6002	6090			6008	6096			6016	6104			6026	6114		
1.000	CAD	1205	1227			1249	1271			1293	1315			1399	1429		
	PHOS	1206	1228		0.250	1250	1272			1294	1316			1400	1430		
	ZNNI-K16	6003	6091			6009	6097			6017	6105			6027	6115		
1.250	CAD	1207	1229			1251	1273			1295	1317			1401	1431		
	PHOS	1208	1230	0.100	0.500	1252	1274		0.375	1296	1318		0.250	1402	1432		
	ZNNI-K16	6004	6092			6010	6098			6018	6106			6028	6116		
1.500	CAD	1209	1231			1253	1275			1297	1319			1403	1433		
	PHOS	1210	1232	0.350	0.750	1254	1276	0.208	0.625	1298	1320	0.062	0.500	1404	1434		0.250
	ZNNI-K16	6005	6093			6011	6099			6019	6107			6029	6117		
1.750	CAD	1211	1233			1255	1277			1299	1321			1405	1435		
	PHOS	1212	1234	0.600	1.000	1256	1278	0.458	0.875	1300	1322	0.312	0.750	1406	1436	0.019	0.500
	ZNNI-K16	6006	6094			6012	6100			6020	6108			6030	6118		
2.000	CAD					1257	1279			1301	1323			1407	1437		
	PHOS					1258	1280	0.708	1.125	1302	1324	0.562	1.000	1408	1438	0.269	0.750
	ZNNI-K16					6013	6101			6021	6109			6031	6119		
2.250	CAD					1259	1281			1303	1325			1409	1439		
	PHOS					1260	1282	0.958	1.375	1304	1326	0.812	1.250	1410	1440	0.519	1.000
	ZNNI-K16					6014	6102			6022	6110			6032	6120		
2.500	CAD									1305	1327			1411	1441		
	PHOS									1306	1328	1.062	1.500	1412	1442	0.769	1.250
	ZNNI-K16									6023	6111			6033	6121		
2.750	CAD									1307	1329			1413	1443		
	PHOS									1308	1330	1.312	1.750	1414	1444	1.019	1.500
	ZNNI-K16									6024	6112			6034	6122		
3.000	CAD													1415	1445		
	PHOS													1416	1446	1.269	1.750
	ZNNI-K16													6035	6123		
3.250	CAD													1417	1447		
	PHOS													1418	1448	1.519	2.000
	ZNNI-K16													6036	6124		
3.500	CAD													1419	1449		
	PHOS													1420	1450	1.769	2.250
	ZNNI-K16													6037	6125		
3.750	CAD													1421	1451		
	PHOS													1422	1452	2.019	2.500
	ZNNI-K16													6038	6126		

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and dimensions * – Continued.

NOMINAL SIZE		0.625				0.750				1.000				1.250			
THREADS PER INCH		11	18			10	16			8	12			7	12		
BODY MAX ØD DIAMETER MIN		0.625 0.617				0.750 0.741				1.000 0.990				1.250 1.219			
ACROSS F FLATS	MAX MIN	1.000 0.983				1.125 1.100				1.500 1.477				1.875 1.850			
ACROSS G CORNERS	MAX MIN	1.155 1.121				1.299 1.261				1.732 1.684				2.165 2.066			
HEAT H HEIGHTS	MAX MIN	0.390 0.375				0.458 0.438				0.582 0.562				0.697 0.677			
THREAD M LENGTH	REF	1.500				1.750				2.250				2.750			
UNTHREADED * N BODY LGT	MAX	0.227	0.139			0.250	0.156			0.312	0.208			0.357	0.208		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
1.000	CAD	1515	1543														
	PHOS	1516	1544														
	ZNNI-K16	6039	6127														
1.250	CAD	1517	1545			1571	1599										
	PHOS	1518	1546			1572	1600										
	ZNNI-K16	6040	6128			6053	6141										
1.500	CAD	1519	1547			1573	1601										
	PHOS	1520	1548			1574	1602										
	ZNNI-K16	6041	6129			6054	6142										
1.750	CAD	1521	1549			1575	1603			1679	1705						
	PHOS	1522	1550		0.250	1576	1604			1680	1706						
	ZNNI-K16	6042	6130			6055	6143			6066	6154						
2.000	CAD	1523	1551			1577	1605			1681	1707			1729	1753		
	PHOS	1524	1552		0.500	1578	1606		0.250	1682	1708			1730	1754		
	ZNNI-K16	6043	6131			6056	6144			6067	6155			6078	6166		
2.250	CAD	1525	1553			1579	1607			1683	1709			1731	1755		
	PHOS	1526	1554		0.750	1580	1608		0.500	1684	1710			1732	1756		
	ZNNI-K16	6044	6132			6057	6145			6068	6156			6079	6167		
2.500	CAD	1527	1555			1581	1609			1685	1711			1733	1757		
	PHOS	1528	1556	0.227	1.000	1582	1610		0.750	1686	1712			1734	1758		
	ZNNI-K16	6045	6133			6058	6146			6069	6157			6080	6168		
2.750	CAD	1529	1557			1583	1611			1687	1713			1735	1759		
	PHOS	1530	1558	0.477	1.250	1584	1612	0.200	1.000	1688	1714		0.500	1736	1760		
	ZNNI-K16	6046	6134			6059	6147			6070	6158			6081	6169		
3.000	CAD	1531	1559			1585	1613			1689	1715			1737	1761		
	PHOS	1532	1560	0.727	1.500	1586	1614	0.450	1.250	1690	1716		0.750	1738	1762		
	ZNNI-K16	6047	6135			6060	6148			6071	6159			6082	6170		
3.250	CAD	1533	1561			1587	1615			1691	1717			1739	1763		
	PHOS	1534	1562	0.977	1.750	1588	1616	0.700	1.500	1692	1718	0.125	1.000	1740	1764		0.500
	ZNNI-K16	6048	6136			6061	6149			6072	6160			6083	6171		
3.500	CAD	1535	1563			1589	1617			1693	1719			1741	1765		
	PHOS	1536	1564	1.227	2.000	1590	1618	0.950	1.750	1694	1720	0.375	1.250	1742	1766		0.750
	ZNNI-K16	6049	6137			6062	6150			6073	6161			6084	6172		
3.750	CAD	1537	1565			1591	1619			1695	1721			1743	1767		
	PHOS	1538	1566	1.477	2.250	1592	1620	1.200	2.000	1696	1722	0.625	1.500	1744	1768	0.071	1.000
	ZNNI-K16	6050	6138			6063	6151			6074	6162			6085	6173		
4.000	CAD	1539	1567			1593	1621			1697	1723			1745	1769		
	PHOS	1540	1568	1.727	2.500	1594	1622	1.450	2.250	1698	1724	0.875	1.750	1746	1770	0.321	1.250
	ZNNI-K16	6051	6139			6064	6152			6075	6163			6086	6174		
4.500	CAD	1541	1569			1595	1623			1699	1725			1747	1771		
	PHOS	1542	1570	2.227	3.000	1596	1624	1.950	2.750	1700	1726	1.375	2.250	1748	1772	0.821	1.750
	ZNNI-K16	6052	6140			6065	6153			6076	6164			6087	6175		
5.000	CAD									1701	1727			1749	1773		
	PHOS									1702	1728	1.875	2.750	1750	1774	1.321	2.250
	ZNNI-K16									6077	6165			6088	6176		

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE II. Length tolerance.

NOMINAL SIZE	0.250 0.3125 0.375	0.4375 0.500	0.5625 0.625 0.750	0.875 1.000	1.250
LENGTH	TOLERANCE (+0.000)				
THRU 1.000	-0.030	-0.030	-0.030		
OVER 1.000 THRU 2.500	-0.040	-0.060	-0.080	-0.100	-0.120
OVER 2.500 THRU 4.000	-0.060	-0.080	-0.100	-0.140	-0.160
OVER 4.000				-0.160	-0.180

REQUIREMENTS:

1. Material: Steel, SAE J429 Grade 8 in accordance with procurement specification.

2. Protective coating:

a. Cadmium/1 plated in accordance with SAE AMS-QQ-P-416, Type II, Class 2.
b. Zinc phosphate coated in accordance with MIL-DTL-16232, Type Z, Class 2.
c. Zinc-Nickel plated in accordance with MIL-PRF-32647, Type K16.

/1 NOTE: Both cadmium and hexavalent chromium are R1, R2, and D1 hazardous substances in the Aerospace and Defense Declarable Substance List. Zinc-Nickel per MIL-PRF-32647, Type K16 is a preferred alternate for Cadmium plating. The use of cadmium plating for Army and Marine ground vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

3. Threads. Threads shall be in accordance with FED-STD-H28.

4. Dimensions. All dimensions are in inches.

5. Head dimensions. For head dimensions see procurement specifications.

6. Unthreaded length. For any bolts in Table I that do not have a GRIP LGT MAX listed, the part is classified as fully threaded. The distance from under the head to the first complete (full form) thread, as measured with a ring thread gage, shall not exceed the unthreaded - body length "N".

7. Head markings. Heads shall be marked on top with the manufacturer's identification and the number 8 to designate Grade 8 material. Raised marking are preferred.

8. Part number. The MS part number consists of the MS number, plus the dash number.

Example: MS35764-1201 = 0.250 x 20 threads per inch x 0.750, Cadmium plated, Type II, Class 2.
Example: MS35764-1202 = 0.250 x 20 threads per inch x 0.750, Zinc Phosphate coated, Type Z, Class 2.
Example: MS35764-6001 = 0.250 x 20 threads per inch x 0.750, Zinc- Nickel plated, Type K16.

9. Referenced documents. Referenced documents shall be of the issue in effect as of the date of invitation for bid. In addition to MIL-DTL-45912, this document references the following:

FED-STD-H28 MIL-DTL-16232 MIL-PRF-32647 SAE AMS-QQ-P-416 SAE J429

10. Design feature. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

11. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE III. Grade 8 – Reference Information Only.

NOMINAL SIZE	THREADS PER INCH	PROOF LOAD LBS (MIN)	RECOMMENDED AXIAL LOAD (LBS)
0.250	20	3800	2850
	28	4350	3263
0.3125	18	6300	4725
	24	6950	5213
0.375	16	9300	6975
	24	10550	7913
0.500	13	17050	12788
	20	19200	14363
0.625	11	27100	20325
	18	30700	23025
0.750	10	40100	30075
	16	44750	33563
1.000	8	72700	54525
	12	79550	59663
1.250	7	116300	87225
	12	128750	96563

NOTES:

1. Axial load based upon 75% of proof load value.
2. The self-locking feature of these bolts is full effective when tightened to the recommended axial load shown herein. Lockwashers or locknuts are not needed (see note 4).
3. Refer to assembly drawings for torque values.
4. Where material softer than the bolt material is fastened, plain washer of material as hard as the bolt of adequate thickness and larger in diameter than the bolt shall be used under the bolt head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Inactive part numbers and dimensions.

The following former dash numbers of MS35764 are INACTIVE FOR NEW DESIGN AFTER 15 MAY 1973. These inactive dash numbers have smaller "F" and "G" dimensions than the new dash numbers in TABLE I and have Type II, Class 3 cadmium plating per SAE AMS-QQ-P-416.

Zn-Ni plated alternative dash numbers have been added as clean alternatives to cadmium for legacy systems which still utilize these parts, but they remain inactive for new design.

NOMINAL SIZE		.250				.3125				.375				.4375			
THREADS PER INCH		20	28			18	24			16	24			14	20		
BODY D DIAMETER	MAX	.250				.3125				.375				.4375			
	MIN	.245				.3065				.369				.4305			
ACROSS F FLATS	MAX	.436				.500				.562				.625			
	MIN	.428				.489				.551				.612			
ACROSS G CORNERS	MAX	.505				.577				.650				.722			
	MIN	.488				.557				.628				.698			
HEAT H HEIGHT	MAX	.135				.198				.260				.291			
	MIN	.125				.188				.250				.281			
THREAD M LENGTH	REF	.750				.875				1.000				1.250			
UNTHREADED * N BODY LGT	MAX	.125	.089			.139	.104			.156	.104			.179	.125		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
.750	CAD PHOS ZNNI-K16	803 203 7000	1003 603 7141			817 217 7011	1017 617 7152			831 231 7022	1031 631 7163			846 246 7033	1046 646 7175		
.875	CAD PHOS ZNNI-K16	804 204 7001	1004 604 7142		.125	818 218 7012	1018 618 7153			832 232 7023	1032 632 7164			847 247 7034	1047 647 7176		
1.000	CAD PHOS ZNNI-K16	805 205 7002	1005 605 7143		.250	819 219 7013	1019 619 7154			833 233 7024	1033 633 7165			848 248 7035	1048 648 7177		
1.250	CAD PHOS ZNNI-K16	807 207 7003	1007 607 7144	.100	.500	821 221 7014	1021 621 7155		.375	835 235 7025	1035 635 7166		.250	850 250 7036	1050 650 7178		
1.500	CAD PHOS ZNNI-K16	808 208 7004	1008 608 7145	.350	.750	822 222 7015	1022 622 7156	.208	.625	836 236 7026	1036 636 7167	.062	.500	851 251 7037	1051 651 7179		.375
1.750	CAD PHOS ZNNI-K16	809 209 7005	1009 609 7146	.600	1.000	823 223 7016	1023 623 7157	.458	.875	837 237 7027	1037 637 7168	.312	.750	852 252 7038	1052 652 7180	.161	.625
2.000	CAD PHOS ZNNI-K16	810 210 7006	1010 610 7147	.850	1.250	824 224 7017	1024 624 7158	.708	1.125	838 238 7028	1038 638 7169	.562	1.000	853 253 7039	1053 653 7181	.411	.875
2.250	CAD PHOS ZNNI-K16	811 211 7007	1011 611 7148	1.100	1.500	825 225 7018	1025 625 7159	.958	1.375	839 239 7029	1039 639 7170	.812	1.250	854 254 7040	1054 654 7182	.661	1.125
2.500	CAD PHOS ZNNI-K16	812 212 7008	1012 612 7149	1.350	1.750	826 226 7019	1026 626 7160	1.208	1.625	840 240 7030	1040 640 7171	1.062	1.500	855 255 7041	1055 655 7183	.911	1.375
2.750	CAD PHOS ZNNI-K16	813 213 7009	1013 613 7150	1.600	2.000	827 227 7020	1027 627 7161	1.458	1.875	841 241 7031	1041 641 7172	1.312	1.750	856 256 7042	1056 656 7184	1.161	1.625
3.000	CAD PHOS ZNNI-K16	814 214 7010	1014 614 7151	1.850	2.250	828 228 7021	1028 628 7162	1.708	2.125	842 242 7032	1042 642 7173	1.562	2.000	857 257 7043	1057 657 7185	1.411	1.875
3.250	CAD PHOS ZNNI-K16													858 258 7044	1058 658 7186	1.661	2.125
3.500	CAD PHOS ZNNI-K16										1044 644 7174	2.062	2.500	859 259 7045	1059 659 7187	1.911	2.375
3.750	CAD PHOS ZNNI-K16													860 260 7046	1060 660 7188	2.161	2.625
4.000	CAD PHOS ZNNI-K16													861 261 7047	1061 661 7189	2.411	2.875

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Inactive part numbers and dimensions – Continued.

NOMINAL SIZE		.500				.5625				.625				.750			
THREADS PER INCH		13	20			12	18			11	18			10	16		
BODY DIAMETER	MAX ØD	.500				.5625				.625				.750			
	MIN	.493				.5545				.617				.741			
ACROSS F FLATS	MAX	.750				.812				.875				1.000			
	MIN	.736				.798				.860				.983			
ACROSS G CORNERS	MAX	.866				.938				1.010				1.155			
	MIN	.840				.910				.980				1.121			
HEAT H HEIGHT	MAX	.327				.390				.390				.456			
	MIN	.312				.375				.375				.438			
THREAD M LENGTH	REF	1.250				1.375				1.500				1.750			
UNTHREADED * N BODY LGT	MAX	.192	.125			.208	.139			.227	.139			.250	.156		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
.750	CAD	864	1064			882	1082										
	PHOS	264	664			282	682										
	ZNNI-K16	7048	7190			7063	7205										
.875	CAD	865	1065			883	1083										
	PHOS	265	665			283	683										
	ZNNI-K16	7049	7191			7064	7206										
1.000	CAD	866	1066			884	1084			900	1100				1116		
	PHOS	266	666			284	684			300	700				716		
	ZNNI-K16	7050	7192			7065	7207			7078	7220				7234		
1.250	CAD	868	1068			886	1086			902	1102			918	1118		
	PHOS	268	668			286	686			302	702			318	718		
	ZNNI-K16	7051	7193			7066	7208			7079	7221			7092	7235		
1.500	CAD	869	1069			887	1087			903	1103			919	1119		
	PHOS	269	669		.250	287	687			303	703			319	719		
	ZNNI-K16	7052	7194			7067	7209			7080	7222			7093	7236		
1.750	CAD	870	1070			888	1088			904	1104			920	1120		
	PHOS	270	670	.019	.500	288	688		.375	304	704		.250	320	720		
	ZNNI-K16	7053	7195			7068	7210			7081	7223			7094	7237		
2.000	CAD	871	1071			889	1089			905	1105			921	1121		
	PHOS	271	671	.289	.750	289	689		.625	305	705		.500	321	721		.250
	ZNNI-K16	7054	7196			7069	7211			7082	7224			7095	7238		
2.250	CAD	872	1072			890	1090			906	1106			922	1122		
	PHOS	272	672	.519	1.000	290	690	.125	.875	306	706		.750	322	722		.500
	ZNNI-K16	7055	7197			7070	7212			7083	7225			7096	7239		
2.500	CAD	873	1073			891	1091			907	1107			923	1123		
	PHOS	273	673	.769	1.250	291	691	.375	1.125	307	707	.227	1.000	323	723		.750
	ZNNI-K16	7056	7198			7071	7213			7084	7226			7097	7240		
2.750	CAD	874	1074			892	1092			908	1108			924	1124		
	PHOS	274	674	1.019	1.500	292	692	.625	1.375	308	708	.477	1.250	324	724	.202	1.000
	ZNNI-K16	7057	7199			7072	7214			7085	7227			7098	7241		
3.000	CAD	875	1075			893	1093			909	1109			925	1125		
	PHOS	275	675	1.269	1.750	293	693	.875	1.625	309	709	.727	1.500	325	725	.450	1.250
	ZNNI-K16	7058	7200			7073	7215			7086	7228			7099	7242		
3.250	CAD	876	1076			894	1094			910	1110			926	1126		
	PHOS	276	676	1.519	2.000	894	694	1.125	1.875	310	710	.977	1.750	326	726	.700	1.500
	ZNNI-K16	7059	7201			7074	7216			7087	7229			7100	7243		
3.500	CAD	877	1077			895	1095			911	1111			927	1127		
	PHOS	277	677	1.769	2.250	295	695	1.375	2.125	311	711	1.227	2.000	327	727	.950	1.750
	ZNNI-K16	7060	7202			7075	7217			7088	7230			7101	7244		
3.750	CAD	878	1078			896	1096			912	1112			928	1128		
	PHOS	278	678	2.019	2.500	296	696	1.625	2.375	312	712	1.477	2.250	328	728	1.200	2.000
	ZNNI-K16	7061	7203			7076	7218			7089	7231			7102	7245		
4.000	CAD	879	1079			897	1097			913	1113			929	1129		
	PHOS	279	679	2.269	2.750	297	697	1.875	2.675	313	713	1.727	2.500	329	729	1.450	2.250
	ZNNI-K16	7062	7204			7077	7219			7090	7232			7103	7246		
4.500	CAD									914	1114			930	1130		
	PHOS									314	714	2.227	3.000	330	730	1.950	2.750
	ZNNI-K16									7091	7233			7104	7247		

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Inactive part numbers and dimensions – Continued.

NOMINAL SIZE		.875				1.000				1.250			
THREADS PER INCH		9	14			8	12			7	12		
BODY ØD DIAMETER	MAX	.875				1.000				1.250			
	MIN	.866				.990				1.239			
ACROSS F FLATS	MAX	1.125				1.312				1.688			
	MIN	1.100				1.292				1.663			
ACROSS G CORNERS	MAX	1.299				1.516				1.949			
	MIN	1.261				1.473				1.896			
HEAD H HEIGHT	MAX	.520				.582				.697			
	MIN	.500				.562				.677			
M THREAD LENGTH REF		2.000				2.250				2.750			
UNTHREADED * N BODY LENGTH	MAX	.278	.179			.312	.206			.357	.208		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
1.250	CAD		1133				1148						
	PHOS		733				748						
	ZNNI-K16		7248				7262						
1.500	CAD	934	1134								1177		
	PHOS	334	734								777		
	ZNNI-K16	7105	7249								7275		
1.750	CAD	935	1135			950	1150						
	PHOS	335	735			350	750						
	ZNNI-K16	7106	7250			7118	7263						
2.000	CAD	936	1136			951	1151			979	1179		
	PHOS	336	736			351	751			379	779		
	ZNNI-K16	7107	7251			7119	7264			7130	7276		
2.250	CAD	937	1137			952	1152			980	1180		
	PHOS	337	737			352	752			380	780		
	ZNNI-K16	7108	7252			7120	7265			7131	7277		
2.500	CAD	938	1138			953	1153			981	1181		
	PHOS	338	738		.500	353	753			381	781		
	ZNNI-K16	7109	7253			7121	7266			7132	7278		
2.750	CAD	939	1139			954	1154			982	1182		
	PHOS	339	739		.750	354	754		.500	382	782		
	ZNNI-K16	7110	7254			7122	7267			7133	7279		
3.000	CAD	940	1140			955	1155			983	1183		
	PHOS	340	740	.167	1.000	355	755		.750	383	783		
	ZNNI-K16	7111	7255			7123	7268			7134	7280		
3.250	CAD	941	1141			956	1156			984	1184		
	PHOS	341	741	.417	1.250	356	756	.125	1.000	384	784		.500
	ZNNI-K16	7112	7256			7124	7269			7135	7281		
3.500	CAD	942	1142			957	1157			985	1185		
	PHOS	342	742	.667	1.500	357	757	.375	1.250	385	785		.750
	ZNNI-K16	7113	7257			7125	7270			7136	7282		
3.750	CAD	943	1143			958	1158			986	1186		
	PHOS	343	743	.917	1.750	358	758	.625	1.500	386	786	.071	1.000
	ZNNI-K16	7114	7258			7126	7271			7137	7283		
4.000	CAD	944	1144			959	1159			987	1187		
	PHOS	344	744	1.167	2.000	359	759	.875	1.750	387	787	.321	1.250
	ZNNI-K16	7115	7259			7127	7272			7138	7284		
4.500	CAD	945	1145			960	1160			988	1188		
	PHOS	345	745	1.667	2.500	360	760	1.375	2.250	388	788	.821	1.750
	ZNNI-K16	7116	7260			7128	7273			7139	7285		
5.000	CAD	946	1146			961	1161			989	1189		
	PHOS	346	746	2.167	3.000	361	761	1.875	2.750	389	789	1.321	2.250
	ZNNI-K16	7117	7261			7129	7274			7140	7286		

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - OS
DLA - GS

Preparing Activity:
Army - AT

(Project 5306-2022-022)

Review Activities:
Army - CR4, MI
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.