INCH-POUND

MIL-DTL-3628/224A
15 October 2007
SUPERSEDING
MIL-DTL-3628/224
23 October 2002

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE SAFETY DEVICE, COAST GUARD AUXILIARY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

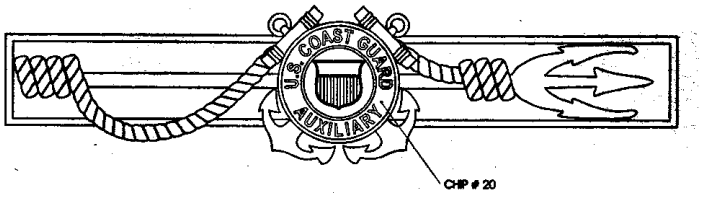

ASSEMBLED

DEVICE



BASE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH:

BASE: Gold Plated, Matte Finished, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DEVICE:
- SILVER AREAS (crossed anchors, lettering, inner and outer circular rims): Soft Enameled or Epoxied, Silver Plated, Matte Finished, Polished Highlights, and shall match TIOH Metal Finish Chip Number 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

- GOLD AREAS (central shield and background around shield): Gold Plated, Matte Finished, Polished Highlights, and shall match the TIOH Metal Finish Chip Number 8.

DIMENSIONS:

BASE:
HEIGHT (at device mount and rope loops):
-1: 1/2 inch
-2: 1/4 inch
WIDTH:
-1: 2-3/4 inches
-2: 1-3/8 inches
THICKNESS (at thickest point):
-1: 0.140 ± 0.010 inch
-2: 0.100 ± 0.005 inch

DEVICE:
DIAMETER (circumscribed):
-1: 13/16 inch
-2: 13/32 inch
THICKNESS (at thickest point):
-1: 0.085 ± 0.005 inch
-2: 0.075 ± 0.005 inch

NOTES:

1. The device shall be superimposed on the base (as shown) and secured by two rivets or by soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center of the device.

2. Enameled/epoxied areas shall be as shown. Epoxy resin (stoning epoxy) may be at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material.

3. Design elements shall be as follows:

BASE:
Trident and rope shall be raised and modeled.
Background shall be recessed and textured.
DEVICE:
Anchors shall be modeled.
Lettering shall read "U.S. COAST GUARD" at the top and "AUXILIARY" at the bottom.
Circular area surrounding the lettering shall be filled with soft enamel or epoxy conforming to TIOH Hard Enamel Color Chip Number 20.

3. Attaching device shall be prong and flat ball type clutch. Two prongs shall be located on the reverse on the horizontal center line. For -1, the prongs shall be 1/4 inch from each side; for -2, the prongs shall be 1/8 inch from each side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2008-005)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.