INCH-POUND


MIL-DTL-3628/225A
22 April 2005
SUPERSEDING
MIL-DTL-3628/225
12 December 2002

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, POLICE, DEPARTMENT OF THE ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

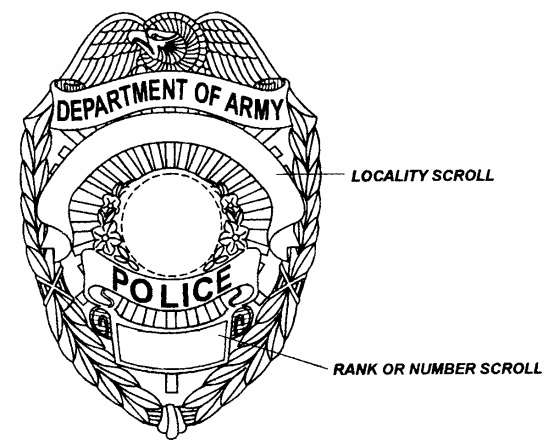


**BASE**




**RANKS**




**DEVICE**

DASH NO.
-1 Police
-2 Supervisory Police

MATERIAL: Not less than 85/15 Rich-Low Brass

FINISH:

-1: Hard Enameled or Epoxied, Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
-2: Hard Enameled or Epoxied, Gold Plated, Mirror-like Polished, and shall match (TIOH) Metal Finish Chip Number 6.

DIMENSIONS:

BASE:
WIDTH: 2-3/16 inches (REF)
HEIGHT: 3-1/16 inches (REF)
THICKNESS (at thickest point): 0.120 ± 0.010 inch



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

DEVICE:
DIAMETER: 3/4 inch (REF)
THICKNESS (at thickest point): 0.075 ± 0.005 inch

ASSEMBLED THICKNESS: 0.145 ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die. TIOH Drawing Number B-5-158 shall be used as additional reference.

2. A full forcer shall be used to bring up the details of the base design.

3. The badge shall be dapped to a radius of 5 inches ± 1/4 inch along the horizontal plane.

4. Engraving on the base shall be as detailed below:

TOP SCROLL, -1 & -2: "DEPARTMENT OF ARMY" already engraved in government furnished die.

SECOND SCROLL, -1 & -2: Engraved as required for the base locality, i.e., "FORT BELVOIR." Letters shall be approximately 3/16 inch in height and block style.

THIRD SCROLL, -1 & -2: "POLICE" already engraved in government furnished die.

BOTTOM SCROLL (Letters or numbers on the bottom scroll shall be approximately 1/4 inch in height and block style.):
-1: Engraved consecutively as specified in the procurement document for badge number, i.e., "165," "166."
-2: Engraved as required for ranks of "CHIEF," "CAPT," "LT," and "SGT."

5. Enamel/epoxy colors shall conform to TIOH Hard Enamel Chip Colors indicated below for both -1 and -2:

| | |
|---|---|
| BASE: | |
| Engraving in all four scrolls | Ultramarine Blue #18 |
| DEVICE (also see TIOH Drawing B-5-158): | |
| Flag stripes | Alternating Scarlet #1 & White #28 |
| Background of stars in flag | Ultramarine Blue #18 |
| Stars above Liberty Bell | Ultramarine Blue #18 |
| Background around flag & Liberty Bell | White #28 |
| Motto band | Ultramarine Blue #18 |

When hard enamel is used, the material requirement shall be 95/5 gilding metal. When epoxy is used, the material may be 85/15 rich-low brass.

6. The attaching device shall be a coil type pin with heavy-duty catch. The pin stem shall be 2 inches ± 1/64 inch long. The pin and catch shall be hard soldered or fused on



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

the vertical center line between the top and bottom scrolls. The joint and catch shall be positioned on the same level plane to each other.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0180/001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.