NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/226D(IH)
24 July 2024
SUPERSEDING
MIL-DTL-3628/226C(IH)
24 September 2019

DETAIL SPECIFICATION SHEET

# BADGE, IDENTIFICATION, GUARD, DEPARTMENT OF THE ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

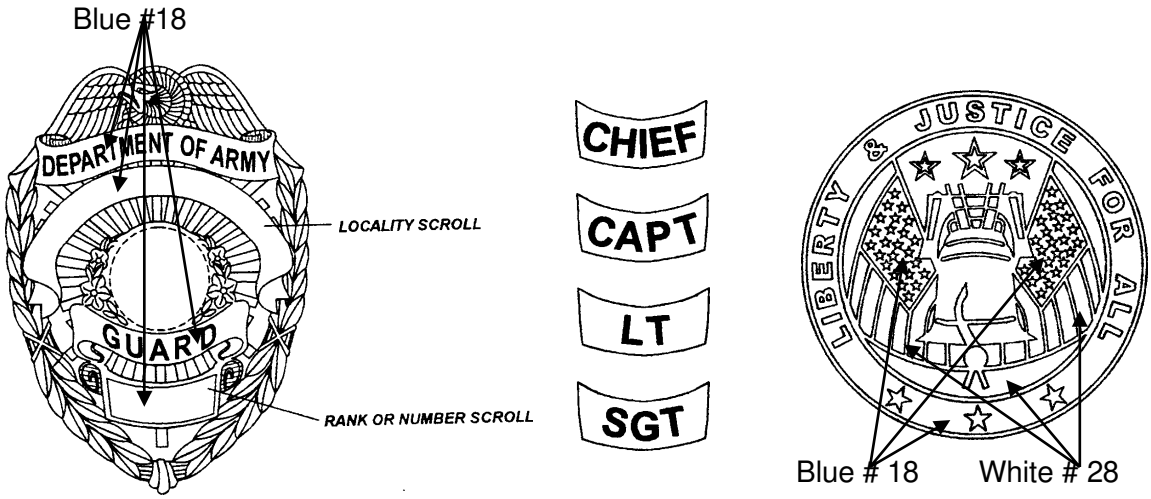


**BASE** **RANKS** **DEVICE**

DASH NO.
-1: Guard
-2: Supervisory Guard

MATERIAL: Red Brass 85/15 (UNS Alloy No. C230)

FINISH:
-1: Epoxy resin, Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-2: Epoxy resin, 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 6.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
WIDTH: 2-3/16 inches (REF)
HEIGHT: 3-1/16 inches (REF)
THICKNESS (At thickest point): 0.120 ± 0.010 inch
DEVICE:
DIAMETER: 3/4 inch (REF)
THICKNESS (At thickest point): 0.075 ± 0.010 inch
ASSEMBLED THICKNESS: 0.145 ± 0.010 inch

ATTACHING DEVICE:
1: The attaching device shall be a coil type pin with heavy-duty catch.

2: The pin stem shall be 2 inches ± 1/64 inch long.

3: The pin and catch shall be hard soldered or fused on the vertical center line between the top and bottom scrolls.

4: The joint and catch shall be positioned on the same level plane to each other.

Epoxy resin shall not be stoned. Both hard enamel and soft baked enamel may be used at the option of the manufacturer in lieu of epoxy resin. If hard enamel and soft baked enamel are used, then the material will be Gilding Metal 95/5 (UNS Alloy C-210). Epoxy and enamel colors shall conform to TIOH Hard Enamel Chip Numbers listed below:

| COLOR | CHIP NUMBER |
|---|---|
| White | 28 |
| Blue | 18 |

BASE:

| | |
|---|---|
| Engraving in all four scrolls | Ultramarine Blue #18 |

DEVICE (also see TIOH Drawing B-5-158):

| | |
|---|---|
| Flag stripes | White #28 |
| Background of stars in flag | Ultramarine Blue #18 |
| Stars above Liberty Bell | Ultramarine Blue #18 |
| Background around flag & Liberty Bell | White #28 |
| Motto band | Ultramarine Blue #18 |

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die. TIOH Drawing Number B-5-158 shall be used as additional reference.

2. A full forcer shall be used to bring up the details of the base design.

3. The badge shall be dapped to a radius of 5 inches ± 1/4 inch along the horizontal plane.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

4. Engraving on the base shall be as detailed below:

TOP SCROLL, -1 & -2: "DEPARTMENT OF ARMY" already engraved in government furnished die.

SECOND SCROLL, -1 & -2: Engraved as required for the base locality, i.e., "FORT BELVOIR." Letters shall be approximately 3/16 inch in height and block style.

THIRD SCROLL, -1 & -2: "POLICE" already engraved in government furnished die.

BOTTOM SCROLL (Letters or numbers on the bottom scroll shall be approximately 1/4 inch in height and block style.):

-1: Engraved consecutively as specified in the procurement document for badge number, i.e., "165," "166."

-2: Engraved as required for ranks of "CHIEF," "CAPT," "LT," and "SGT."

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-215)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.