INCH-POUND

MIL-DTL-3628/228
5 February 2003

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, HONOR GUARD, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.



DASH NO.
-1: Regular (with colors)
-2: Ceremonial (without colors)

MATERIAL:

-1: Gilding Metal
-2: Gilding Metal or Red Brass

FINISH:

-1: Enameled or Epoxied, Nickel Plated, Mirror-like Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
-2: Nickel Plated, Mirror-like Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSIONS:

DIAMETER: 2 inches (REF)
THICKNESS (at thickest point): 0.095 ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled/epoxied areas shall be as shown in Figure 1 for -1 only. The colors shall conform to TIOH Hard Enamel Chip numbers listed below:

COLOR	CHIP NUMBER
Scarlet	1
Ultramarine Blue	18
Black	26
White	28

3. Attaching device shall be prong and flat ball type clutch. Three prongs shall be located on the reverse on an approximate 1-3/4 inch diameter circle. Each prong shall be space 120° apart with the bottom prong located on the vertical center line at the bottom of the badge.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0110/001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:15Z
Check the source to verify that this is the current version before use.

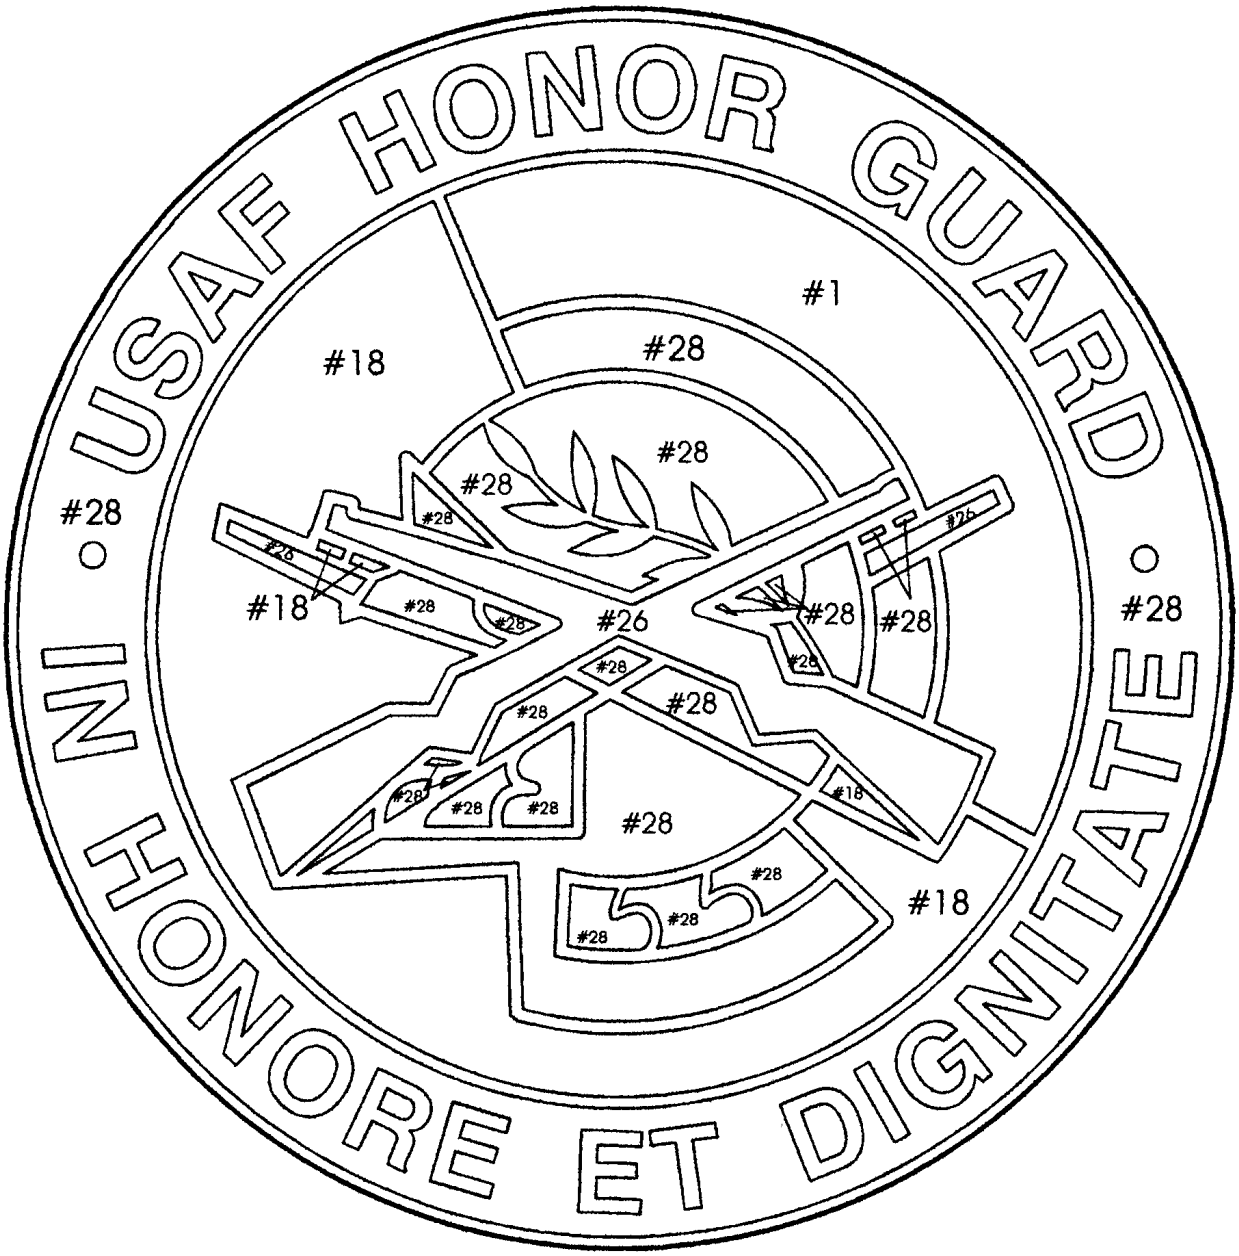


FIGURE 1. **Color placement for enamel/epoxy - regular badge.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:15Z
Check the source to verify that this is the current version before use.