INCH-POUND

MIL-DTL-3628/231
28 January 2004

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, BERET, SURVIVAL, EVASION, RESISTANCE AND ESCAPE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

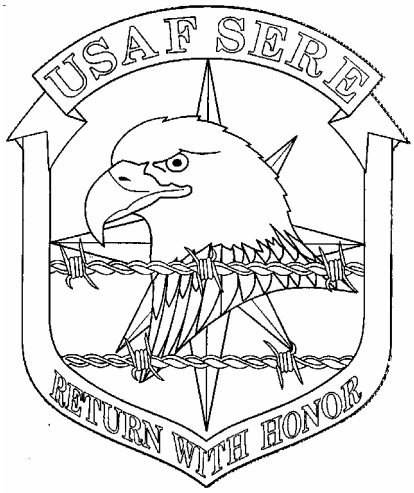

MATERIAL: Red Brass

FINISH: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finished, and shall match The Institute of Heraldry Metal Finish Chip Number 14.

DIMENSIONS:

HEIGHT: 1-3/8 inches (REF)
WIDTH (at widest point): 1-3/16 inch (REF)
THICKNESS (at thickest point): 0.080 ± 0.005 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be wing and clutch type. Two prongs shall be located on the reverse on the horizontal center line and approximately 13/16 inch apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:16Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH
(Project No. 8455-0137/001)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:16Z
Check the source to verify that this is the current version before use.