NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/231C
4 October 2021
SUPERSEDING
MIL-DTL-3628/231B
29 November 2016

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, BERET, SURVIVAL, EVASION, RESISTANCE AND ESCAPE, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and latest issue of MIL-DTL-3628.

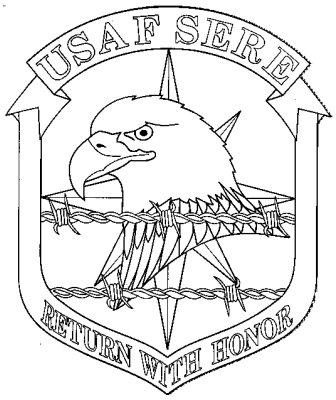

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Silver Plated, Oxidized, Buffed Relieved, Matte Finished, and shall match The Institute of Heraldry Metal Finish Chip Number 14.

DIMENSIONS:
HEIGHT: 1-3/8 inches (REF)
WIDTH (At widest point): 1-3/16 inch (REF)
THICKNESS (At thickest point): 0.080 ± 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be wing and clutch type.

2. Two prongs shall be located on the reverse on the horizontal center line and approximately 13/16 inch apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. As an alternate method of manufacturing for commercial sale only the badge may be Nickel or Rhodium Plated with a Mirror-like Polished Finish and shall match TIOH Metal Finish Chip Number 16.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-738)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:16Z
Check the source to verify that this is the current version before use.