NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/233C
08 March 2022
SUPERSEDING
MIL-DTL-3628/233B
17 May 2017

DETAIL SPECIFICATION SHEET

BADGE, OCCUPATIONAL, AVIATION, AIR CREW, U.S. COAST GUARD AUXILIARY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

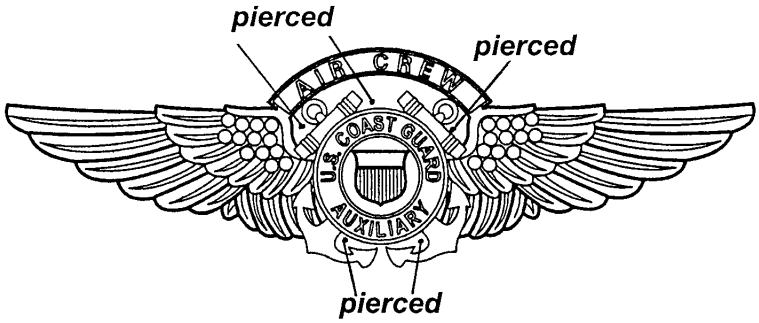

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

FINISH:
WINGS AND ANCHOR: Nickel Plated (Red Brass only), Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
AIR CREW TAB: Epoxied, Nickel Plated (Red Brass only), Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 16.
DISK WITH SHIELD: Epoxy resin, 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT (Overall):
-1: 7/8 inch (REF)
-2: 1/2 inch (REF)
WIDTH (Overall):
-1: 2-13/16 inch (REF)
-2: 1-3/8 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:17Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point):
-1: 0.092 ± 0.010 inch
-2: 0.081 ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing-type clutch.

2. Two prongs shall be located on the reverse on the horizontal center line.
-1: The prongs shall be located equidistant from each end and 1-15/16 inches ± 1/64 inch apart.

-2: The prongs shall be located equidistant from each end and 15/16 inches ± 1/64 inch apart

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210):

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Blue	#20

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated for the regular and miniature size badges except that the miniature size badge shall not be pierced between the anchor fluke and the disk.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-070)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:17Z
Check the source to verify that this is the current version before use.