MIL-B-87018A(NU)
4 June 1982
SUPERSEDING
MIL-B-87018(SA)
30 March 1976

MILITARY SPECIFICATION

BAG, MONEY

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a leather money bag.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-285	- Thread, Polyester
V-T-291	- Thread, Linen
V-T-295	- Thread, Nylon
FF-R-556	- Rivets, Solid, Small; Rivets, Split, Small, Rivets, Tubular Small; and Burr and Cap Rivets; General Purpose
KK-L-154	- Leather, Cattlehide (Bag and Case)
PPP-B-636	- Boxes, Shipping Fiberboard

MILITARY

MIL-F-10884	- Fasteners, Snap

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8460

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitchings
FED-STD-311 - Leather, Methods of Sampling and Testing

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of US Military Property

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement fuctions should be obtained from the procuring activity or as directed by the contracting officer).

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, D C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Leather. The leather used for the bag shall conform to type II, class 1, Style A or C of KK-L-154. The color shall be black. Thickness of the leather used for the front, bottom, back-top-flap piece, end panels, straps and partition shall be 7 1/2 (± 1/2) ounces. The leather used for the partition shall be dyed on both sides. As an alternate, leather conforming to 3.3.1.1 may be used for the partition. Thickness of the leather used for the corner reinforcements, loops and handle tab shall be 5 (± 1/2) ounces.

3.3.1.1 Leather, reinforcing. The leather used for the end flaps and end and bottom reinforcement panels shall be firm, vegetable tanned, split cattlehide. The color shall be black. The leather shall be mildew-resistant treated and shall meet the paranitrophenol requirements for leather in 3.3.1. Thickness of the leather shall be 5 (± 1/2) ounces. Testing shall be as specified in 4.3.1.

3.3.2 Thread. Thread used for stitching operations shall be as specified in 3.3.2.1, 3.3.2.2, 3.3.2.3 or 3.3.2.4. The color shall be black.

3.3.2.1 Thread, linen. The linen thread shall conform to Type B, Classes 1 or 2, 4 ply of V-T-291.

3.3.2.2 Thread, nylon. The nylon thread shall conform to Type I or II, Class 1, sub-class A, Size 3, 3 ply of V-T-295.

3.3.2.3 Thread, polyester. The polyester thread shall conform to Type I or II, Class 1, sub-class A, size 3, 3 ply of V-T-285.

3.3.2.4 Thread, cotton. The cotton thread shall conform to Type IVA or IVB, size No. 8, 4 ply of V-T-276.

3.3.3 Adhesive. The adhesive used for bonding any part of the bag shall be any suitable adhesive.

3.3.4 Rivets and caps. Rivets shall conform to Type XII, Class 3, Grade F of FF-R-556. The rivet caps shall conform to Type II (brass) of FF-R-556. As an alternate, the rivets and caps may be brass-plated steel and lacquered.

3.3.5 Studs. The studs used on the bottom of the bag shall be a commercial split type, with a hemispherical shaped head approximately 7/8 inch in diameter. The studs shall be brass or brass-plated steel and lacquered. The shank of the stud shall be of sufficient length to firmly attach the parts through which they are driven.

3.3.6 Snap fasteners. The snap fasteners shall conform to Style 2, finish 1 of MIL-F-10884.

3.3.7 Hasp, staple and lock. Each bag shall be equipped with a three, four or 6 hole, solid brass hasp and brass staple securely attached by small rivets and washers. The staple shall have an opening of approximately 5/16 inch diameter. The lock shall be a steel or brass, 1 inch pin tumbler padlock furnished with two keys. The hasp, staple and lock shall be sufficently durable and secure for the intended purpose. (See 6.4 and figure 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.3.8 Reinforcing board. The material used for reinforcing the bottom of the bag shall be a suitable pressboard, a minimum of 0.090 inches thick and of sufficient strength and stiffness to support the bottom of the bag. As an alternate, plywood of a suitable thickness may be used.

3.4 Design. The money bag shall be made of leather with a partition a reinforced bottom, two straps with handles, bottom metal studs and shall be equipped with a padlock and keys.

3.5 Figures. Figures 1 through 3 provide requirements for design features, dimensions and tolerances, and construction details, and are to be used in conjunction with the written construction requirements (see 3.7). Figures are not to scale.

3.6 Patterns. Patterns shall be furnished by the contractor.

3.7 Construction.

3.7.1 Cutting. All component parts shall be cut from leather specified in 3.3.1 and 3.3.1.1 so that the finished bag conforms to the required dimensions (see Figures 1 and 2), and is of the appropriate proportions to allow for proper assembly.


3.7.2 Assembly. The bag shall be assembled in accordance with Figures 1 through 3. The bottom reinforcement panel shall consist of a piece of leather (see 3.3.1.1) cemented to the reinforcing board (see 3.3.8). The finished leather side shall face toward the inside of the bag. The straps may be constructed from one or two pieces of leather, joined at the bottom of the bag under one or both strap loops. Each handle shall consist of that portion of the strap which is folded in half lengthwise and stitched together.

3.7.3 Stitching. All stitching shall be done using stitch type 301 with thread specified in 3.3.2 and with 4 to 7 stitches per inch. Ends of stitching shall either be securely caught in other stitching or reinforced with a rivet. Ends of a continuous line of stitching, as is used to attach strap loops to the front and back, (see Figure 2, detail (1)), shall overlap a minimum of three stitches. Stitching shall be 3/16 to 1/4 inch from edges, except that the stitching of the strap loops to the front and back and the stitching together of the straps to form the handles shall be approximately 1/8 inch from the edges. All thread ends shall be trimmed and removed.


3.7.4 Dimensions. Finished dimensions of the bag and components shall be as specified in Figures 1 and 2. When no tolerances are given, dimensions are approximate. The dimensions of the bottom reinforcement panel shall finish approximately 5 1/2 by 14 1/2 inches. The handle shall finish approximately 13 inches from rivet to rivet.

3.7.5 Finishing. Stain and finish all exposed cut edges of leather to match the color of the bag. Cement a thin piece of leather to the inside front of the bag to cover the staple plate rivets. Clean the inside and the outside of the bag.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

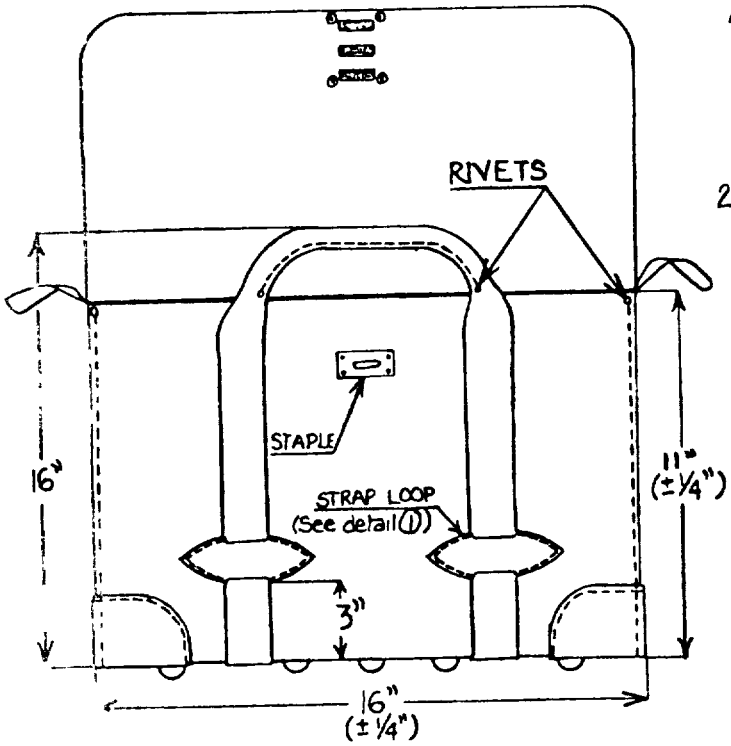


FRONT

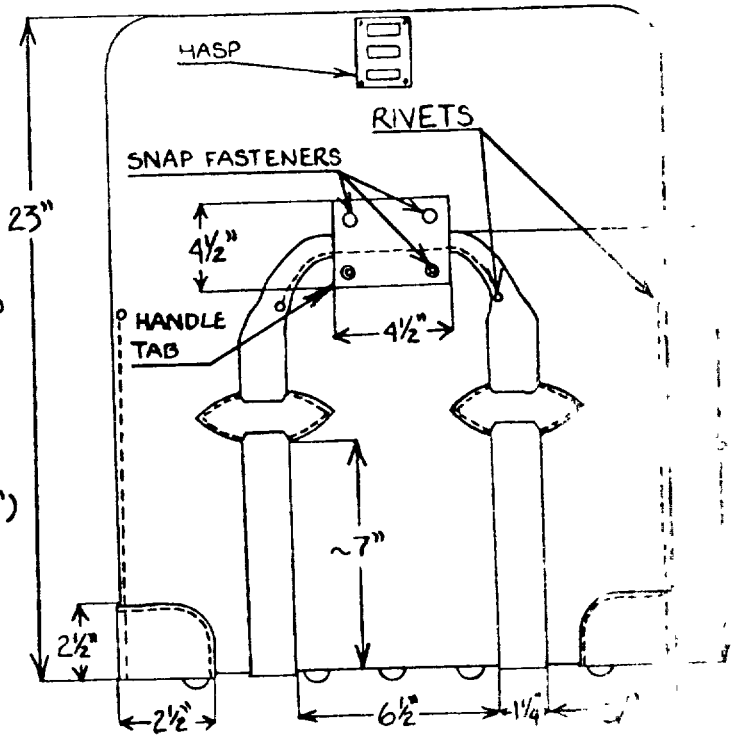

BACK

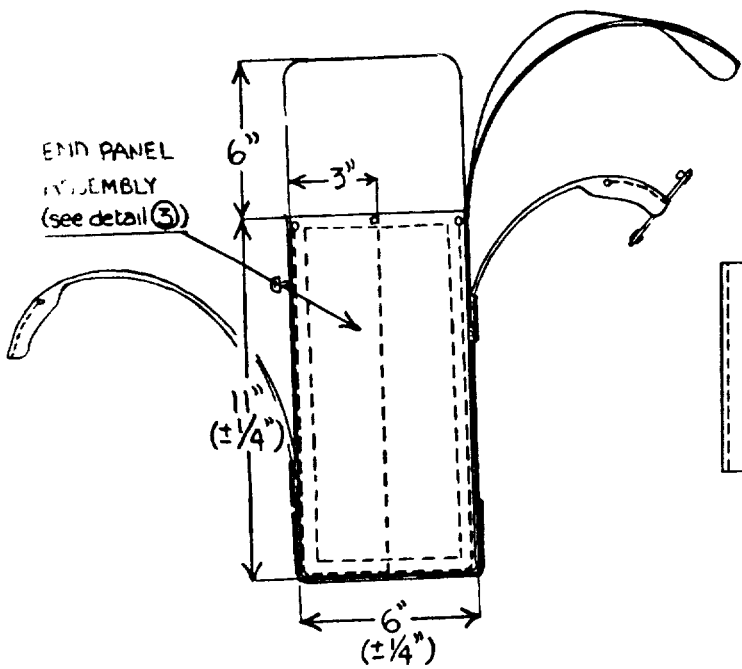


END

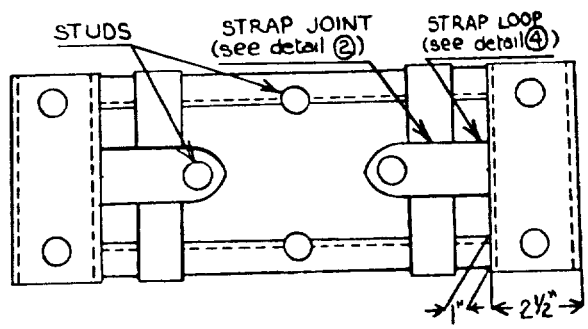


BOTTOM

FIGURE 1 - MONEY BAG


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

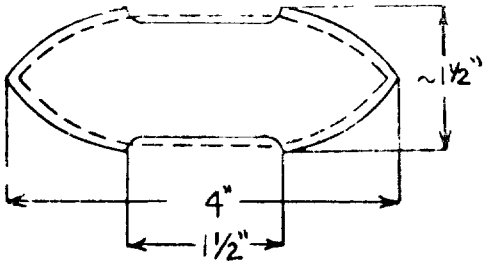


STRAP LOOP ①

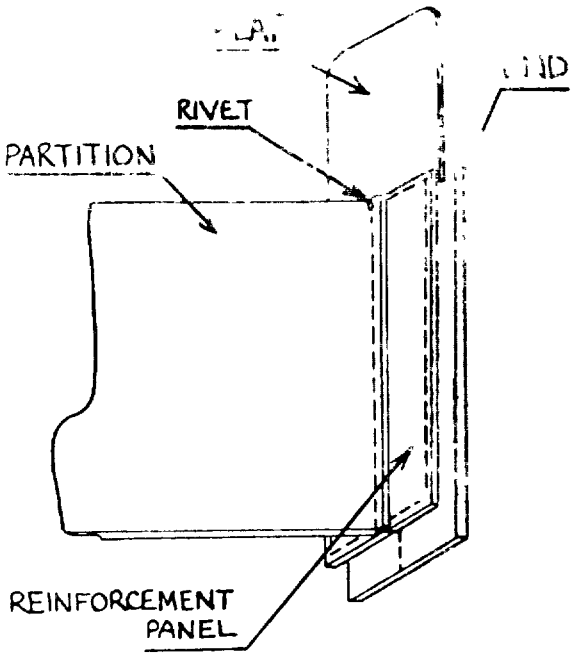

END PANEL ASSEMBLY ③

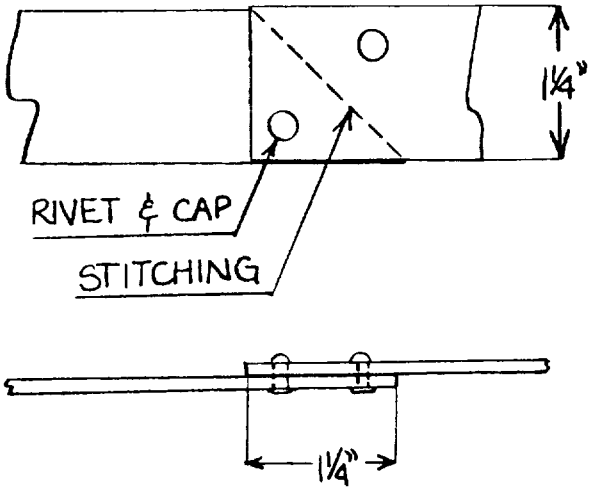

JOINING OF STRAPS AT BOTTOM OF BAG ②

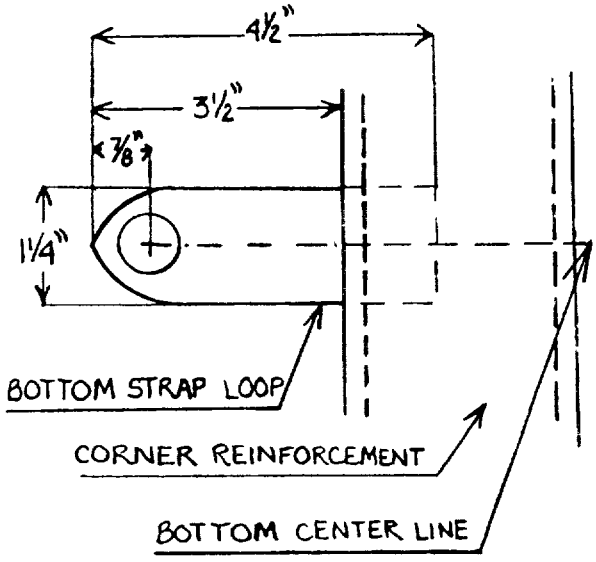

INSERTION OF BOTTOM LOOP ④

FIGURE 2 - DETAILS (See Figure 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

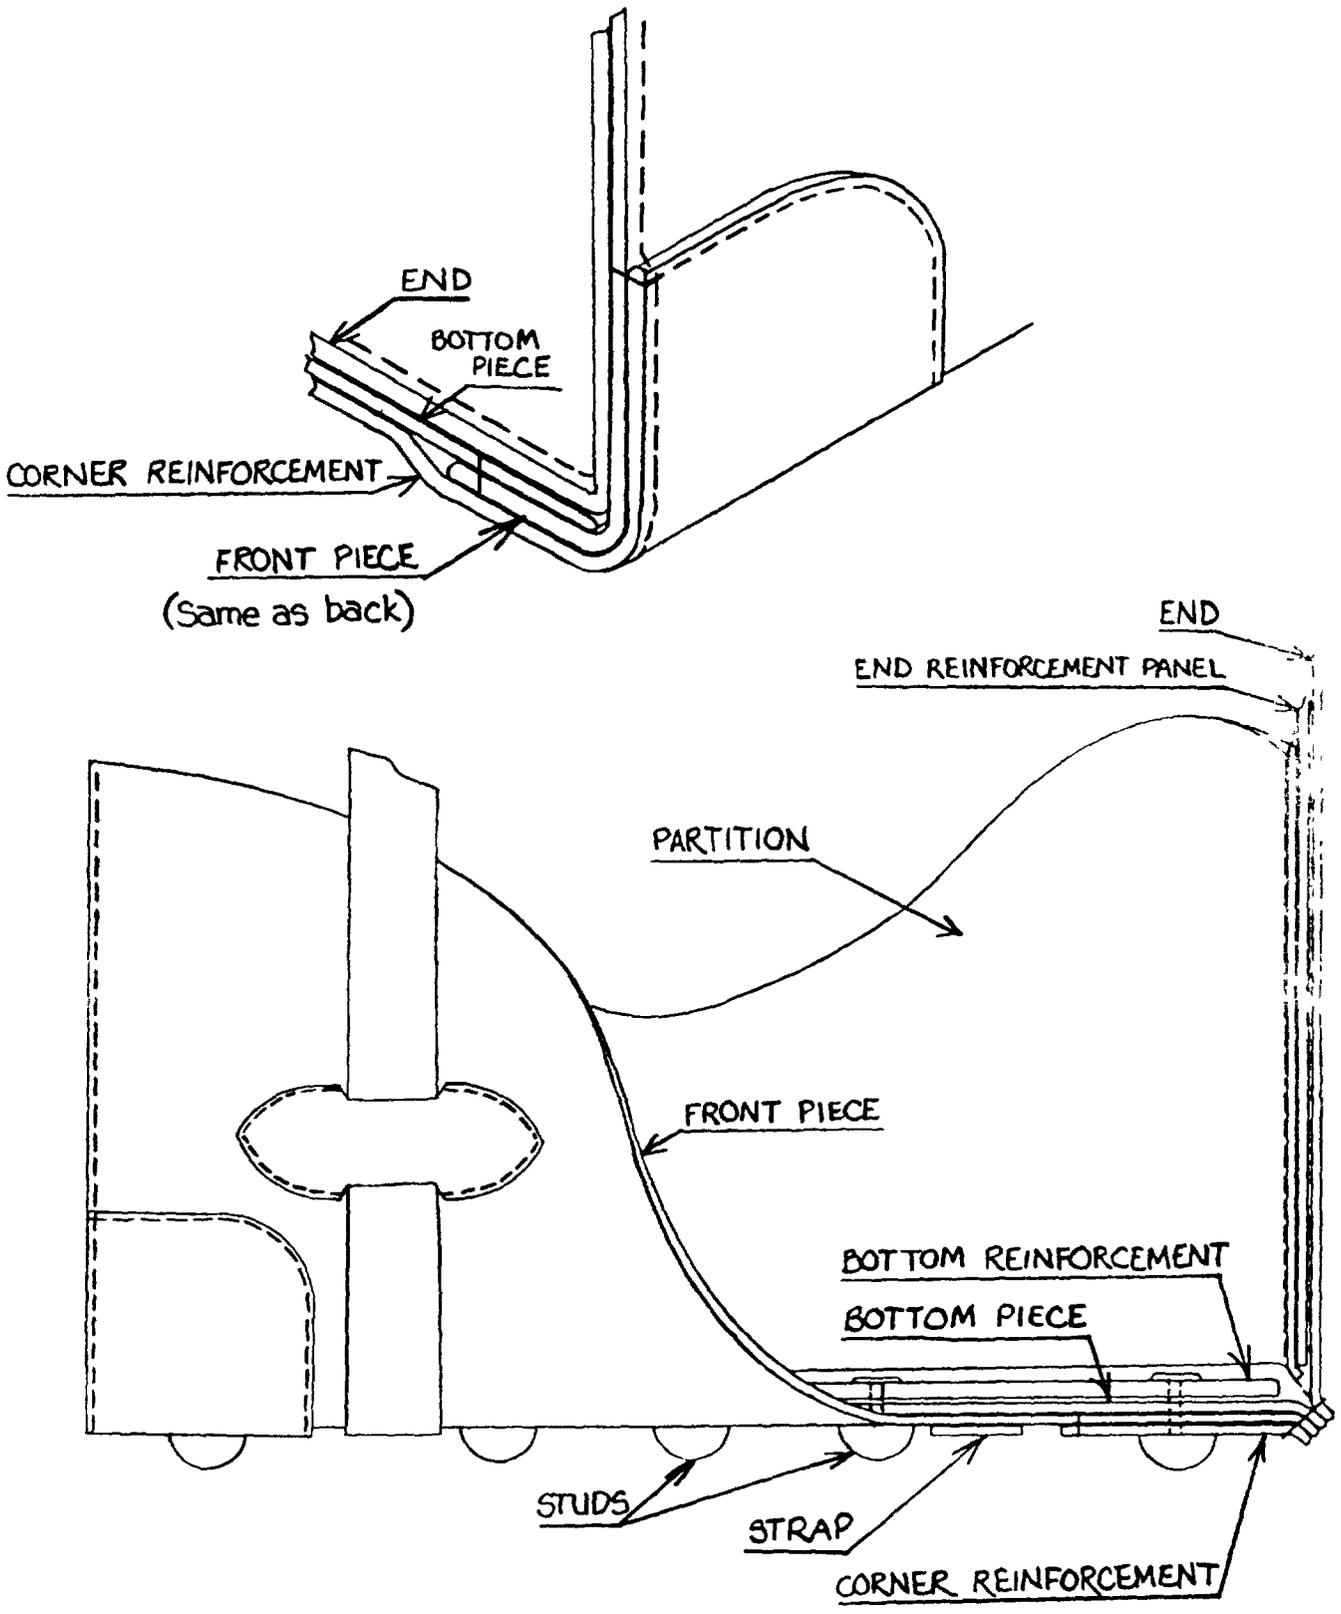


FIGURE 3- BOTTOM/END ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.8 Identification marking. Identification marking shall be in accordance with MIL-STD-130, in a contrasting color on the inside of the top flap. All lettering shall be at least 3/16 inch high. Markings shall contain the following information:

BAG, MONEY
Stock No.
Name of Contractor
Contract No.
US

3.9 Workmanship. The finished money bags shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.3.2 for compliance with design, construction, workmanship and dimensional requirements.

4.3. Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components and materials listed in Table I. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet the requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

TABLE I - TESTING OF COMPONENTS

Component and unit of product	Characteristic	Specification reference: Requirement paragraph	Specification reference: Test method	Requirement applicable to: Sample unit	Requirement applicable to: Lot average	No. of determinations per sample unit	Results reported as	Sample unit
Leather reinforcing (one side)	Mat'l Ident.	3.3.1.1	1/					
	Tannage	3.3.1.1	1/					
	Thickness	3.3.1.1	3/			1	nearest 1/2 ounce	
	Color	3.3.1.1	1/					
	Mildew-treatment	3.3.1.1	6711 2/ 1/					
Studs	Mat'l Ident.	3.3.5	1/					
	Diameter	3.3.5	3/			1	pass or fail	2 each
Hasp, staple lock	Mat'l Ident.	3.3.7	1/					
	Diameter of staple hole	3.3.7	3/			1	pass or fail	1 each
Reinforcing board	Mat'l Ident.	3.3.8	1/			1	nearest 0.005 inch	
	Thickness (pressboard only)	3.3.8	1/					

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirements.
2/ Refers to FED-STD-311.
3/ Any suitable measuring device or gauge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

4.3.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The sample unit shall be one finished money bag. The applicable inspection levels and acceptable quality levels shall be as specified in 4.3.2.3.

4.3.2.1 Visual examination. The finished money bags shall be examined for the defects listed below:

Examine	Defect	Classification Major	Minor
Leather	Color not as specified, not uniform		X
	Grain not as specified		X
	Hole, cut or torn area on exterior of bag	X	
	Grub marks, open or badly healed scratches, brands, boney, loose or pipey leather	X	
	Heavy fat wrinkles, stretchy leather	X	
	Grain side not finished as specified	X	
	Finish not as specified	X	
Thread	Shade does not match color of leather		X
	Not specifed size or type		X
Metal components	Lock not approved type	X	
	Finish not as specified		X
	Studs, rivets, caps and washers not as specified	X	
Construction and workmanship	Design not as specified	X	
	Any component not made from material specified	X	
	Any component missing or operation not performed as specified	X	
	Any leather component not attached with grain side out	X	
	Caps and rivets or studs not securely clinched and may become detached in use	X	
	Lock does not function properly	X	
	Caps and rivets or studs loose but securely attached		X
	Keys missing or do not operate lock	X	
	Rivets reversed	X	
	Sharp burrs or sliver on metal components	X	
	Not specified stitch type or seam type	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)	Gauge of stitching irregular		X
	Loose stitch tension causing loose seam	X	
	Lock stitches exposed on surface of leather		X
	Tight stitch tension rupturing leather	X	
	Any row of stitching omitted	X	
	Fewer than specified number of stitches per inch	X	
	More stitches per inch than specified		X
	Open seam (A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous stitches or runoffs occur)	X	
	Thread ends not trimmed or removed		X
	Any spot or stain on exterior of bag		X
	Any spot, stain, or foreign matter clearly noticeable·		
	that can be removed		X
	that can not be removed	X	
	Staple does not align properly with hasp	X	
Marking	Missing, incomplete, incorrect, not legible, improper location, not specified size		X

4.3.2.2 Examination for dimensions. The finished money bags shall be examined for defects in dimension. Any dimension that is not within tolerances specified in Figures 1 or 2 shall be classified as a defect.

4.3.2.3 Inspection levels and acceptable quality levels. The inspection levels (AQL's) expressed in defects per hundred units (DHU) shall be as follows.

	Inspection level	AQL's Major	Total
For defects applicable to 4.3.2.1	II	2.5	6.5
For defects applicable to 4.3.2.2	S-2		2.5
For defects applicable to 4.3.3	S-2		2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be sealed. Defects of closure shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection lot level and acceptable quality level shall be as specified in 4.3.2.3.

Examine	Defect
Marking (interior and exterior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing or not as specified.
	Any component damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers
Content	Number of items per container is more or less than specified.

5. PACKAGING

5.1 Preservation packaging. Packaging shall be level A or C (commercial) as specified (see 6.2).

5.1.1 Level A. Each money bag shall be closed and strap handles secured. The lock and two keys shall be securely tied to one of the strap handles. Each bag shall be completely wrapped in a suitable commercial kraft paper and secured with a gummed paper tape. As an alternate, each bag may be placed in a clear, open end polyethylene bag. The open end of the bag shall be folded over or may be closed by a suitable commercial practice. Each prepared bag shall be packaged in a snug-fitting fiberboard container conforming to Type CF, class domestic, grade 200, variety SW, style FOL of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.1.2 Level C (commercial). The money bag shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C (commercial) as specified.

5.2.1 Level A. Eight (8) packages, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to Type CF or SF, class weather-resistant, variety SW, grade V3c or V3s, style RSC of PPP-B-636. Each container shall be closed, waterproofed and reinforced in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Eight (8) packages, preserved as specified in 5.1, shall be packed in a snug-fitting, fiberboard shipping container, conforming to Type CF, class domestic variety SW, grade 200, style RSC of PPP-B-636. Each container shall be closed in accordance with Method II of the appendix of the box specification.

5.2.2 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, W5c or W6c fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (commercial). Packages, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Marking. In addition to any special marking required by the contractor or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The money bag covered by this specification is used for the transportation of money.

6.2 Ordering data. Procurement documents should specify the following

(a) Title, number and date of this specification.
(b) Whether first article sample is required (see 3.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 Acceptable brass lock components specified in 3.3.7 are style #450 swivel and plate from Presto Lock Company, 100 Outwater Lane, Garfield, NJ 07026.

Custodian:
Navy - NU

Review Activity
DLA - CT

User Activity
Navy - MC

Preparing activity:
Navy - NU

Project No. 8460-N063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

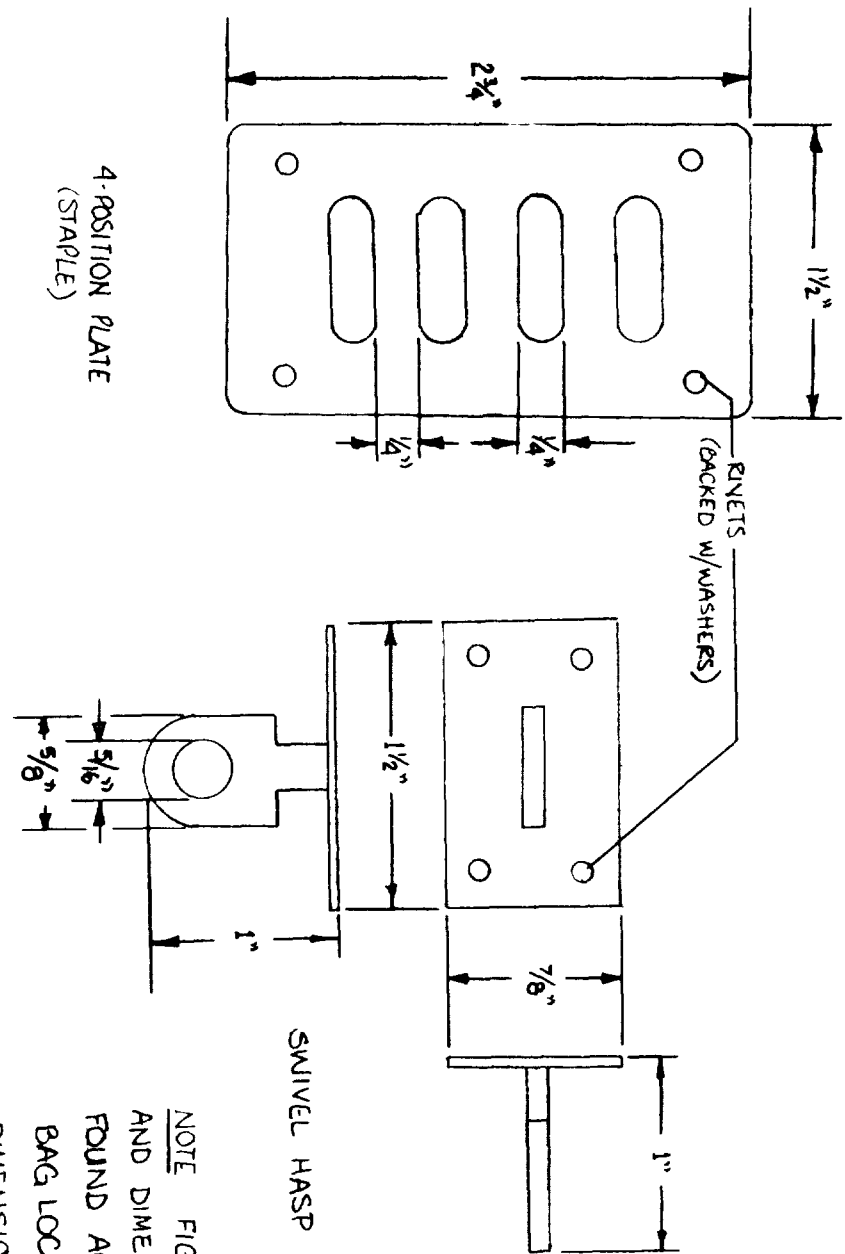


FIGURE 4 - BAG, MONEY

NOTE FIGURE 4 OFFERS DESIGN AND DIMENSIONAL CHARACTERISTICS FOUND ACCEPTABLE FOR MONEY BAG LOCK IN SOLID BRASS ALL DIMENSIONS ARE APPROXIMATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil Downloaded: 2026-10-28T11:35Z
Check the source to verify that this is the current version before use.