INCH-POUND

MIL-C-85049/11A
30 November 1990
SUPERSEDING
MIL-C-85049/11
16 January 1980
MS3437D
10 May 1982

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, CABLE SEALING, STRAIGHT, CATEGORY 1A (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

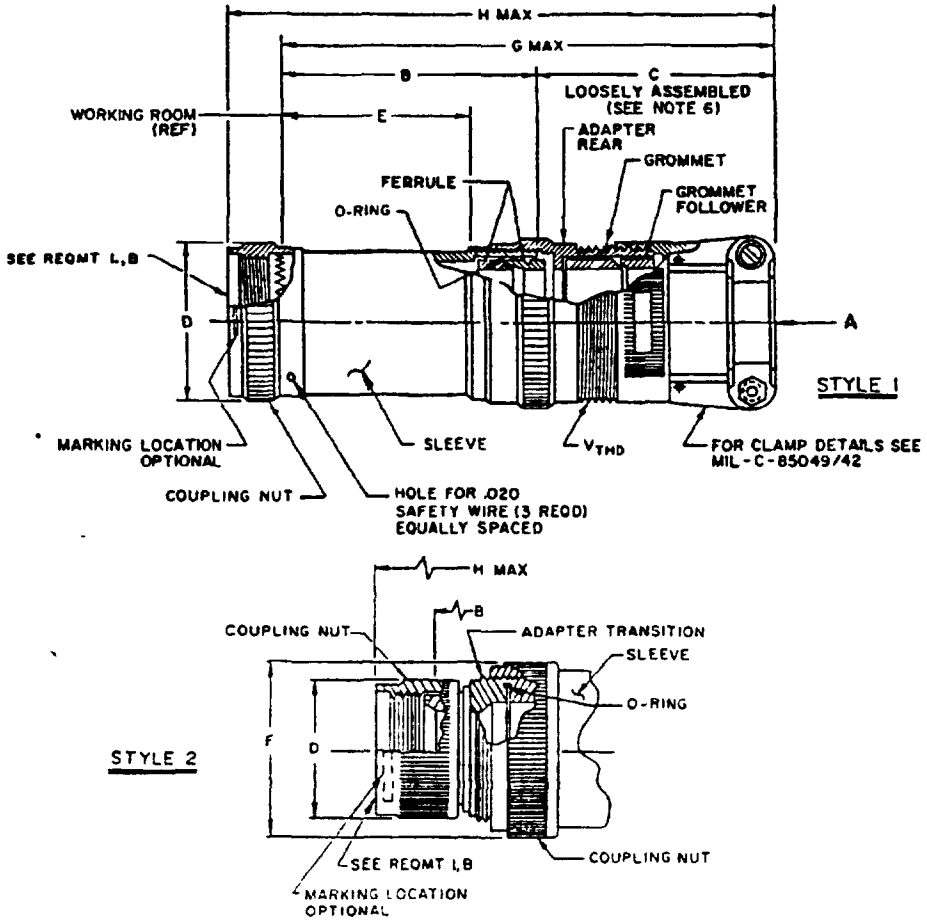


FIGURE 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
01	3				4	.125	.250	1	2.00	1.027	.669
02									3.00		
03					6	.250	.437	2	2.75	1.027	.669
04									3.75		
05		8	8S	8	4	.125	.250	1	2.00	1.027	.617
06									3.00		
07					6	.250	.437	2	2.75	1.027	.617
08									3.75		
09		10	10S, 10SL	10	4	.125	.312	1	2.00	1.027	.734
10									3.00		
11					6	.250	.437	2	2.75	1.027	.734
12									3.75		
13	7	12	12,12S	12	6	.250	.437	1	2.00	1.027	.858
14									3.00		
15					10	.350	.625	2	2.75	1.027	.858
16									3.75		
17	12	14	14,14S	14	10	.350	.575	1	2.00	1.027	.984
18									3.00		
19					12	.500	.750	2	2.75	1.059	.984
20									3.75		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
01	1.06	.625-24 UNEF	-	3.15	3.51
02	2.06			4.15	4.51
03	1.81	.750-20 UNEF	.858	3.90	4.26
04	2.81			4.90	5.26
05	1.06	.625-24 UNEF	-	3.15	3.51
06	2.06			4.15	4.51
07	1.81	.750-20 UNEF	.858	3.90	4.26
08	2.81			4.90	5.26
09	1.06	.625-24 UNEF	-	3.15	3.51
10	2.06			4.15	4.51
11	1.81	.750-20 UNEF	.858	3.90	4.26
12	2.81			4.90	5.26
13	1.06	.750-20 UNEF	-	3.15	3.51
14	2.06			4.15	4.51
15	1.67	1.000-20 UNEF	1.112	3.90	4.26
16	2.67			4.90	5.26
17	0.92	1.000-20 UNEF	-	3.15	3.51
18	1.92			4.15	4.51
19	1.67	1.1875-18 UNEF	1.218	3.93	4.29
20	2.67			4.93	5.29

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
21	19	16	16,16S	16	12	.500	.700	1	2.00	1.059	1.112
22									3.00		
23					16	.625	.937	2	2.75	1.156	1.112
24									3.75		
25	27	18	18	18	10	.350	.625	1	2.00	1.027	1.218
26									3.00		
27					12	.500	.750	1	2.00	1.059	1.218
28									3.00		
29					16	.625	.937	2	2.75	1.156	1.218
30									3.75		
31	37	20	20	20	10	.350	.625	1	3.00	1.027	1.345
32									4.00		
33					12	.500	.750	1	3.00	1.059	1.345
34									4.00		
35					16	.625	.937	2	3.75	1.156	1.345
36									4.75		
37					20	.875	1.250	2	3.75	1.375	1.345
38									4.75		
39		22	22	22	10	.350	.625	1	3.00	1.027	1.468
40									4.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
21	0.92	1.1875-18 UNEF	-	3.18	3.54
22	1.92			4.18	4.54
23	1.67	1.4375-18 UNEF	1.468	4.02	4.38
24	2.67			5.02	5.38
25	0.92	1.000-20 UNEF	-	3.15	3.51
26	1.92			4.15	4.51
27	0.92	1.1875-18 UNEF	-	3.18	3.54
28	1.92			4.18	4.54
29	1.67	1.4375-18 UNEF	1.468	4.02	4.38
30	2.67			5.02	5.38
31	1.92	1.000-20 UNEF	-	4.15	4.51
32	2.92			5.15	5.51
33	1.92	1.1875-18 UNEF	-	4.18	4.54
34	2.92			5.18	5.54
35	2.67	1.4375-18 UNEF	1.468	5.02	5.38
36	3.67			6.02	6.38
37	2.67	1.750-18 UNS	1.969	5.24	5.60
38	3.67			6.24	6.60
39	1.92	1.000-20 UNEF	-	4.15	4.51
40	2.92			5.15	5.51

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector: MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III	Clamp Size	A (see note 6) Wire Bundle Accommodation Range: Min	Max	Style	B ±.125	C Ref	D Dia Max
41					12	.500	.750	1	3.00	1.059	1.468
42									4.00		
43					16	.625	.937	1	3.00	1.156	1.468
44		22	22	22					4.00		
45					20	.875	1.250	2	3.75	1.375	1.468
46									4.75		
47					12	.500	.750	1	3.00	1.059	1.593
48									4.00		
49					16	.625	.812	1	3.00	1.156	1.593
50									4.00		
51		24	24	24	16	.625	.937	1	3.00	1.156	1.593
52									4.00		
53					20	.875	1.250	2	3.75	1.375	1.593
54									4.75		
55					12	.500	.750	1	3.00	1.059	1.969
56									4.00		
57					16	.625	.937	1	3.00	1.156	1.969
58			28						4.00		
59					20	.875	1.250	1	3.00	1.375	1.969
60									4.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
41	1.92	1.1875-18 UNEF	-	4.18	4.54
42	2.92			5.18	5.54
43	1.92	1.4375-18 UNEF	-	4.27	4.63
44	2.92			5.27	5.63
45	2.67	1.750-18 UNS	1.969	5.24	5.60
46	3.67			6.24	6.60
47	1.92	1.1875-18 UNEF	-	4.18	4.54
48	2.92			5.18	5.54
49	1.92	1.4375-18 UNEF	-	4.27	4.63
50	2.92			5.27	5.63
51	1.92	1.4375-18 UNEF	-	4.27	4.63
52	2.92			5.27	5.63
53	2.67	1.750-18 UNS	1.969	5.24	5.60
54	3.67			6.24	6.60
55	1.92	1.1875-18 UNEF	-	4.16	4.68
56	2.92			5.16	5.68
57	1.92	1.4375-18 UNEF	-	4.26	4.78
58	2.92			5.26	5.78
59	1.92	1.750-18 UNS	-	4.48	5.00
60	2.92			5.48	6.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector: MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III	Clamp Size	A (see note 6) Wire Bundle Accommodation Range Min	A (see note 6) Wire Bundle Accommodation Range Max	Style	B ±.125	C Ref	D Dia Max
61			28		24	1.000	1.375	1	3.00	1.500	1.969
62									4.00		
63			32		16	.625	.937	1	3.00	1.156	2.219
64									4.00		
65					20	.875	1.250	1	3.00	1.375	2.219
66									4.00		
67					24	1.000	1.375	1	3.00	1.500	2.219
68									4.00		
69					28	1.250	1.625	1	3.00	1.781	2.219
70									4.00		
71			36		20	.875	1.250	1	4.00	1.375	2.469
72									5.00		
73					24	1.000	1.375	1	4.00	1.500	2.469
74									5.00		
75					28	1.250	1.625	1	4.00	1.781	2.469
76									5.00		
77					32	1.437	1.875	2	4.88	1.830	2.469
78									5.88		
79			40		20	.875	1.250	1	4.00	1.375	2.719
80									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
61	1.92	2.000-18 UNS	-	4.60	5.12
62	2.92			5.60	6.12
63	1.92	1.4375-18 UNEF	-	4.26	4.78
64	2.92			5.26	5.78
65	1.92	1.750-18 UNS	-	4.48	5.00
66	2.92			5.48	6.00
67	1.92	2.000-18 UNS	-	4.60	5.12
68	2.92			5.60	6.12
69	1.92	2.250-16 UN	-	4.89	5.41
70	2.92			5.89	6.41
71	2.92	1.750-18 UNS	-	5.49	6.01
72	3.92			6.49	7.01
73	2.92	2.000-18 UNS	-	5.60	6.12
74	3.92			6.60	7.12
75	2.92	2.250-16 UN	-	5.89	6.41
76	3.92			6.89	7.41
77	3.80	2.500-16 UN	2.719	6.81	7.33
78	4.80			7.81	8.33
79	2.92	1.750-18 UNS	-	5.48	6.00
80	3.92			6.48	7.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
81			40		24	1.000	1.375	1	4.00	1.500	2.719
82									5.00		
83					28	1.250	1.625	1	4.00	1.781	2.719
84									5.00		
85					32	1.437	1.875	1	4.00	1.830	2.719
86									5.00		
87			44		20	.875	1.250	1	4.00	1.375	2.969
88									5.00		
89					24	1.000	1.375	1	4.00	1.500	2.969
90									5.00		
91					28	1.250	1.625	1	4.00	1.781	2.969
92									5.00		
93					32	1.437	1.875	1	4.00	1.830	2.969
94									5.00		
95			48		20	.875	1.250	1	4.00	1.375	3.219
96									5.00		
97					24	1.000	1.375	1	4.00	1.500	3.219
98									5.00		
99					28	1.250	1.625	1	4.00	1.781	3.219
100									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
81	2.92	2.000-18 UNS	-	5.60	6.12
82	3.92			6.60	7.12
83	2.92	2.250-16 UN	-	5.89	6.41
84	3.92			6.89	7.41
85	2.92	2.500-16 UN	-	5.93	6.45
86	3.92			6.93	7.45
87	2.92	1.750-18 UNS	-	5.48	6.00
88	3.92			6.48	7.00
89	2.92	2.000-18 UNS	-	5.60	6.12
90	3.92			6.60	7.12
91	2.92	2.250-16 UN	-	5.89	6.41
92	3.92			6.89	7.41
93	2.92	2.500-16 UN	-	5.93	6.45
94	3.92			6.93	7.45
95	2.92	1.750-18 UNS	-	5.48	6.00
96	3.92			6.48	7.00
97	2.92	2.000-18 UNS	-	5.60	6.12
98	3.92			6.60	7.12
99	2.92	2.250-16 UN	-	5.89	6.41
100	3.92			6.89	7.41

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
101			48		32	1.437	1.875	1	4.00	1.830	3.219
102									5.00		
103	61				12	.500	.750	1	3.00	1.059	1.653
104									4.00		
105					16	.625	.937	1	3.00	1.156	1.653
106									4.00		
107					20	.875	1.250	2	3.75	1.375	1.653
108									4.75		
109					24	1.000	1.375	2	3.75	1.500	1.653
110									4.75		
111	7	12	12,12S	12	10	.350	.500	1	2.00	1.027	.858
112	19	16	16,16S	16	6	.250	.437	1	2.00	1.027	1.112
113									3.00		
114	7	12	12,12S	12	4	.125	.312	1	2.00	1.027	.858
115									3.00		
116	12	14	14,14S	14	6	.250	.437	1	2.00	1.027	.984
117									3.00		
118	19	16	16,16S	16	10	.350	.625	1	2.00	1.027	1.112
119									3.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
101	2.92	2.500-16 UN	-	5.93	6.45
102	3.92			6.93	7.45
103	1.92	1.1875-18 UNEF	-	4.18	4.54
104	2.92			5.18	5.54
105	1.92	1.4375-18 UNEF	-	4.27	4.63
106	2.92			5.27	5.63
107	2.67	1.750-18 UNS	1.969	5.24	5.60
108	3.67			6.24	6.60
109	2.67	2.000-18 UNS	1.969	5.37	5.73
110	3.67			6.37	6.73
111	1.00	1.000-20 UNEF	-	3.15	3.51
112	1.00	.750-20 UNEF	-	3.15	3.51
113	2.00			4.15	4.51
114	1.00	.625-24 UNEF	-	3.15	3.51
115	2.00			4.15	4.51
116	1.00	.750-20 UNEF	-	3.15	3.51
117	2.00			4.15	4.51
118	0.92	1.000-20 UNEF	-	3.15	3.51
119	1.92			4.15	4.51

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
120	27	18	18	18	4	.125	.312	1	2.00	1.027	1.218
121									3.00		
122					6	.250	.437	1	2.00	1.027	1.218
123									3.00		
124	37	20	20	20	6	.250	.437	1	3.00	1.027	1.345
125									4.00		
126		22	22	22	4	.125	.312	1	3.00	1.027	1.468
127									4.00		
128					6	.250	.437	1	3.00	1.027	1.468
129									4.00		
130		24	24	24	10	.350	.625	1	3.00	1.027	1.593
131									4.00		
132			36		12	.500	.750	1	4.00	1.059	2.469
133									5.00		
134			40		12	.500	.750	1	4.00	1.059	2.719
135									5.00		
136		10	10S, 10SL	10	6	.250	.375	1	2.00	1.027	.734
137									3.00		
138	7	12	12,12S	12	10	.350	.500	1	2.00	1.027	.858
139									3.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
120	0.92	.625-24 UNEF	-	3.15	3.51
121	1.92			4.15	4.51
122	0.92	.750-20 UNEF	-	3.15	3.51
123	1.92			4.15	4.51
124	1.92	.750-20 UNEF	-	4.15	4.51
125	2.92			5.15	5.51
126	1.92	.625-24 UNEF	-	4.15	4.51
127	2.92			5.15	5.51
128	1.92	.750-20 UNEF	-	4.15	4.51
129	2.92			5.15	5.51
130	1.92	1.000-20 UNEF	-	4.15	4.51
131	2.92			5.15	5.51
132	2.92	1.1875-18 UNEF	-	5.32	5.68
133	3.92			6.32	6.68
134	2.92	1.1875-18 UNEF	-	5.16	5.68
135	3.92			6.16	6.68
136	1.06	.750-20 UNEF	-	3.15	3.51
137	2.06			4.15	4.51
138	1.06	1.000-20 UNEF	-	3.15	3.51
139	2.06			4.15	4.51

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
140	37	20	20	20	18	.625	.904	1	3.00	1.156	1.345
141									4.00		
142		22	22	22	20	.875	1.029	1	3.00	1.375	1.468
143									4.00		
144		24	24	24	20	.875	1.144	1	3.00	1.375	1.593
145									4.00		
146			36		32	1.437	1.840	1	4.00	1.830	2.469
147									5.00		
148					18	.625	.937	1	4.00	1.156	2.469
149									5.00		
150	12	14	14,14S	14	4	.125	.312	1	2.00	1.027	.984
151									3.00		
152	19	16	16,16S	16	4	.125	.312	1	2.00	1.027	1.112
153									3.00		
154			44		16	.625	.937	1	4.00	1.156	2.969
155									5.00		
156			40		16	.625	.937	1	4.00	1.156	2.719
157									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
140	1.92	1.4375-18 UNEF	-	4.27	4.63
141	2.92			5.27	5.63
142	1.92	1.750-18 UNS	-	4.49	4.85
143	2.92			5.49	5.85
144	1.92	1.750-18 UNS	-	4.49	4.85
145	2.92			5.49	5.85
146	2.92	2.500-16 UN	-	5.93	6.45
147	3.92			6.93	7.45
148	2.92	1.4375-18 UNEF	-	5.26	5.78
149	3.92			6.26	6.78
150	0.92	.625-24 UNEF	-	3.15	3.51
151	1.92			4.15	4.51
152	0.92	.625-24 UNEF	-	3.15	3.51
153	1.92			4.15	4.51
154	2.92	1.4375-18 UNEF	-	5.26	5.78
155	3.92			6.26	6.78
156	2.92	1.4375-18 UNEF	-	5.26	5.78
157	3.92			6.26	6.78

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.005	0.13	1.500	38.10	4.150	105.41	5.680	144.27
0.020	0.51	1.593	40.46	4.160	105.66	5.730	145.54
0.125	3.18	1.625	41.28	4.180	106.17	5.780	146.81
0.250	6.35	1.653	41.99	4.260	108.20	5.850	148.59
0.312	7.92	1.670	42.42	4.270	108.45	5.890	149.60
0.350	8.80	1.750	44.45	4.380	111.25	5.930	150.62
0.375	9.53	1.781	45.24	4.480	113.79	6.000	152.40
0.437	11.10	1.810	45.97	4.490	114.04	6.010	152.65
0.500	12.70	1.830	46.48	4.510	114.55	6.020	152.90
0.617	15.67	1.875	47.63	4.540	115.31	6.120	155.44
0.625	15.88	1.920	48.77	4.600	116.84	6.160	156.46
0.669	16.99	1.969	50.01	4.630	117.60	6.240	158.49
0.700	17.78	2.000	50.80	4.680	118.87	6.260	159.00
0.734	18.64	2.060	52.32	4.700	119.38	6.320	160.52
0.750	19.05	2.219	56.36	4.850	123.19	6.370	161.79
0.858	21.79	2.250	57.15	4.890	124.20	6.380	162.05
0.875	22.22	2.469	62.71	4.900	124.46	6.390	162.30
0.904	22.96	2.500	63.50	5.000	127.00	6.410	162.81
0.920	23.37	2.670	67.82	5.020	127.50	6.450	163.83
0.937	23.80	2.719	69.06	5.120	130.04	6.480	164.59
0.984	24.99	2.750	69.85	5.150	130.81	6.490	164.84
1.000	25.40	2.810	71.37	5.160	131.06	6.660	169.16
1.027	26.09	2.920	74.17	5.180	131.57	6.680	169.67
1.029	26.14	2.969	75.41	5.240	133.09	6.730	170.94
1.059	26.90	3.000	76.20	5.260	133.60	6.780	172.21
1.060	26.92	3.150	80.01	5.270	133.85	6.810	172.97
1.112	28.24	3.180	80.77	5.290	134.36	6.890	175.00
1.144	29.06	3.219	81.76	5.320	135.12	6.930	176.02
1.156	29.36	3.510	89.15	5.370	136.39	7.000	177.80
1.1875	30.16	3.540	89.91	5.380	136.65	7.010	178.05
1.218	30.94	3.670	93.21	5.410	137.41	7.120	180.85
1.250	31.75	3.750	95.25	5.480	139.19	7.330	186.18
1.345	34.16	3.800	96.52	5.490	139.44	7.390	187.70
1.375	34.93	3.900	99.06	5.510	139.95	7.410	188.21
1.437	36.50	3.920	99.56	5.540	140.71	7.450	189.23
1.4375	36.51	4.000	101.60	5.600	142.24	7.810	198.37
1.468	37.29	4.020	102.10	5.630	143.00	8.330	211.58

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction:

   a. Dimensions and configuration: See figure 1 and table I.

   b. Interface dimensions shall conform to MIL-C-85049 figure 4.

   c. Figure 1 consists of a coupling nut and follower. The coupling nut shall be captivated to and free to rotate on the follower.

2. Material and finish:

   a. Accessory components shall be as shown in table II.

   b. Grommet and O-Ring - Grommet and o-ring elastomer material shall be in accordance with MIL-C-85049.

   c. Clamp assembly screws - Corrosion resistant steel in accordance with MIL-C-85049, passivated per QQ-P-35.

3. Qualification: See MIL-C-85049, category 1A. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.


4. Applications:

   a. These accessories are for environmental applications.


   b. Style 2 applies when the cable diameter exceeds the "E" diameter of the interface dimensions defined in MIL-C-85049 figure 4.

   c. For assembly instructions see figure 2.

5. Part Number: See example below:

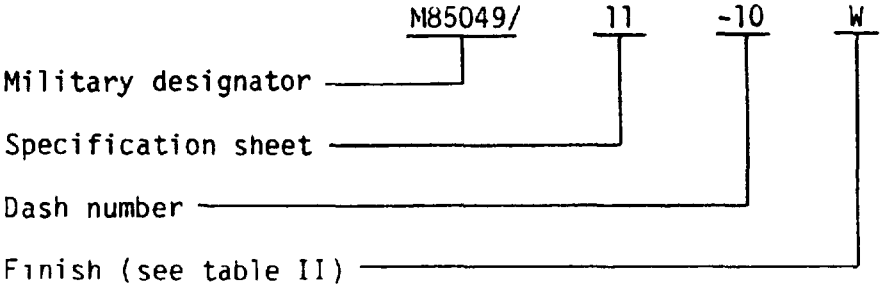


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

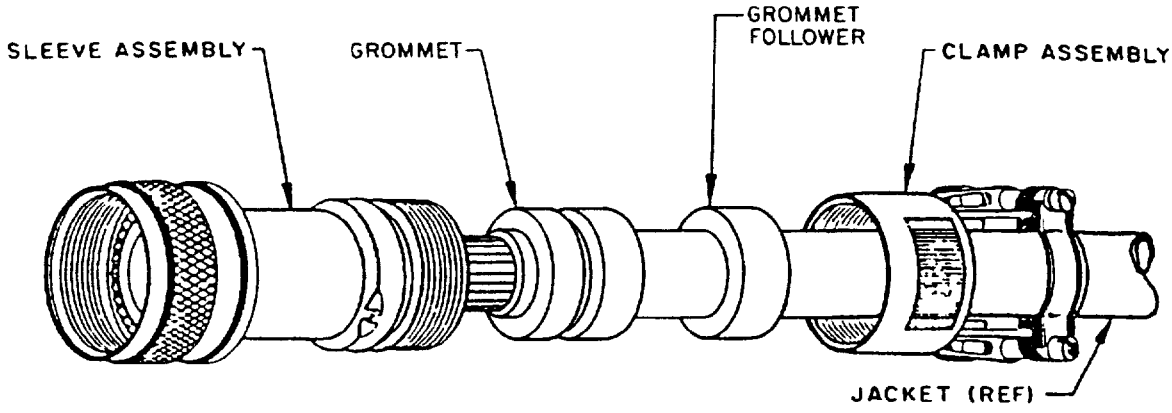

STYLE 1

ENVIRONMENTAL

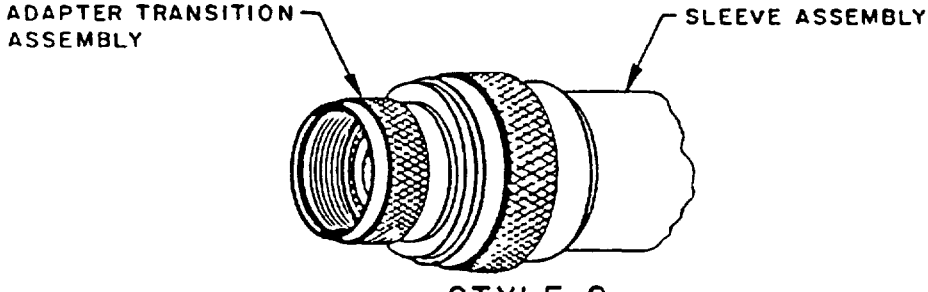

STYLE 2

(SEE APPLICATION REQUIREMENT 4,B)

FIGURE 2. Assembly instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

6. Supersession data:

MS3437B * * M85049/11 - * *

Dash Number

Finish

Old	New
A	W
C	W
N	N
D	B
S	S

TABLE II. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	1/ N, 2/ W
Body	Corrosion resistant steel in accordance with MIL-C-85049	B, S

1/ Not for Navy use. Restricted to Air Force Space applications only.
2/ W finish is not for use in space application.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents shall be based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Unless otherwise specified, tolerance is ±.005.
4. Dimensions apply after plating.
5. Loosely assembled is defined as the MIL-C-85049/42 clamp tightened to the MIL-C-85049/11 connector accessory body a minimum of two full thread lengths.
6. "Wire bundle accommodation range" dimension is defined as the envelope area for the wire bundle. This dimension is not meant to define the clamp hardware limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.