MIL-P-60649B(MU)
30 September 1969
SUPERSEDING
MIL-P-60649A(MU)
17 June 1969

MILITARY SPECIFICATION

PERISCOPES, TANK: XM44E1 AND XM44E2 WITH ASSOCIATED EQUIPMENT

1. SCOPE

1.1 Scope. - This specification covers the performance requirements, related quality assurance provisions and packaging data for the assemblies listed in 1.2.

1.2 Assemblies covered.

1.2.1 Panel Assembly 10549788. - The panel assembly provides for transmitting and controlling electrical energy from a 24 volt battery to the high voltage oscillator, reticle projector lamp, wiper motor, and panel lamps. Provision is made to transmit current from an alternate 6 volt battery to the high voltage oscillator and reticle projector lamp.

1.2.2 Periscope Mount 10513360. - This assembly positions and secures the periscope. A ballistic guard and manually operable shield provide protection against blast damage. The mount incorporates a wiper assembly with a built-in motor to drive the wiper blade across the entrance window of the periscope. A liquid is directed to this window through a tube which is part of the wiper assembly.

1.2.3 Tank Periscope XM44E1 & XM44E2. - These periscopes provide a unity power viewing system and a nine power passive (low light level) sighting system. The periscope is equipped with a reticle projector which projects the image of a reticle pattern into the sighting system.

1.2.4 Linkage Assembly 8287301. - This assembly serves as a link between the periscope input coupling and the weapon. The linkage provides for elevation of the line of sight coaxially with the weapon.

1.2.5 Plate Assembly 10513331. - This plate provides the observer with protection against blast damage. An adjustable headrest is a part of this assembly.

1.2.6 Washer, Pump and Reservoir Assembly 8589797. - This washers consisting of a pump and reservoir, provides for storing and pumping a liquid through the discharge tube on the wiper assembly.

1.2.7 Boresight Aid Assembly 10516830. - This assembly provides for reducing the entrance aperture of the periscope when boresighting in daylight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

1.2.8 Battery Mounting Bracket 8689807. - This mounting bracket provides for positioning a 6 volt battery.

1.2.9 Battery (6 volt). - This battery provides emergency power for the oscillator and projected reticle.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATION S

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-I-55536	Image Intensifier tube Assembly, 25MM

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-150	Photographic Lenses
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods

DRAWINGS

US Army, Frankford Arsenal

F10542200	Periscope, Tank, XM44E1
F10542200-2	Periscope, Tank, XM44E2
F8287301	Linkage Assembly 8287301
F8565566	Pressure Tester - Two Station
F10549788	Panel Assembly 10549788
D8589897	Bracket, Battery Mounting, 8689807
F8589797	Washer, Pump and Reservoir Assembly, 8589797
F10513331	Plate Assembly 10513331

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

DRAWINGS (Continued)

C10516830	Boresight Aid Assembly 10516830
C8589919	Battery

PACKAGING DATA SHEETS

5801076	Packaging of Periscope, Tank: XM44El w/Equipment
10553230	Packaging of Periscope, Tank: XM44EZ w/Equipment

(Copies of specifications, standards, drawings and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements index. - Wherever applicable, the assemblies tabulated in Table 1 shall be capable of meeting the requirements listed therein.

TABLE I

ASSEMBLY	APPLICABLE REQUIREMENTS
Panel Assembly 10549788 periscope Mount 10513360	3.2 to 3.10.3 inclusive 3.2 to 3.9 and 3.11 to 3.11.4 inclusive
Tank Periscope XM44E1 and XM44E2	3.2 to 3.9 and 3.12 to 3.12.6 inclusive
Linkage Assembly 8287301	3.2 to 3.8 and 3.12 to 3.13.1.2 inclusive
Plate Assembly 10513331	3.2 to 3.6 inclusive and 3.8
Washer, Pump and Reservoir Assembly 8589797	3.2 to 3.6 inclusive and 3.8
Boresight Aid Assembly 10516830	3.2 to 3.6 inclusive and 3.8
Battery Mounting Bracket 8589807	3.2 to 3.6 inclusive and 3.8

3.2 Fabrication. - The assemblies covered in this specification shall be manufactured in accordance with the applicable drawings listed in 2.1.

3.3 Temperature conditions. - Except as specified in 3.7, 3.11.3, 3.12.3, 3.13.3, and 3.14.1.1, the following requirements shall be met at a temperature between 60° and 90° Fahrenheit (F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.4 General specification. - The requirements of MIL-F-13926 listed below shall be met wherever applicable.

a. Order of precedence.
b. Dimensions and tolerances.
c. Inorganic protective surface finishes.
d. Part identification and marking.
e. Soldering electrical connections.

3.5 Workmanship. - The workmanship requirements of MIL-F-13926 shall be met. The exterior protective surface finishes shall be free of voids which may affect their protective qualities or appearance. Optical surfaces shall be free of scratches and blemishes which may affect their optical qualities or appearance.

3.6 Extreme storage temperatures. - There shall be no evidence of physical failure such as glass breakage and bonding or casting failure due to storage at temperatures ranging from -80°F to +160°F.

3.7 Orientation. - Wherever specified, the conditions listed below shall apply:

a. The periscope assembled to Mount Assembly 10513500.
b. The shield assembly positioned with respect to Mount Assembly 10513500.
c. The shield in the raised position.
d. Cable Assembly 8589783 assembled to Connector 8635241.
e. The connectors on Cable Assembly 8589783 for the wiper, oscillator, and reticle projector assembled to their respective connectors.
f. A potential of 24 ± 6.0 volts direct current (vdc) applied across the vehicle power contact pins (Part No. MS27148-2) and Terminal 7056709; the pin positive with respect to the terminal.

3.8 Vibration. - This requirement shall be met with:

a. All the conditions listed in 3.7.
b. A line of sight established prior to vibration.
c. The periscope switch in the ON position.
d. The reticle light intensity, panel light intensity, and wiper knobs at the limit of their clockwise rotation.
e. The linkage assembly, plate assembly, battery mounting bracket, boresight aid assembly, and the washer, pump, and reservoir assembly vibrated as separate assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

The periscope and assemblies shall be vibrated successively along three (3) mutually perpendicular axes. Vibration shall be a simple harmonic motion, the frequency varying either linearly or logarithmically from 5 to 55 to 5 CPS in five minute cycles for a total of 15 minutes along each of the axes. The amplitude of vibration shall be maintained constant at 1/64 inch (1/32 inch total excursion). The vibration test shall not cause:

f. Failure of the wiper blade to sweep across the window in a constant reciprocating motion during vibration.
g. Failure or flicker of light emission from the panel lamps, reticle projector lamp, and image tube during vibration.
h. Evidence of physical failure during and subsequent to vibration.
i. The line of sight reading established in 3.8b to deviate more than 0.30 mil subsequent to vibration.

3.9 Dielectric strength. - This requirement shall be met with the panel assembly disconnected from the periscope, the image tube, and reticle projector lamp removed from their receptacles. Insulation resistance between ungrounded circuits, isolated circuits, and castings shall be not less than 10 megohms at a potential of 100 Vdc.

3.10 Panel Assembly 10549788.

3.10.1 Operating electrical service conditions.

3.10.1.1 Primary power source. - Except as otherwise specified, requirements of 3.10.2 shall be met when the panel assembly is energized with from 18 vdc to 30 vdc. This voltage shall be from an external power source and shall be applied in positive polarity to J1-J with respect to J1-K (symbol designations shown on Drawing F10542023).

3.10.1.2 Emergency primary power source. - The requirements of 3.10.2, which are applicable to the emergency primary power source shall be met when the panel assembly is energized with 6.0 vdc. This voltage shall be from an external direct current power source and shall be applied in positive polarity to J1-E with respect to J1-11.

3.10.2 Operational Performance. - Unless otherwise specified, requirements herein shall be met when the panel assembly is energized in accordance with 3.10.1.1 and 3.10.1.2.

3.10.2.1 Rheostat performance. - The panel lamps (RI), reticle projector (R2), and wiper (R3) rheostats, when rotated from an extreme clockwise (cw) to extreme counterclockwise (ccw) position, shall exhibit no spasmodic performance throughout their range of rotation.

3.10.2.2 Rheostat R1. - Rheostat R1 shall control total current as specified in Table II, for each respective rheostat arm position and applied primary power source voltage. Switch S1 shall be in the "OFF" position when meeting this requirement. Primary power shall be applied as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

+30 FDC to J1-11
GRD to J1-J

TABLE II - R1 PERFORMANCE

Rheostat	Primary Power	Rheostat Wiper Arm Position	Circuit Load DC AmPa.
R1	30 Vdc	extreme cw - min. res.	-28 ± .04
R1	30 Vdc	extreme ccw - max. res.	.185 ± .01
R1	30 Vdc	OFF	.12 ± .01

3.10.2.3 Rheostat R2. - The rheostat R2 output circuit shall exhibit the voltage specified in Table III for each respective circuit under the specified dc load conditions, rheostat arm positions, and applied primary power. Switch S1 shall be in the "Emergency" position.

TABLE III - R2 PERFORMANCE

Rheostat	Primary Power	Rheostat Wiper ARm Position	Circuit Load DC Amps.	Circuit Output DC volts
R2	6 Vdc	extreme cw - min. res.	.700	5.6 + .4
		extreme ccw - max. res.		1.7 + .2
		extreme OFF position	zero	zero

3.10.2.4 Rheostat R3. - When the panel assembly is energized from a primary power source of +30 vdc, the output circuits of R3 (existing between chassis ground and terminal J1-A and J1-B) shall exhibit the voltages specified in Table IV at the specified circuit load conditions and rheostat wiper arm pos tions.

TABLE IV - R3 PERFORMANCE

Rheostat Wiper Arm Position	Circuit Load DC Amps.	Output Circuit Voltage J1-A to Grd	J1-B to Grd
Extreme cw - min. res.	1.00	"29.0 Vdc min.	29.0 Vdc min.
ccw to max. res.	.60 max.	29.0 Vdc min.	15.0 Vdc min.
extreme ccw - OFF position	zero	zero	zero min.

1/ Switch S1 shall be in the "center-off" position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.10.2.5 Output of voltage regulated supplies. - The battery charging reticle projector and high voltage oscillator supplies shall exhibit the voltage regulation specified in Table V. This regulation shall exist over the indicated primary power source voltage and under the specified dc load conditions. The reticle projector and high voltage oscillator outputs in Table V shall only be available with Switch S1 in the "ON" position. with S1 in the "OFF" position, terminals J1-K and J1-L shall exhibit zero voltage relative to all ground terminals.

TABLE V - REGULATED OUTPUTS

Regulated Supply	S1 Position	Primary Power	Output Load	Required Output DC
Battery Charging	Off (Center)	30 VDc	732 OHMS ± 1%	7.0 ± 0.5 volts
Battery Charging	Off (Center)	18 VDC	Zero OHMS (Short Circuit)	220-320 M.A.
Battery Charging	On (Veh.Pwr)	18 VDC	Zero OHMS (Short Circuit)	220-320 M.A.
Reticle Projector[2])	On (Veh. Pwr.)	30VDC/18VDC	732 OHMS ± 1%	7.3 ± 0.5 volts
Reticle Projector[2])	On (Veh. Pwr.)	18VDC/30VDC	800 M.A.	Less than .30 volt change
High Volt. Oscill.	On (Veh. Pwr.)	18-30 VDC	10-20 M.A.	5.9 ± 0.1 volts
Reticle Projector[2])	On (Emer. Pwr.)	6.2 vDC	0-600 M.A.	5.8 ± 0.4 volts
High Volt. Oscill.	On (Emer. Pwr.)	6.2 VDC	10-20 M.A.	5.9 ± 0.1 volts

2/ These requirements shall be met with R2 in the clockwise position (min. resistance).

3.10.3 Operability of controls. - The persicope switch, reticle light intensity, panel light intensity, and wiper knobs shall be manually operable. This requirement shall also be met while the panel assembly is thermally stabilized at -65° and +150°F.

3.11 Periscope Mount 10513360. - The Periscope Mount 10513360, consisting of Mount Assembly 10513500 and the shield assembly (shown on Drawing F10513360), is hereinafter referred to as "mount".

3.11.1 Periscope mounting repeatability. - An original line of sight through the periscope shall not deviate more than 0.30 mil due to repeated assembling of the periscope to Mount Assembly 10513500.

3.11.2 Periscope insertion and removal. - This requirement shall be met with the mount positioned in accordance with 3.7b and 3.7c. The mount shall permit insertion and removal of the periscope without restriction,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

This requirement shall be met with the wiper blade raised to prevent damage to the blade.

3.11.2 Operability of controls and wiper mechanism. - The requirements of 3.11.3.1 t.o 3.11.3.4.2 shall be met:

a. At the temperatures specified in 3.3 and while the mount is thermally stabilized at -65° and +150°F, unless otherwise specified.
b. With the mount positioned in accordance with 3.7B.
c. With Datum Plane "A" (shown on Drawing F105I336O) horizontal within 2.0 degrees of arc.

2.11.3.1 Periscope locking lever. - Lever Assembly 8589900 shall be manually operable through the range required to secure and permit removal of the periscope body assembly. This requirement shall be met at the temperatures specified in 3.3.

3.11.3.2 Shield actuating handle. - Handle 10542148 shall be manually operable through the range required to raise and lower the shield from the fully closed to the fully open positions.

3.11.3.3 Handle locking latch. - When Latch 10542138 is released while the shield is being raised, the handle shall lock the shield in the fully open position. When the latch is released while the shield is being lowered, the handle shall lock the shield in the fully closed position.

3.11.3.4 Wiper mechanism. - The requirements of 3.11.3.4.1 and 3.11.3.4.2 shall be met with:

a. The conditions of 3.7b, 3.7c and 3.7f.
b. The connector on Cable Assembly 8589783 for the wiper assembled to its respective connector.
c. The periscope head assembly assembled to Mount Assembly 10513500.
d. The entrance window on the head assembly frost-free.

3.11.3.4.1 Motor and linkage. - The wiper blade shall sweep across the window of the periscope in a constant reciprocating motion when the wiper knob is at the limit of clockwise rotation. Clockwise rotation of the knob shall speed: counterclockwise rotation shall slow the motion of the wiper blade.

3.11.3.4.2 Limit switch. - Rotation of the wiper knob to its counterclockwise limit shall cause the wiper blade to return to, and stop at, the "0" position shown on Drawing F10513360.

3.11.3.4.3 Circuit breaker. - The conditions specified in 3.7c, 3.7d, 3.7f and 3.11.3.4b shall apply for this requirement. With Shaft Assembly 10549773 secured to prevent rotation and wiper knob at the limit of clockwise rotation, the motor shall be de-activated by the circuit breaker within 15 seconds, maximum. On release of the shaft the motor must again drive

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the current version before use.

the wiper. Repeat with wiper knob at the limit of counterclockwiserotation, but not in the "OFF" position.

3.11.4 Sealing. - This requirement shall be met with the head assembly assembled to Mount Assembly 10513500, Datum Plane "A" horizontal within 2.0 degrees of arc, and the conditions of 3.7b and 3.7c. Gasket 10513302 shall be capable of preventing water penetration below the contact surfaces when exposed to prolonged rainfall.

3.12 Tank Periscope XM44E1 and XM44E2.

3.12.1 Optical characteristics.

3.12.1.1 With image tube removed. - Unless otherwise specified the requirements of 3.12.1.2 to 3.12.1.6.2 inclusive shall be met with:

a. The image tube removed from the periscope (not applicable to 3.12.1.4).
b. The conditions of 3.7a.
c. The clear filter positioned in the optical train.

3.12.1.2 Contrast transfer. - The contrast transfer for vertical lines and for horizontal lines shall be not less than the values specified in 3.12.1.2.1 and 3.12.1.2.2.

3.12.1.2.1 Objective system. - The following values (for the axis specified) shall be met with 2870° ± 100° Kelvin (K) radiance, modulated at the spatial frequency (angular spacing) indicated, incident to the entrance window and the contrast values obtained at the objective system focal plane. On axis is defined as the geometric axis of Sleeve 10542226. Off axis is defined as displacement, conforming to the value specified, from on axis.

ANGUMR SPACING (in line pairs/milliradian)	CONTRAST TRANSFER Vertical lines	Horizontal lines
a. On axis.		
0.58	.95	.95
1.732	.91	.91
3.70	.84	.84
b. Off axis 0.3 inch.		
0.58	.93	.93
1.732	.88	.88
3.70	.78	.78

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.1.2.2 Eyepiece and erecting system. - The following values (for the axis specified) shall be met with 2870° ± 100° Kelvin (K) radiance, modulated at the spacial frequency (angular spacing) indicated, incident to the exit pupil of the eyepiece and erecting system and the contrast transfer values obtained at the focal plane.

ANGULAR SPACING (in line pairs/milliradian)	CONTRAST TRANSFER Vertical lines	Horizontal lines
a. On axis.		
0.58	.95	1.95
1.732	.92	.92
3.70	.81	.81
b. Off axis 0.3 inch.		
0.58	.95	.95
1.732	.92	.92
3.70	.77	.77

3.12.1.3 Luminous transmittance. - The requirements of 3.12.1.3.1 and 3.12.1.3.2 shall be met with a source of radiance at the focal plane of the system specified.

3.12.1.3.1 Objective system.

a. Luminous transmittance. - Luminous transmittance shall be not less than 58% when observed through any area of the entrance pupil of the periscope.

b. Transmittance at 0.85 micron. - Transmittance at 0.85 micron shall be not less than 35%.

3.12.1.3.2 Eyepiece and erecting system. - This requirement shall be met when observing through the periscope exit pupil. Luminous transmittance shall be not less than 60%.

3.12.1.4 Head assembly. - The following requirements shall be met with the body assembly removed from Mount Assembly 1051350O:

a. Luminous transmittance. - Luminous transmittance shall be not less than 90%. The source of radiance shall be at the exit aperture of the head assembly and the observation made at the entrance aperture.

b. Resolution. - Resolution shall be 2.0 seconds of arc or less when observing with a telescope of at least 90 power. The entrance pupil of the telescope shall be not less than 7.0 inches. Resolution shall be as observed at one focus setting of the telescope.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.1.5 Resolution - periscope objective system. - The requirements of 3.12.1.5.1 and 3.12.1.5.2 shall be met with the specified line pairs per millimeter positioned at, and projected from the focal plane of the objective system.

3.12.1.5.1 On axis. - The objective system shall resolve 200 line pairs per millimeter on axis.

3.12.1.5.2 Off axis 0.35 inch. - The objective system shall resolve 200 line pairs per millimeter off axis 0.35 inch.

3.12.1.6 Objective T number. - The requirements of 3.12.1.6.1 and 3.12.1.6.2 shall be met with the source of radiance at the focal plane of the objective system. T number is defined as the (ratio of focal length to equivalent diameter) of an idealized circular lens which:

a. Has no obscuration or transmission loss.
b. Has the equivalent focal length of the system in question.
c. Delivers the same irradiance at the focal plane as the system in question.

3.12.1.6.1 On axis. - The T number of the objective system shall be not more than 2.74 as observed on axis.

3.12.1.6.2 Off axis 0.35 inch. - The T number of the objective system shall be not more than 3.20 as observed off axis 0.35 inch.

3.12.1.7 Resolution - unity power system. - This requirement shall be met with the conditions of 3.7a. Resolution of the unity power system shall be 1.0 minute or less of arc when observed through any area of the exit pupil with a 3 pcwer telescope having a 0.50 inch aperture.

3.12.1.8 Complete periscope (with image tube installed). - Unless otherwise specified, the requirements of 3.12.1.9 to 3.12.2.13 inclusive shall be met with:

a. The image tube installed in the periscope (see 3.12.1.8.1).
b. The conditions of 3.7a, 3.7d and 3.7f.
c. The connectors on Cable 8589783 for the oscillator and reticle projector assembled to their respective connectors.
d. The clear filter positioned in the optical train.
e. The periscope switch in the ON position and the reticle light intensity knob positioned as applicable.

3.12.1.8.1 Image intensifier tube, Government furnished. - When the image intensifier tube is provided by the Government,each tube shall be subjected to verification by the contractor for the following requirements prior to insertion into the periscope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.1.8.1.1 Physical defects. - The image tube shall show no evidence of external or internal damage such as chips, digs, scratches, loose Parts and other surface defects to fiber optics, glass and metal. The energized screen shall not contain pits, scratches or other surface defects in excess of tolerances specified in MIL-I-55536.

3.12.1.8.1.2 Voltage drop. - With an input voltage of 5.9 Vdc to the oscillator, and the oscillator output reading 2650 Vac (peak-to-peak), the image intensifier tube shall not cause a drop in voltage by more than 100 V (peak-to-peak) when the tube is placed in the circuit. There shall be no internal shorting, cathode fluttering or change in intensity nor bright or dark areas which could result in rejection of a complete periscope.

3.12.1.8.1.3 Luminance gain. - Luminance gain shall meet the requirements of MIL-I-55536.

3.12.1.8.1.4 Center resolution. - Center resolution shall meet the requirements of MIL-I-55536.

3.12.1.8.1.5 Image alinement. - Image alinement shall meet the requirements of MIL-I-55536

3.12.1.9 Cleanliness.

3.12.1.9.1 Head assembly. - There shall be no visible evidence of condensates, grease, fingerprints, and fractures when viewing the glass components by transmitting light from either end. In addition, the total number of dirt (or foreign) particles on the glass surface (combined) shall not exceed four (4) when viewing from either end. The maximum dimension of any particle shall be 0.025 inches.

3.12.1.9.2 Unity power system - body assembly. - There shall be no visible evidence of condensates, grease, fingerprints or fractures when viewing the glass components, by transmitted light from either end. In addition, the total number of dirt (or foreign) particles on the glass surfaces (combined) shall not exceed six (6) when viewing from the eye end. The maximum dimension of any particle shall be 0.025 inches.

3.12.1.9.3 Nine Power system.

a. With the image tube installed there shall be no more than six (6) particles of dirt (or foreign matter) appearing on the screen image when viewing from the eyepiece end of the periscope. The maximum apparent dimension of any particle shall not exceed the reticle line width. In addition, the minimum separation between particles shall represent 10 rnils in object space. (Excluding the image tube surface.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

b. With the image tube removed and a light source inserted in the tube cavity, there shall be no evidence of condensates, grease, fingerprints, fractures or adhesive separations when viewing the glass components from the objective and eyepiece end of the periscope. In addition, when viewing from the objective end, the total number of dirt (or foreign) particles on the glass surfaces (combined) shall not exceed four (4). The maximum apparent dimension of any particle shall be 0.025 inches.

3.12.1.10 Resolution - nine power system. - The nine power system shall be capable of resolving the following values (for the axis specified when observing a resolution target having the background luminance in foot lamberts (ft-1) and the contrast specified. Contrast (for the purpose of this requirement) is defined as the difference in density between the dark lines and the light background.

RESOLUTION TARGET		RESOLUTION	
Background Luminance	Contrast (density difference between black and clear)	On axis	OFF axis 2.0 degrees
1.5×10^{-2} ft-1	High 1.0 or greater	$.65R_T$	$.65R_T$
6×10^{-5} ft-1	Low 0.20 ± 0.5	.17	

R_T is the minimum on axis resolution requirement for the image intensifier tube. (The mandatory functional requirements of the Image Intensifier Tube, Type 8586/1 and Type 8586/2, are specified in MIL-I-555360

3.12.1.11 Contrast transfer. - The following values (for the axis specificed) shall be met with 2870° ± 100°K radiance, modulated at the spaial frequency (angular spacing) indicated, incident to the entrance aperture of the periscope. U_T is the minimum contrast transfer value obtained from the image intensifier tube assembly installed in the periscope being tested.

ANGULAR SPACING (in line pairs/milliradian) On axis	CONTRAST TRANSFER Vertical lines	Horizontal lines
.58	$.90U_T$	$.90U_T$
1.7	$.85U_T$	$.85U_T$
3.70	$.72U_T$	$.72U_T$

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.1.12 Luminance gain. - The luminance gain shall be not less than 525.

3.12.1.13 Stray light luminance. - This requirement shall be met with the periscope set for infinity focus. Stray light luminance contribution over the image of a black disk, subtending a solid angle equal to the field of view; in a white surround, subtending a solid angle of not less than 120 degrees, shall not exceed 20 percent.

3.12.1.14 Field of view. - The field of view shall be not less than 90 milliradians.

3.12.1.15 Projected reticle Pattern.

3.12.1.15.1 Definition and visibility, clear, medium and dark filters. - The image of the reticle pattern shall be well defined and clearly visible when viewed with the unaided eye under the following conditions:

a. The entrance window covered to prevent entrance of light using the clear and medium filter positions.

b. The periscope viewing an evenly illuminated field of not less than 10 foot lamberts luminance with the filter wheel in the dark position.

3.12.1.15.2 Reticle accuracy. - The angular value between the bore-sight cross and the maximum range graduation of the projected reticle pattern shall be within 2.0 percent of the value specified on the reticle drawing.

3.12.2 Accuracy. - Unless otherwise specified, the requirements of 3.12.2.1 through 3.12.2.3, 3.12.2.5 through 3.12.2.7.3, and 3.12.2.12 through 3.12.2:13.4 shall be met with:

a. The conditions of 3.7a, 3.7d and 3.7f.
b. ine connectors on Cable Assembly 8589783 for the oscillator and reticle projector assembled to their respective connectors.
c. The periscope switch in the ON position.
d. Datum Plane “A” defined as Datum Plane “A” shown on Drawing F10513360.
e. A plane defined by the two pads on Mount Assembly 10513500 (for the purpose of these requirements) referred to as Datum Plane “D”.
f. Surface “C” of the input coupling, shown on Drawing F1054220 4, positioned 67 degrees 30 minutes with respect to Datum Plane “A” as measured in a plane perpendicular to Datum Planes “A” and “D”.
g. Elevation defined as the direction of line of sight deviation which occurs when the angular value defined in 3.12.2f is increased.
h. The reticle light intensity knob positioned as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.2.1 Image steadiness. - The requirements of 3.12.2.2 and 3.12.2.3 shall be met with the connector on Cable Assembly 8589783 for the oscillator assembled to its respective connector, the conditions of 3.7a, 3.7d and 3.7f and the Image tube energized by positioning the periscope switch to ON.

3.12.2.2 Flicker. - This requirement shall be met subsequent to allowing a 15 second time lapse to permit stabilization of the image tube. There shall be no evidence of flicker or movement of the image.

3.12.2.3 Sparking. - This requirement shall be met subsequent to allowing a 15 second time lapse to permit stabilization of the image tube. There shall be no evidence of sparking or arcing.

3.12.2.4 Collimation. - The requirements of 3.12.2.4.1 and 3.12.2.4.2 shall be met with the angular value specified in 3.12.2f changed to 66 degrees.

3.12.2.4.1 Elevation. - A line of sight which is originally perpendicular to Datum Plane "D" shall emerge parallel to Datum Plane "D" within 0.5 mils.

3.12.2.4.2 Deflection. - A line of sight which is originally perpendicular to Datum Plane "D" shall emerge perpendicular to the intersection of Datum Planes "A" and "D" within 1.0 mil.

3.12.2.5 Image tilt. - The requirements of 3.12.2.5.1 and 3.12.2.5.2 shall be met with the angular value specified in 3.12.2f changed to 66 degrees.

3.12.2.5.1 Unity power system. - The image of a target line which is originally perpendicular to Datum Plane "A" shall emerge perpendicular to Datum Plane "A" within 2.0 degrees of arc.

3.12.2.5.2 Nine power system. - The image of a target line which is originally perpendicular to Datum Plane "A" shall emerge perpendicular to Datum Plane "A" within 2.0 degrees of arc.

3.12.2.6 Parallelism of reticle and image. - The image of a target line which is originally parallel to Datum Plane "A" shall be parallel within 1.0 degree of arc to the 600 meter range line.

3.12.2.7 Boresight movements. - The requirements of 3.12.2.7.1, 3.12.2.7.2 and 3.12.2.7.3 shall be met by the azimuth and elevation boresight movements.

3.12.2.7.1 Excursion range. - This requirement shall be met with the boresight cross originally in coincidence with an incident line of sight which is perpendicular to Datum Plane "D". The boresight movements shall provide a minimum of 6.0 mils movement in each direction simultaneously as read on the boresight scales.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.2.7.2 Reticle shift. - Changing the direction rotation of the boresight knobs, through the range specified in 3.12.2.7.1, shall not cause the reticle to deviate more than 0.10 mil in a direction perpendicular to the intended movement.

3.12.2.7.3 Backlash. - The boresight movements in azimuth and elevation shall be capable of meeting this requirement over the full limit of travel in each direction. Backlash in each boresight movement shall not exceed 0.10 mil.

3.12.2.8 Input coupling.

3.12.2.8.1 Excursion range. - Starting with the input coupling positioned at the angular value specified in 3.12.2, rotation of the input coupling shall cause the line of sight to elevate a minimum of 22.0 degrees and depress a minimum of 18.0 degrees.

3.12.2.8.2 Coupling level. - Rotation of the input coupling shall be limited by contact with the travel stop pin.

3.12.2.9 Plumb travel. - Starting with the input coupling positioned at the angular value specified in 3.12.2 and the line of sight in coincidence with a target line which is perpendicular to Datum Plane "A", the line of sight shall track the target line within 0.25 mil when elevated and depressed through the range specified in 3.12.2.8.1.

3.12.2.10 Elevation accuracy. - This requirement shall be met with backlash removed and the angle measured in a plane which is perpendicular to Datum Planes "A" and "D". The angle formed by the line of sight and Surface "C" of the input coupling shall remain constant within 0.20 mil at any elevation setting through the range specified in 3.12.2.8.1.

3.12.2.11 Backlash. - Backlash between the line of sight and the input coupling shall not exceed 0.05 mil.

3.12.2.12 Dioptral adjustment.

3.12.2.12.1 Zero setting. - The diopter scale shall indicate zero within 0.25 diopter when the screen of the image tube is brought into best focus by eyepiece adjustment when viewing with a dioptumeter.

3.12.2.12.2 Excursion range. - The diopter movement shall be adjustable through a minimum range of -3.5 to + 3.5 diopters from the zero diopter scale position of the eyepiece as read on a dioptometer when viewing the screen of the image tube.

3.12.2.12.3 Backlash. - Backlash in the diopter movement shall not exceed 1/8 diopter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

3.12.2.13 Focus.

3.12.2.13.1 Range.- Rotation of the focusing knob shall bring targets from 40 feet to infinity into focus.

3.12.2.13.2 Image shift due to range focus knob. - Rotation of the range focus knob by 4° ± 1°, clockwise and counterclockwise, from the best focus position at 1500 meters shall not cause the target image to shift more than 3 mils (total spread) relative to an auxiliary telescope at the eyepiece of the periscope. This requirement shall also be met with the range focus knob rotated from the best focus position.

3.12.2.13.3 Effect on diopter setting. - The diopter setting shall not change more than 0.25 diopter, as read on the diopter scale, when the focusing knob is rotated through the range specified in 3.12.2.13.1.

3.12.2.13.4 Image Centering. - With an incident line of sight perpendicular to Datum Plane "D" and the input coupling set at 66° with respect to Datum Plane "A", the target shall appear centered relative to the eyepiece diaphragm within 10 mils.

3.12.3 Operability. - The requirements of 3.12.3.1 through 3.12.3.3 shall be met at the temperature conditions of 3.3 and, where extreme operating temperatures are specified, with the periscope thermal stabilized at -65° and +150°F.

3.12.3.1 Disengagement of knob locks. - The direct force required to disengage the diopter knob and each boresight knob shall be within the limits of 2.0 to 5.0 pounds (lbs.). The direct force required at the extreme operating temperatures shall not exceed 9.0 lbs.

3.12.3.2 Torque. - The running torque required to rotate the controls listed below shall be within the limits specified for the temperature conditions of 3.3 and shall not exceed the values specified for extreme operating temperatures. The boresight slip scales and the filter lever shall be manually operable at all of the above temperatures.

Control	60° to 90°F	-65°F
Boresight knobs	5.0 in.-lbs. max.	8.0 in.-lbs. max.
Diopter knob	7.0 in.-lbs. max.	14.0 in.-lbs. max.
Focusing knob	1.5 - 8.0 in. lbs.	15.0 in.-lbs. max.

3.12.3.3 Panel assembly controls. - This requirement shall be met with the conditions of 3.7a, 3.7d and 3.7f applied; the connectors on Cable Assembly 8689783 for the oscillator and the reticle projector assembled to their respective connectors; and the battery terminals of the cable assembly connected to a 6 Vdc source. The image tube shall be energized when the periscope switch is in the "ON" position, and the "EMER" position respectively. Rotation of the reticle light intensity knob from the "OFF" position to its clockwise stop shall project the reticle pattern into the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

periscope Optical system, and shall cause the illumination of the reticle pattern to uniformly increase in intensity. Rotation of the panel light intensity knob from the "OFF" position to its clockwise stop shall illuxninate the panel lamps (4), and shall cause the panel lamps (4) to uniformly increase in intensity.

3.12.4 Sealing.

a. Periscope. - The periscope assembled in accordance with 3.7a shall withstand an internal pressure of 5 + 0.10 pounds per square inch gage (psig) for a minimum of 45 minutes with no evidence of leakage.

b. Head and body assembly with shipping covers installed. - The head and body assembly, with shipping covers, shall withstand an internal pressure of 5 ± 0.10 pounds per square inch gage (psig) for a minimum of 45 minutes with no evidence of leakage.

3.12.5 Flushing. - Upon satisfactory completion of sealing requirements of 3.12.4, the accepted Head Assembly 10542204 and Body Assembly 10542201, with shipping covers installed, shall be flushed with dry nitrogen. The flushing shall continue until the gaseous mixture bled from the head and body assembly has a dew point of at least -25°F. The units shall then be sealed,with dry nitrogen to an internal pressure of 3 psi ± .5 psi.

3.12.6 Cleanliness. - Upon satisfactory completion of flushing requirements of 3.12.5, the head assembly and body assembly shall meet the cleanliness requirements of 3.12.6.1, 3.12.6.2 and 3.12.6.3.

3.12.6.1 Head assembly. - There shall be no visible evidence of condensates or fractures when viewing the glass components by reflected light at the front window of the head assembly. The total number of dirt (or foreign) particles on the glass surfaces (combined) shall not exceed six (6). The maximum dimensions of any particle shall be 0.025 inches.

3.12.6.2 Body assembly, nine power system. - The requirements of 3.12.l.9.3a shall apply with the total number of dirt particles visible from the eyepiece end being increased from six (6) to eight (8).

3.13 Linkage Assembly 8287301.

3.13.1 Orientation. - The requirements of 3.13.1.1 and 3.13.1.2 shall be met with:

a. The assembly positioned as shown on Drawing F8287301.
b. The 2-1/4" by 0.250" mounting surfaces (shown on Drawing F10542037)horizontal within 30 minutes of arc.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the currentversion before use.

c. Tube 8635542 originally positioned 10 degrees 30 minutes + 3.0 degrees with respect to the 2-1/4° by 1-1/4″ mounting surfaces (85°49'35″ with respect to the angular position of Arm 10542031).
d. A constant resistance load of 3.0 inch pounds 2 1.0 inch pound applied to the oldham coupling.
e. A suspended weight (free rotating) of 8 pounds t 2 ounces positioned on the exposed end of Shaft 8287311.

3.13.1.1 Operability. - This requirement shall be met with the inner race of the Bearing 85701G8, on the free end of the linkage secured against rotation. The direct force, applied horizontally, required to change the angular value of surface "X" from 41 degrees to zero degrees, then back to 22 degrees 30 minutes shall not exceed 4.0 pounds. The direct force required while the linkage is thermally stabilized at -65° and +150°F shall not exceed 6 pounds.

3.13.1.2 Backlash. - Backlash between Clamp 10542030 and Coupling 8620152 shall not exceed 0.10 mil.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval. - The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 periscopes with associated equipment plus 3 each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. - When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection Provisions.

4.3.1 Submission of Product. - Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MXL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. - All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply. Examination, and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables VI through XV. Examination and tests for packaging, packing, and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables VI through XV shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE VI - CLASSIFICATION OF DEFECTS
PANEL ASSEMBLY: 10549788

CLASS	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
CRITICAL:	NONE		
MAJOR:	AQL 1.0% Defective		
101.	Vibration	3.8	4.6.3
102.	Rheostat performance	3.10.2.1	4.6.7.3.1
103.	Rheostat R1	3.10.2.2	4.6.7.3.2
104.	Rheostat R2	3.10.2.3	4.6.7.3.3
105.	Rheostat R3	3.10.2.4	4.6.7.3.4
106.	Regulated output, switch SI "OFF"	3.10.2.5	4.6.7.3.5.1
107.	Regulated output, 30 Vdc with minimm load	3.10.2.5	4.6.7.3.5.2
108.	Regulated output, 18 Vdc with minimum load	3.10.2.5	4.6.7.3.5.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE VI - CLASSIFICATION OF DEFECTS (Cont'd)

CLASS CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
109. Regulated output, 18 Vdc with maximum load	3.10.2.5	4.6.7.3.5.4
110. Regulated output, 30 Vdc with maximum load	3.10.2.5	4.6.7.3.5.5
111. Regulated output, 6.2 Vdc with maximum load	3.10.2.5	4.6.7.3;5.6
112. Regulated output, 6.2 Vdc with minimum load	3.10.2.5	4.6.7.3.5.7
113. Operability of controls	3.10.3	4.6.7.4

MINOR: NONE

NOTE: The tests in Table VI shall be conducted at a temperature between +60° and +90°F.

TABLE VII - cLASSIFICATION OF DEFECTS

MOUNT PERISCOPE: 10513360

CLASS CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
CRITICAL: NONE		
MAJOR : AQL 1.0% Defective		
114. Vibration	3.8	4.6.3
115. Periscope mounting repeat-ability	3.11.1	4.6.8.1
116. Periscope, insertion and remova 1	3.11.2	4.6.8.2
117. Periscope, locking lever	3.11.3.1	4.6.8.3.1
118. Shield actuating handle	3.11.3.2	4.6.8.3.2
119. Handle locking latch	3.11.3.3	4.6.8.3.3
120. Motor and linkage	3.11.3.4.1	4.6.8.3.4
121. Limit switch, wiper mechanism	3.11.3.4.2	4.6.8.3.5
122. Circuit breaker	3.11.3.4.3	4.6.8.4

MINOR: NONE

NOTE: The tests in Table VII shall be conducted at a temperature between +60° and +90°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE VIII - CLASSIFICATION OF DEFECTS

LINKAGE ASSEMBLY: 8287301

CLASS CHARACtRISTIC	REQUIREMENTS	TEST PROCEDURES
CRITICAL: NONE		
MAJOR: AQL 1.0% Defective		
123. Vibration	3.8	4.6.5
124. Backlash	3.13.1.2	4.6.9.1.1
125. operability	3.13.1.1	4.6.9.1.2
MINOR: NONE		

NOTE: The tests in Table VIII shall be conducted at a temperature between +60° and +90°F.

TABLE IX - CLASSIFICATION OF DEFECTS

PERISCOPE, TANK: XM44E1 and XM44E2

CLASS CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
CRITICAL: NONE		
MAJOR; AQL 1.0% Defective		
126. Line of sight, orientation, pre-vibration	3.8	4.62
127. Vibration	3.8	4.6.3, 4.6.5
128. Line of sight retenTion, post-vibration	3.8	4.6.4
129. Dielectric strength	3.9	4.6.6
130. Luminous transmittance, head assembly	3.12.1.4a	4.6.10.1.7
131. Resolution, head assembly	3.12.1.4b	4.6.10.1.8
132. Resolution, unity power system	3.12.1.7	4.6.10.1.13
133. Cleanliness, head assembly	3.12.1.9.1	4.6.10.3.1
134. Cleanliness, unity power system	3.12.1.9.2	4.6.10.3.2
135. Cleanliness, nine power system, tube installed	3.12.1.9.3a	4.6.10.3.3
136. Cleanliness, nine power system	3.12.1.9.3b	4.6.10.3.4
137. Resolution, nine power system on axis	3.12.1.10	4.6.10.3.5
138. Field of view	3.12.1.14	4.6.10.3.10
139. Projected reticle pattern, definition and visibility	3.12.1.15.1	4.6.10.3.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE IX - CLASSIFICATION OF DEFECTS (Cont'd)

CLASS	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
140.	Reticle accuracy	3.12.1.15.2	4.6.10.3.12
141.	Flicker, image steadiness	3.12.2.1	4.6.10.4.1
142.	Sparking, image steadiness	3.12.2.2	4.6.10.4.2
143.	Collimation, elevation	3.12.2.4.1	4.6.10.4.3
144.	Collimation, deflection	3.12.2.4.2	4.6.10.4.3
145.	Image tilt, unity power system	3.12.2.5.1	4.6.10.4.4
146.	Image tilt, nine power system	3.12.2.5.2	4.6.10.4.5
147.	Parallelism of reticle and image	3.12.2.6	4.6.10.4.6
148.	Excursion range, boresight movements	3.12.2.7.1	4.6.10.4.7
149.	Reticle shift, azimuth and elevation boresight movement	3.12.2.7.2	4.6.10.4.8
150.	Backlash, azimuth and elevation boresight movement	3.12.2.7.3	4.6.10.4.9
151.	Elevation accuracy, input coupling	3.12.2.10	4.6.10.4.10
152.	Excursion range, input coupling	3.12.2.8.1	4.6.10.4.11
153.	Plumb travel	3.12.2.9	4.6.10.4.12
154.	Backlash, input coupling	3.12.2.11	4.6.10.4.13
155.	Input coupling travel	3.12.2.8.2	4.6.10.4.14
156.	Zero setting of diopter scale	3.12.2.12.1	4.6.10.4.15
157.	Excursion range, diopter movement	3.12.2.12.2	4.6.10.4.16
158.	Backlash, diopter movement	3.12.2.12.3	4.6.10.4.17
159.	Focus range	3.12.2.13.1	4.6.10.4.18
160.	Image shift due to range focus knob	3.12.2.13.2	4.6.10.4.19
161.	Focus effect on diopter setting	3.12.2.13.3	4.6.10.4.20
162.	Image centering	3.12.2.13.4	4.6.10.4.21
163.	Operability, disengagement of knob locks	3.12.3.1	4.6.10.5
164.	Operability, torque	3.12.3.2	.4.6.10.6
165.	Operability, panel assembly controls	3.12.3.3	4.6.10.7
166.	Sealing, assembled periscope	3.12.4a	4.6.10.8
167.	Sealing, head assembly with shipping cover installed	3.12.4b	4.6.10.9
168.	Sealing, body assembly with shipping cover installed	3.12.4b	4.6.10.9
169.	Flushing, head and body assembly	3.12.5	4.6.10.10
170.	Cleanliness, head assembly	3.12.6.1	4.6.10.11
171.	Cleanliness, body assembly nine power system	3.12.6.2	4.6.10.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE IX - CLASSIFICATION OF DEFECTS (Cont'd)

MINOR: NONE

NOTE: The tests in Table IX shall be conducted at a temperature between +60° and +90°F.

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General. - One periscope with associated equipment shall be selected at random from each 100 produced or from each month's production whichever occurs first. The sample shall meet the requirements and tests in Table X.

TABLE X

NO.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
301.	Fabrication	3.2	Applicable Drawings - visual
302.	General specification	3.4	MIL-F-13926 - visual
303.	Workmanship	3.5	Visual - tactile

4.4.2 Environmental.

4.4.2.1 Panel assembly. - Three panel assemblies shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall have met the requirements and tests in Table VI.

TABLE XI

No.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
304.	Extreme storage temperatures (-80°F to 160°F)	3.6	4.6.1
305.	Operability of controls (-65° and 150°F)	3.10.3	4.6.1.1, 4.6.7.4

4.4.2.2 Periscope mount. - Three periscope mounts shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall have met the requirements and tests in Table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE XII

NO.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
306.	Extreme storage temperatures (-80°F to +160°F)	3.6	4.6.1
307.	Periscope locking lever	3.11.3, 3.11.3.1	4.6.1.1, 4.6.8.3.1
308.	Shield actuating handle	3.11.3, 3.11.3.2	4.6.1.1, 4.6.8.3.2
309.	Handle locking latch	3.11.3, 3.11.3.3	4.6.1.1, 4.6.8.3.3
310.	Motor and linkage	3.11.3, 3.11.3.4.1	4.6.1.1, 4.6.8.3.4
311.	Limit switch	3.11.3, 3.11.3.4.2	4.6.1.1, 4.6.8.3.5
312.	Sealing	3.11.4	4.6.8.5

NOTE: The tests for Characteristics 307 through 311 inclusive shall be conducted at-65°F and +150°F. The test for Characteristic 312 shall be conducted at a temperature between +60° and +90°F.

4.4.2.3 Linkage assembly. - Three linkage assemblies shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall have met the requirements and tests in Table XIII and shall then meet the requirements and tests in Table VIII.

TABLE XIII

NO.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
313.	Extreme storage temperature (-80°F to +160°F)	3.6	4.6.1
314.	operability of linkage assembly (-65°F and +150°F)	3.13.1.1	4.6.1.1, 4.6.9.1.2

4.4.2.4 Periscope, Tank, XM44E1 and XM44E2. - Three periscopes shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall meet the requirements and tests in Table XIV and shall then meet the requirements and tests in Table IX, with exception of Characteristics 126, 127 and 128.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE XIV

NO.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
315.	Line of sight orientation	3.8	4.6.2
316.	Extreme storage temperatures (-80°F to +160°F)	3.6	4.6.1
317.	Operability, disengagement of knob locks (-65°F and +150°F)	3.12.3, 3.12.3.1	4.6.1.1, 4.6.10.5
318.	Operability, torque (-65°F and +150°F)	3.12.3, 3.12.3.2	4.6.1.1, 4.6.10.6
319.	Operability, panel assembly controls (-65°F and +150°F)	3.12.3, 3.12.3.3	4.6.1.1, 4.6.10.7
320.	Vibration	3.8	4.6.3
321.	Line of sight retention, post vibration	3.8	4.6.4
322.	Contrast transfer off-axis, objective system	3.12.1.2.1b	4.6.10.1.2
323.	Contrast transfer off-axis, eyepiece and erecting system	3.12.l.2.2b	4.6.10.1.3
324.	Luminous transmittance, objective system	3.12.l.3.1a	4.6.10.1.4
325.	Luminous transmittance at 0.85 micron, objective system	3.12.l.3.1b	4.6.10.1.5
326.	Luminous transmittance, eye-piece and erecting system	3.12.1.3.2	4.6.10.1.6
327.	Resolution on-axis, objective system	3.12.1.5.1	4.6.10.1.9
328.	Resolution off-axis, objective system	3.12.1.5.2	4.6.10.1.10
329.	Objective T number on-axis	3.12.1.6.1	4.6.10.1.11
330.	Objective T number off-axis	3.12.1.6.2	4.6.10.1.12
331.	Resolution, nine power system off-axis	3.12.1.10	4.6.10.3.6
332.	Stray light luminance	3.12.1.13	4.6.10.3.9

NOTE: The tests for Characteristics 315 and 320 through 332 inclusive, shall be conducted at a temperature between +60° and +90°F.

4.4.2.5 Periscope, Tank: XM44E1 and XM44E2. - All periscopes produced (100% inspection) including those subjected to Tables IX and XIV shall meet the requirements and tests in Table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

TABLE XV
100%-iNSPECTION

NO.	CHARACTERISTIC	REQUIREMENTS	TEST PROCEDURE
333.	Contrast transfer, on-axis objective system	3.12.l.2.la	4.6.10.1.1
334.	Contrast transfer, on-axis eyepiece and erecting system	3.12.l.2.2a	4.6.10.1.3
335.	Contrast transfer, on-axis (image tube installed)	3.12.1.11	4.6.10.3.7
336.	Luminance gain	3.12.1.12	4.6.10.3.8

NOTE: The tests for Characteristics 333 through 336 inclusive, shall be conducted at a temperature between +60° and +90°F.

4.4.3 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4,5.1 Government furnished inspection equipment. - Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. - Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the technical data package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in “Examination” and “Test Facilities” requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the currentversion before use.

90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Inspection equipment design requirements.

4.5.2.3.1 Orientation, vibration (pre-vibration and post-vibration line of sight), and periscope mounting repeatability. - The special testing equipment shall consist of the following three main assemblies:

a. Mounting plate assembly
b. Line of sight test stand assembly
c. Vibration test stand assembly
d. Vibrating machine

4.5.2.3.1.1 Mounting plate assembly. - The mounting plate assembly shall simulate the vehicle turret roof (see Drawing F10513360 for turret roof thickness), and shall permit mounting and orienting the periscope with appropriate equipment as specified in 3.8. A device shall be incorporated on the mounting plate assembly that positions and solidly arrests surface "C" of the periscope input coupling, as shown on Drawing F10542204, 67 degrees 30 minutes ± 10 seconds with respect to Datum Plane "A" of the head assembly. Features shall be designed into the mounting plate assembly that will assure. positive and accurate positioning and repositioning (repeated removal and replacement) of the mounting plate assembly. on the line of sight test stand assembly within 5 seconds in all planes.

4.5.2.3.1.2 Line of sight test stand assembly. - The assembly shall function as a holder for the mounting plate assembly with the periscope and all appropriate equipment in their normal operating position. Features shall be designed into the line of sight test stand assembly that will assure positive and accu rate positioning and repositioning (repeated removal and replacement) of the mounting plate assembly on the test stand assembly within 5 seconds in all planes. A target projector collimator having a clear aperture of at least 7 inches, with an appropriate cross-line reticle pattern shall also be part of the test stand assembly. The target projector collimator shall be mounted so that the optical axis of the collimator is in alinement with the line of sight emitting from the objective end of the periscope. A set-up device of the front surface reflecting mirror type shall be utilized for the alinement (auto-collimation) of the target projector collimator. The optical axis of the target projector collimator shall be alined (auto-collimated) parallel with respect to Datum Plane "A" of the periscope and perpendicular with respect to Datum Plane "B" of the periscope within 5 seconds. The above set-up device and all additional set-ups for testing equipment, with complete provisions necessary for certification and proof of accuracy of the test equipment shall be provided and will become part of the test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.5.2.3.1.3 Vibration test stand assembly. - The vibration test stand assembly shall function as a holder for the mounting plate assembly with periscope and all appropriate equipment in their normal operating position. Features shall be designed into the vibration test stand assembly that will assure positive and secure mounting of the mounting plate assembly on the vibration test stand. The vibration test stand shall be firmly and securely mounted on a vibration machine.

4.5.2.3.1.4 Vibrating machine. - The vibrating machine shall be capable of providing the amplitude and frequency specified in 3.8e. The vibrating machine shall also be capable of vibrating the periscope, and applicable equipment, along 3 mutually perpendicular axes while the periscope with equipment is maintained in the position specified in 4.5.2.3.1.3.

4.5.2.3.1.5 Accuracy. - The special testing equipment utilized for the following tests shall conform to 4.5.2.3.1.5.1, 4.5.2.3.1.5.2, 4.5.2.3.1.5.3 and 4.5.2.3.1.5.4.

a. Collimation, elevation and deflection
b. Image tilt, unity power and nine power systems
c. Parallelism of reticle and image
d. Boresight movements, excursion range
e. Reticle shift and backlash
f. Excursion range, input coupling
g. Coupling travel, input coupling
h. Plumb travel
i. Elevation accuracy and backlash

4.5.2.3.1.5.1 Orientation and mounting of the Periscope. The special testing equipment shall consist of a mounting plate assembly which shall simulate the vehicle turret roof (see Drawing F10513360 for turret roof thickness) and shall permit orienting and mounting the periscope with appropriate equipment as specified in paragraph 3.12.2. A test stand assembly, capable of positioning and securing the mounting plate assembly with periscope and appropriate equipment attached, shall be a part of the test equipment. Adjustments shall be provided on the test stand assembly to permit orientation of Datum Plane “A” in a horizontal plane within 10 seconds. The test equipment shall also consist of a device that is capable of positioning and solidly arresting Surface “C” of the periscope coupling, as shown on Drawing F10542204, 67 degrees 30 minutes ± 10seconds with respect to Datum Plane “A” of the mount. This device, subsequent to the above positioning, shall also be capable of articulation of Surface “C” to any angular position between its travel stops. A front surface reflecting mirror, capable of adjustment in all planes, mounted directly on the periscope coupling positioning device, shall be positioned so that the reflecting surface of the reflecting mirror is in alinement with the line of sight emitting from the objective end of the periscope. A calibrated penta prism shall be utilized in the line of sight between a viewing collimator and head assembly. When the head assembly (less

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

body assembly) is inspected for the requirements of 3.12.2.4 and 3.12.2.8 through 3.12.2.11, the testing equipment for the head assembly tests shall be accurate within 5 seconds.

4.5.2.3.1.5.2 Target collimator. - A target projector collimator, with a clear aperture of at least 7 inches, with an appropriate test reticle pattern, shall be a part of the test equipment. The target projector collimator shall be positioned and mounted so that the optical axis of the collimator is in alinement with the line of sight emitting from the objective end of the periscope. The target projector collimator test reticle shall be within the accuracies indicated for the following requirements:

Reticle shift Backlash (boresight movements)	Five seconds of arc
Parallelism of reticle and image	Six minutes of arc
Image centering	1 mil
Unity power system Nine power system	twelve minutes of arc

4.5.2.3.1.5.3 Viewing collimator. - A viewing collimator, capable of measuring any line of sight deviations at the periscope eyepiece, in the "X" and "Y" co-ordinates in seconds of arc shall be a part of the test equipment. The viewing collimator shall be mounted so that the optical axis of the collimator is in alinement with the line of sight emitting from the eyepiece of the periscope.

4.5.2.3.1.5.4 Set-up device. - A set-up device of the front surface reflecting mirror type shall be utilized for the alinement (auto-collimation) of the periscope coupling articulation device front surface reflecting mirror, the target projector collimator, and the viewing collimator. The reflecting surface of the periscope coupling articulation device front surface reflecting mirror or shall be alined (auto-collimated) perpendicular with respect to Datum Plane "A" and parallel with respect to Datum Plane "D" (see 3.12.2e) within 5.0 seconds. The optical axis of the target projector collimator shall be alined (auto-collimated) parallel with respect to Datum Plane "A" and perpendicular to Datum Plane "D" within 5.0 seconds. The optical axis of the viewing collimator shall be alined (auto-collimated) parallel with respect to Datum Plane "A" and perpendicular to Datum Plane "D" within 5.0 seconds. The optical axis of the viewing collimator shall be alined (auto-collimated) parallel with respect to Datum Plane "A" and perpendicular to Datum Plane "D" within 5.0 seconds. The set-up device shall also be capable of alining the meting coupling of the periscope coupling articulation device at 67 degrees 30 minutes within 10 seconds with respect to Datum Plane "A". All additional set-up and calibration equipment, with complete provisions necessary for certification and proof of accuracy of the test equipment shall be provided and shall become part of the testing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.5.2.3.2 Image intensifier tube. - The testing equipment shall conform to the applicable test equipment requirements of MIL-I-55536 for testing luminance gain, center resolution, and image alinement of the image intensifier tube. The testing equipment shall provide the necessary features for monitoring the voltages utilized in the tests of the image tube.

4.5.2.3.3 Orientation and backlash - linkage assembly. - The special testing equipment utilized to mount and orient the linkage assembly for the backlash test shall conform to the following requirements:

a. The testing equipment shall be capable of mounting and orienting Linkage Assembly 8287301 as required in 3.13.1.

b. An adjustable and moveable holding device shall be a part of the test equipment that shall permit the mounting, securing, fine adjustment and movement of Connector 8635540. Subsequent to the mounting and securing of Connector 8635540, the holding device shall be capable of adjustment so that the axis through Tube 8635542 can be positioned at 10 degrees 30 minutes ± 3.0 degrees with respect to the 2-1/4 by 1-1/4" mounting surfaces (85°49'35" with respect to the angular position of Arm 10542031).

c. A viewing collimator, capable of measuring line of sight deviations in elevation or depression, in seconds of arc, shall be a part of the test equipment. The vieing collimator shall be located and mounted in such a manner so that the viewing collimator may be elevated and depressed in direct relation with and on the same axis as Coupling 8620152.

d. A front surface mirror shall also be provided on the test equipment. The mirror shall be located and mounted directly in front of the objective end of the viewing collimator in alinement with the line of sight emitting from the viewing collimator. The mirror shall be capable of being adjusted in all planes.

e. All set-up and calibrated equipment with complete provisions, necessary for certification and proof of accuracy of the test equipment, shall be provided and shall become part of the testing equipment.

4.5.2.3.3.2 Operability - linkage assembly. - The special testing equipment utilized to mount and orient the linkage assembly for the operability test shall conform to the following requirements.

a. The testing equipment shall be capable of mounting and orienting Linkage Assembly 8287301 as required in 3.13.1.

b. A direct force type tester with a minimum range of from zero pounds to 7 pounds, the accuracy of which shall be ± 0.5 pound throughout the entire zone of excursion, shall be provided as part of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

the test equipment.

c. An adapter that is capable of positioning the Tube 8635542, as specified in 3.14.1c, shall be provided as part of the test equipment. The adapter shall provide for immobilizing the ball of the spherical bearing, on the free end of the linkage, against rotation during the test. The adapter shall also permit the outer member of the spherical bearing to rotate freely about the ball.

4.5.2.3.4 Sealing - periscope. - Special testing equipment to test sealing of the periscope shall conform to the internal pressure test requirements of Sheet 1 of Drawing F8565556, Pressure Tester-Two Station, except that the regulator shall conform to the requirements for use of dry air.

4.5.2.3.5 Sealing - head and body assemblies. - Special testing equipment to test sealing of the head and body assemblies shall conform to the internal pressure test requirements of Sheet 1 of Drawing F8565556, Pressure Tester-Two Station.

4.5.3 Test equipment. - In conjunction with 4.5.2.3 the following standard test equipment shall be utilized in the performance of the applicable tests as specified in 4.6:

NOMENCLATURE	DESCRIPTION
Regulated voltage supply	Wide input voltage and frequency range: 105 - 135 vac, 45 - 480 cycles per second. Regulation: .015% or 1 millivolt (line or load). Ripple: 250 microvolt RMS, 1 millivolt peak-to-peak. Voltage range continuously variable between 0-40 Vdc. Current: 4.0 amperes.
Dc milliammeter, clip-on	Accuracy: ± 2% of full scale.
Automatic dc digital voltmeter	Accuracy: ± 2% of reading.

4.5.4 Set-up and calibration. - Rigidity, stability, ease of maintenance, and adaptability of set-up and calibration equipment with complete provisions are also prime requirements. All set-up and calibration equipment necessary for certification of the testing equipment accuracy shall be furnished and will become a part of the testing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6 Test methods and procedures.

4.6.1 Extreme storage temperature. - The periscope subjected to this test shall not be assembled to its mount, but shall be tested as a head assembly and body assembly. These assemblies shall have their respective shipping covers installed. The head assembly and body assembly shall be pressurized with dry nitrogen to an internal pressure of 3 psi ± .5 psi. The nitrogen gas shall have a dew point at least as low as -25°F. The head assembly and body assembly (periscope) with associated equipment shall be exposed to the temperatures specified in 3.6 utilizing testing equipment in accordance with the "Test Facilities" requirements of MIL-F-13926. This equipment shall be capable of maintaining the specified temperatures until thermal stabilization is reached. The head assembly and body assembly (periscope) with associated equipment shall be exposed to each specified temperature extreme for a minimum of 5 hours, and then permitted to return to an ambient temperature between +60° and 90°F. The shipping covers shall be removed from their respective assemblies. The head assembly and body assembly (periscope) with associated equipment plus the shipping covers shall be subjected to a visual and tactile examination for evidence of physical failure. The head assembly and body assembly with associated equipment plus the shipping covers shall conform to the requirements of 3.6.

4.6.1.1 Extreme operating temperature. - Testing equipment utilized in this test shall be in accordance with "Test Facilities" requirements of MIL-F-13926 and the applicable conditions of 3.10.3, 3.11.3, 3.12.3 and 3.13.1.1. The periscope shall be assembled to the mount assembly and pressurized with dry nitrogen to an internal pressure of 3 psi ± .5 psi. The nitrogen gas shall have a dew point at least as low as -25°F. The periscope with associated equipment shall be exposed to each specified temperature for a period of five hours. At the end of each five hour period and while still at the temperature extreme the periscope with associated equipment shall be subjected to the applicable tests specified in 4.6.7.4, 4.6.8.3, 4.6.9.1.2, 4.6.10.5, 4.6.10.6 and 4.6.10.6.1.

4.6.2 Line of sight orientation. - The periscope, mount, cable assembly and panel assembly shall be positioned as specified in 3.7 utilizing special testing equipment conforming to 4.5.2.3.1. Position the periscope switch on the Panel Assembly 10549788 to the "ON" position. Set the focusing knob of the periscope for the appropriate range setting for this test. Adjust the diopter knob of the periscope for best focus of the phospor grain on the screen of the image tube, while viewing through the periscope eyepiece. Adjust the periscope reticle for best intensity. Obtain coincidence of the horizontal and vertical reticle lines of the periscope and the target image crosslines by means of the periscope boresight knobs. While maintaining the coincidence of reticle lines and target image lines, slip the scales of the boresight knobs to their nominal "zero". Subsequent to setting the boresight knob scales to zero, remove the mounting plate assembly (4.5.2.3.1.1) with periscope and equipment from the line of sight test stand (4.5.2.3.1.2). Position

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:53Z
Check the source to verify that this is the current version before use.

the mounting plate assembly with periscope and equipment on the vibration test stand (4.5.2.3.1.3) and subject the periscope and equipment to the test in 4.6.3. Caution must be exercised during this transfer of the mounting plate assembly. All unnecessary shocks which would tend to rendm the testing equipment inaccurate for subsequent tests shall he avoided.

4.6.3 Vibration of periscope, mount, cable assembly and panel assembly. - Perform this test with the periscope and equipment positioned, as specified in 3.8, on special testing equipment that conforms to 4.5.2.3.1.4. Energize the Panel Assembly 10549788 as specified in 3.7f, and position its switch and knobs as indicated in 3.8d. The periscope with equipment shall be vibrated in accordance with Procedure IX, Part 1, of MIL-STD-810, except that the frequency, frequency cycling and amplitude of vibration shall be as specified in 3.8. During the vibration cycle the periscope and equipment shall be subjected to a visual examination. The periscope shall conform to the requirements of 3.8f and 3.8g. Immediately following the vibration cycle, and prior to the examination for evidence of physical failure the periscope and equipment shall be subjected to the test in 4.6.4. Caution shall again be exercised during transfer of the mounting plate assembly with the periscope and equipment. Upon completion of the test in 4.6.4 the periscope, mount, cable assembly and panel assembly shall be subjected to the tests specified in 4.6.5.1.

4.6.4 Line of sight retention - post vibration. - Conduct this test subsequent to vibration, and prior to the examination for physical failure resulting from vibration. Position the mounting plate assembly (4.5.2.3.1.1) with the periscope and equipment, on the line of sight test stand as in 4.6.2. Inspect the periscope boresight knobs for any evidence of rotation from their "zero" setting established in 4.6.2. Observe the periscope horizontal and vertical reticle lines with respect to the target image crosslines. Any lack of coincidence between the periscope reticle lines and the target image lines shall not exceed the tolerance specified in 3.8i, as measured on the periscope boresight knobs.

4.6.5 Vibration of linkage assembly, plate assembly, battery mounting bracket, boresight aid assembly and washer, pump and reservoir assembly. - Perform this test with the assemblies and bracket positioned on special testing equipment that conforms to 4.5.2.3.1.4, in the manner in which they are to be used, by means of adapters containing the necessary mounting and holding features. The assemblies and bracket shall be vibrated in accordance with Procedure IX, Part 1 of MIL-STD-810, except that the frequency, frequency cycling and amplitude of vibration shall be as specified in 3.8. Upon completion of the vibration cycling the assemblies and bracket shall be subjected to the tests specified in 4.6.5.1.

4.6.5.1 Examination. - Subsequent to vibration the periscope, mount, cable assembly, panel assembly, linkage assembly, plate assembly, battery mounting bracket, boresight aid assembly and washer, pump and reservoir assembly shall be thoroughly examined for any evidence of physical failure. A visual and tactile examination shall be made for missing or damaged parts. A tactile examination shall also be conducted to determine looseness or improper functioning of moving parts, where applicable. An audible

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

examination shall be made of the periscope, mount and panel assemblies by shaking them and listening for loose internal parts or broken components. Any one of the possible defects defined above shall be cause to consider any assembly defective. Periscope, mounts, panels and the other specified assemblies shall be subjected to the tests in 4.6.6 through 4.6.10.7 inclusive to determine overall compliance to 3.8.

4.6.6 Dielectric strength. - Perform this test in accordance with Method 301 of MIL-STD-202, utilizing standard measuring equipment. Dielectric strength shall be in conformance with the requirements of 3.9. This is an in process test that is performed with the components specified in 3.9 removed from the circuitry. The inspection records for each periscope with equipment shall indicate the results of this test.

4.6.7 Panel Assembly 10549788.

4.6.7.1 Primary power source. - When a primary power input of 18 Vdc to 30 Vdc is required for tests, the regulated power supply specified in 4.5.3 shall be connected to the panel assembly as indicated in 3.10.1.1. The automatic dc digital voltmeter shall be utilized for this verification of the output voltage when the power supply is adjusted from 18 Vdc to 30 vdc.

4.6.7.2 Emergency primary power source. - When a primary power input of 6.0 Vdc is required for tests, the regulated power supply specified in 4.5.3 shall be connected to the panel assembly as indicated in 3.10.1.2. The automatic clc digital voltmeter shall be utilized for the verification of the output voltage.

4.6.7.3 Operational performance. - Unless othemise specified, the panel assembly shall be energized to the conditions specified in 3.10.2 in the performance of the following tests utilizing the test equipment specified under 4.5.3.

4.6.7.3.1 Rheostat performance. - Adjust the power supply to apply the vdc to each of the specified rheostat circuits as designated in 3.10.2.1. For each respective circuit load, the respective knob shall be rotated as specified in 3.10.2.1. Throughout the range of rotation, for each knob, observe the digital voltmeter to determine compliance with the requirements of 3.10.3.1.

4.6.7.3.2 Rheostat R1. - This test shall be performed with the primary power source voltages in Table II applied as specified in 3.10.2.2. Switch S1 shall be in the “OFF” position during this test. The total measured current controlled by Rheostat R1 for each respective rheostat wiper arm position and applied primary power source voltage shall be within the tolerance specified in Table II of 3.10.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.7.3.3 Rheostat R2. - This test shall be performed with the primary power source voltages in Table III applied as specified in 3.10.1.2. Switch s1 shall be in the "EMERGENCY" position during this test. The measured Rheostat R2 output voltage for each respective circuit under the specified dc load conditions, rheostat wiper arm positions, and applied primary power shall exhibit the voltages specified in Table III of 3.10.2.3.

4.5.7.3.4 Rheostat R3. - This test shall be performed with the panel assembly energized as specified in 3.10.2.3. Switch S1 shall be in the "CENTER-OFF" position during this test. This measured R3 output voltage (existing between chassis ground and the terminals specified in 3.10.2.4) for each respective circuit under the specified dc load conditions, rheostat wiper arm positions, and applied primary power source shall exhibit the voltages specified in Table IV of 3.10.2.4.

4.6.7.3.5 Output of voltage regulated supplies. - Prior to conducting the tests of the regulated outputs in Table V the following preliminary adjustments shall be made to the panel assembly:

a. Set the input voltage to +24 VDc at J1-H
b. Set the battery charging circuit to maximum load (shorted battery) condition
c. Set the reticle projector load to 800 ma
d. Set the high voltage oscillator load to 20 ma
e. Adjust the trimpot on" TB 2 to provide +5.9 volts output at J1-L

Subsequent to the preliminary adjustments, the panel assembly shall be energized and subjected to the following tests. The applicable primary power input voltages required (Table V) shall be applied as specified in 3.10.1.1 and 3.10.1.2. All circuits shall be tested at minimum and maximum voltage inputs, and minimum and maximum loads as indicated in Table V, and the following testing notes.

TESTING NOTES AND DEFINITIONS

BATTERY CHARGING CIRCUIT= With battery fully charged battery load current = 0 amps.
With battery fully discharged battery load current = .320 amps. max.

TESTING UNDER VEHICLE POWER (18-30 VDC)

TOTAL MAX. LOAD = Reticle (.800 amps) + secondary regulator (.020 amps) + battery (.320 amps) = 1.140 amps.

MIN. LOAD = No current drawn by reticle or battery
Secondary regulator will draw .010 amp

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the currentversion before use.


TESTING NOTES AND DEFINITIONS (Cont'd)

TESTING UNDER EMERGENCY POWER (6.2 VDC)

MAX. LOAD = Reticle (.600 amps) + secondary regulator (.020 amps) = .620 amps

MIN. LOAD = Secondary regulator (.010) = .010 amps

TEST SET-UP-OUTPUTS

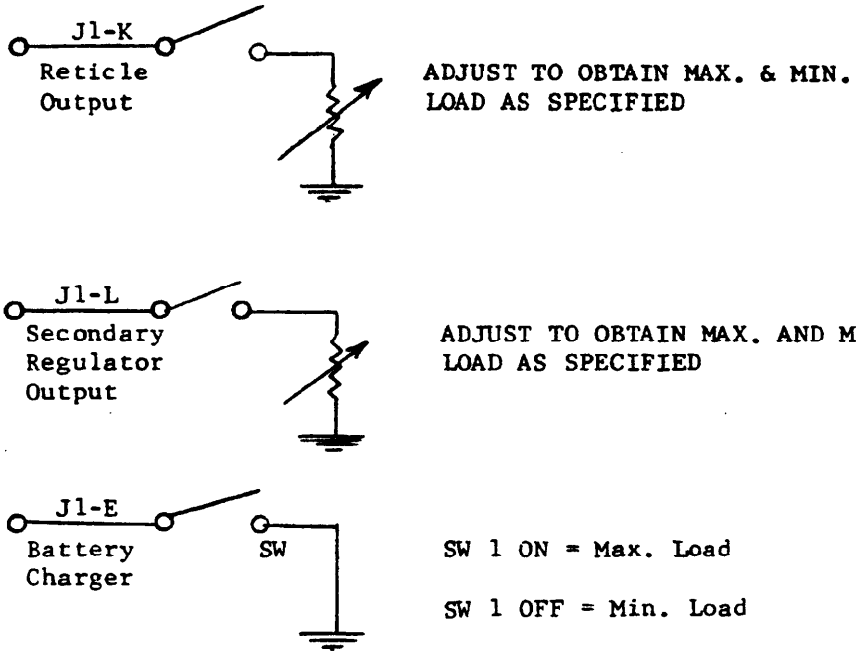

NOTE: Use leads as short as possible when testing under emergency power conditions.

4.6.7.3.5.1 Regulated output Switch S1 OFF. - With Switch S1 in the OFF position, load the battery charging circuit to the minimum and maximum resistance values in Table V and measure for the applicable voltage and current values from Table V. Test for the disconnection of the oscillator and reticle voltage outputs as designed in 3.0.2.5.

4.6.7.3.5.2 Regulated output, 30 VDC input with minimum loads. - Apply 30 VDC to the panel asembly with S1 in the "Vehicle Power ON" position with the battery charging, high voltage oscillator and reticle projector outputs loaded to the minimum value. Rotate Rheostate R2 to the extreme clockwise position. Measure and record the voltage outputs

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

of the reticle projector and high voltage oscillator circuits. The regulated output voltages of these circuits shall conform to the values of Table V of 3.10.2.5.

4.6.7.3.5.3 Regulated output, 18 VDC input with maximum loads. - Energize the panel with 18 VDC and perform the test as specified in 4.6.7.3.5.2. The output voltage measured shall conform to the values of Table V, 3.10.2.5.

4.6.7.3.5.4 Regulated output 18 VDC input with maximum loads. - With the panel energized as specified in 4.6.7.3.5.3 increase the load on the reticle projector output to maximum. Measure the voltage output of the reticle projector supply at Pin E. The change of output voltage from the measurement of 4.6.7.3.5.3 shaLl be equal to or less than the maximum change specified in Table V of 3.10.2.5. Increase the load on the battery charging circuit to maximum. The measured output current value shall conform to Table V of 3.10.2.5. Increase the load on the high voltage oscillator circuit to maximum. The measured voltage output shall conform to the value in Table V of 3.10.2.5. Return the loads on the reticle projector, high voltage oscillator and battery charging circuit co minimum value.

4.6.7.3.5.5 Regulated output 30 VDC input with maximum loads. - Energize the panel with 30 VDC. Increase the load on the reticle projector output to maximum. Measure the voltage output of the reticle projector supply at Pin E. The change of output voltage from the measurement of 4.6.7.3.5.2 shall be equal to or less than the maximum change specified in Table V of 3.10.2.5. Increase the load on the high voltage oscillator circuit. The measured voltage output shall conform to the value in Table V of 3.10.2.5.

4.6.7.3.5.6 Regulated output, 6.2 VDC with maximum load. - Perform this test with Switch S1 in the Emergency Power "ON" position and +6.2 VDC applied from J1-E to Ground (+6.2 VDC at J1-E, -6.2 VDC at Ground); the Rheostat R2 in the extreme clockwise position and the reticle projector circuit loaded to maximum load (.600 amp); the high voltage oscillator circuit loaded to maximum load (.020 amp). Measure tha output voltage of the reticle projector and high voltage oscillator circuits. The regulated output voltage values in Table V of 3.10.2.5.

4.6.7.3.5.7 Regulated output, 6.2 VDC with minimum load. - Perform this test with Switch S1 in the emergency power-ON" position, and the 6.2 VDC applied as in 4.6.7.3.5.6; the Rheostat R2 in the extreme clockwise position and the reticle projector circuit loaded to minimum load (open circuit); the high voltage oscillator circuit loaded to minimum load (.010 amp). Measure the output voltage of the reticle projector and high voltage oscillator circuits. The regulated output voltage of these circuits shall conform to the applicable voltage values in Table V of 3.10.2.5.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.7.4 Operability of controls. - The controls shall be subjected to a visual and tactile examination to determine compliance with 3.10.3 at the temperatures specified.

4.6.8 Periscope Mount: 10513360.

4.6.8.1 Periscope mounting repeatability. - Perform this test utilizing the testing equipment specified in 4.5.2.3.1a and 4.5.2.3.1b. Install the periscope in the mount and establish a line of sight as in 4.6.2. Record the line of sight setting. Remove the periscope from the mount assembly. Repeated installation of the periscope, a minimum of three times, shall be performed. The periscope shall be inspected after each installation for line of sight retention. The mount assembly shall meet the requirements specified in 3.11.1, as measured on the viewing 'collimator micrometer knobs.

4.6.8.2 Periscope insertion and removal. - Perform this test in sequence to the test in 4.6.8.1. Repeated installation of the periscope into the mount assembly shall be accomplished a minimum of three times. Observe for any evidence of binding or interference at each installation. The mount shall meet the requirements specified in 3.11.2.

4.6.8.3 Operability of controls and wiper mechanism. - Perform the following tests with the mount assembled on a holding device that conforms to testing equipment specified in 4.5.2.3.1a and 4.5.2.3.1b, except that the target collimator is not required. The holding device shall accommodate the Panel Assembly 10549788 and Cable Assembly 8589783 together with a power source for energizing the panel assembly as required in 3.7f.

4.6.8.3.1 Periscope locking lever. - Install the body assembly of the periscope in the mount assembly, then remove the body assembly. Perform this test a minimum of three times. The Lever Assembly 8589900 shall conform to the requirements of 3.11.3.1 at the temperatures specified.

4.6.8.3.2 Shield actuating handle. - Manually operate the Handle 10542148 through its full range of travel. During this excursion the handle and shield shall conform to the requirements specified in 3.11.3.2 at the temperatures specified in 3.11.3.

4.6.8.3.3 Handle locking latch. - Perform this test concurrently with the test in 4.6.8.3.2. The handle locking latch shall conform to the requirements of 3.11.3.3 at the temperatures specified in 3.11.3.

4.6.8.3.4 Motor and linkage. - Position the wiper blade against the entrance window of the head assembly. Rotate the wiper knob on the panel assembly slowly in a clockwise direction to its stop, then slowly rotate the knob to its counter clockwise stop. During this rotation observe the function of the wiper blade. The motor and linkage shall conform to the requirements of 3.11.3.4.1 at the temperatures indicated in 3.11.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.8.3.5 Limit switch - wiper mechanism. - Perform this test in sequence to the test in 4.6.8.3.4. Position the wiper blade so that it is at the extreme opposite of the "O" position, and energize the wiper motor as specified in 3.11.3.4.2. Position the wiper blade so that it is approximately one half t-he distance between the "O" and extreme position, and energize the motor as specified. The wiper blade shall perform as specified in 3.11.3.4.2 when the motor is energized at the temperatures specified in 3.11.3.

4.6.8.4 Circuit breaker. - Perform this test in sequence to the test in 4.6.8.3.5. Energize the wiper motor. Secure the Shaft Assembly 10549773 for a maximum of 15 seconds. During this time the circuit breaker shall conform to the requirements specified in 3.11.3.4.3 at the temperatures in 3.11.3.

4.6.8.5 Sealing - mount assembly. - Perform this test with the mount assembled to a holding device that secures the mount as specified in 3.11.4. Position the shield in the raised position. Insert the head assembly into the mount and mask the interior cavity of the Mount Assembly 10513500 to prevent water penetration (vertical splash) into the area of the mount below the Gasket 10513302 during the rain test. All electrical or mechanical connections not utilized and which are normally protected in service, shall also be adequately sealed against moisture penetration. me mount shall then be subjected to the rain test in accordance with Procedure I of MIL-F-13926. Immediately following the specified exposure, the external surfaces of the mount and head assembly shall be dried by compressed air or blotting with water-absorbing material. Remove the mask from the interior cavity of the mount assembly and observe for any water penetration. Remove the head assembly and visually inspect the head assembly and interior surfaces of the mount assembly, below the Gasket 10513302, for evidence of water penetration. The mount assembly shall conform to the requirements of 3.11.4.

4.6.9 Linkage Assembly 8287301.

4.6.9.1 Orientation. - The following test shall be performed with the linkage assembly positioned in accordance with 3.13.1 on special test-ing equipment that conforms to the requirements of 4.5.2.3.3

4.6.9.1.1 Backlash. - With backlash removed for direction of travel, actuate the Connector 8635540 by means of the testing equipment until Surface "X" of Coupling 8620152 is positioned 22 degrees 30 minutes as shown on Drawing F8287301. Direct a line of sight through the viewing collimator to the reflecting (auto-collimating) surface of the mirror. While viewing through the collimator, adjust the mirror until the horizontal reticle line of the reflected image is superimposed on the horizontal reticle line of the viewing collimator. Record the position of the connector. Continue actuation of the connector in the same direction of travel until Surface "X" of the coupling is positioned, approximately 33 degrees, then actuate the connector in the opposite direction of travel

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the currentversion before use.

(with backlash included) until the connector is returned to the recorded lateral position without overtravel. Record the position of the boresight point of the reflected image, as measured on the viewing collimator. Any difference between the first and second recorded reading is the amount of backlash. Backlash shall not exceed the limit specified in 3.13.1.2.

NOTE: During this operation(4.6.9.l.1), if overtravel occurs the test shall be nullified and the procedure specified for backlash shall again be performed.

4.6.9.1.2 Operability. - Special testing equipment conforming to the requirements of 4.5.2.3.3.1 shall be utilized for this test. Position the linkage assembly as specified in 3.13.1 and 3.13.1.1, and attach the testing equipment to measure direct force, push or pull, to the spherical bearing on the free end of the linkage. Direct force shall be measured while actuating the connector, by means of the direct force tester, in the appropriate direction until Surface "X" of Coupling 8620152 is rotated through its travel range specified in 3.14.1.1. The direct force applied at the connector to rotate the coupling shall conform to the applicable requirements of 3.13.1.1 at the temperatures specified.

4.6.10 Tank, Periscope XM44E1 and XM44E2

4.6.10.1 Optical characteristics. - Position the periscope and mount on a holding device that permits the assemblies to be mounted as required in 12.1.1b. Unless otherwise specified, the image tube shall be removed from the periscope and the clear filter shall be positioned in the optical train. The test values for all characteristics shall be recorded and be made part of the inspection record.

NOTE: Unless otherwise specified the inspection of the periscope should be conducted in an atmosphere that is controlled for temperature, humidity, and contaminates that would adversely affect the head assembly or body assembly when separated from the periscope mount.

4.6.10.1.1 Contrast transfer on-axis, objective system. Perform this test using a 2870° ±100°K Kelvin (K) light source, diffuse screen, frequency pattern (see Figure 1), collimator, an S-20 extended red photo-detector with slit (see Figure 2), and an "X-Y" recorder set up and oriented as in Figure 3. Position the photo-detector in the tube cavity of the periscope utilizing an appropriate adapter. Focus the image of the frequency pattern at the slit. Adjust the "X-Y" recorder for zero level by blocking the entrance of all light to the photo-detector. Measurements shall be made at 5 frequencies in the image plane. Position the photo-detector on axis and advance the frequency pattern, in a horizontal direction, through the five frequencies at a constant rate such that no signal damping due to response time of the photo-detector occurs, and obtain recordings similar to that shown in Figure 4. Calculate the on-axis contrast transfer for vertical lines using the formula $\frac{W - B}{W + B}$ from measured data. Record the contrast transfer values for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

vertical lines. Rotate the frequency pattern and slit 90%. Measure, calculate, and record the on-axis contrast transfer values for the horizontal lines. Contrast transfer on-axis shall conform to the requirements specified in 3.12.1.2.1a.

NOTE: Special care must be taken before test data is made to avoid possible introduction of contrast transfer losses resulting from the instrument.

4.6.10.1.2 Contrast transfer off-axis, objective system. - Perform this test in sequence to the test in 4.6.10.1.1 utilizing the testing equipment and test method specified therein. Off-axis measurements shall be accomplished by translating the microscope objective and slit (Figure 2) perpendicular to the optical axis without refocusing. Measure, calculate, and record the off-axis contrast transfer values for the vertical lines with the microscope objective and slit translated off-axis to the left from on-axis. Translate the microscope objective and slit downward from on-axis and repeat the measurements, calculations, and recording for both vertical lines and horizontal lines. Contrast transfer off-axis values shall conform to the requirements specified in 3.12.l.2.lb (see 4.6.10.1.1 note).

4.6.10.1.3 Contrast transfer on and off-axis, eyepiece and erecting system. - Perform this test using a 2870° ± 100K light source, diffuse screen, frequency pattern (see Figure 1), collimator, an eye corrected photo-detector with slit (see Figure 5), and an "X-Y" recorder set up and oriented as in Figure 6. An appropriate adapter shall be utilized to position the photo-detector in the tube cavity of the periscope. Set the eyepiece of the periscope to zero diopters. Perform this test using the test methods and procedures specified in 4.6.10.1.1 and 4.6.10.1.2. Measure, calculate, and record the on-axis contrast transfer values for both vertical lines and horizontal lines. Measure, calculate, and record the off-axis contrast transfer values for the vertical lines with the microscope objective and slit translate off-axis to the right from on-axis. Translate the microscope objective and slit upward and repeat the measurements, calculations , and recording for both vertical lines and horizontal lines. Contrast transfer on-axis and off-axis shall conform to the applicable requirements specified in 3.12.1.2.2a and 3.12.1.2.2b (see 4.6.10.1.1 note).

4.6.10.1.4 Luminous transmittance of objective system - clear filter. - A diffuse surface with a luminance of not less than 100 foot Lamberts shall be positioned at the image plane of the objective system (image tube cavity) of the periscope. The light source shall be from a 2870° ± 100°K tungsten lamp (see Figure 12). The entire entrance pupil of the head assembly shall be scanned with an eye corrected photometer. The luminous transmittance of the image, measured at the entrance pupil at any point, shall be not less than the value specified in 3.12.1.3.1a. Percentage of transmission shall be defined as:

$$\frac{\text{Apparent luminance as seen thru periscope}}{\text{Luminance of target}} \times 100\%$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.10.1.5 Luminous transmittance at 0.85 micron of objective system-clear filter. - Perform this test in sequence to the test in 4.6.10.1.4. This test may be performed with either an image forming radiometer or an non-image forming radiometer used at a controlled distance. The radiometer shall be filtered for 0.85 micron. The filter utilized with the radiometer shall have a peak transmission of not less than 30% at 0.85 micron, and shall have a band width of +0.10 - 0.01 micron at 1/3 of peak. When an image forming radiometer (detector assembly) is used, the test may be performed in either direction, that is, with thelight source outside the periscope and the detector assembly in the tube cavity, or with the light source in the tube cavity and the detector assembly outside the periscope. In either case extreme care must be taken to assure that the detector assembly reads exactly the same angle when measuring the periscope objective system as when being calibrated at 100%. When an non-image forming detector is used in the tube cavity it must be capable of measuring all the energy which enters the periscope objective system and all the energy which reaches the tube cavity. The measured transmittance at 0.85 micron shall not be less that the value specified in 3.12.1.3.1b.

NOTE: A narrow band radiation source may be substituted for the 2870°K illuminance source in this test. The spectral response of the light source shall be equivalent to the spectral response of the filter.

4.6.10.1.6 Luminous transmittance - eyepiece and erecting system. - A diffuse surface with a luminance of not less than 100 foot lamberts shall be positioned in the object plane (image tube cavity) of the eye telescope. The luminance of the target as seen at the eyepiece of the periscope shall be not less than the value specified in 3.12.1.3.3 when measured with an eye corrected photometer.

4.6.10.1.7 Luminous transmittance - head assembly. - Conduct this test with the body assembly removed from the mount. A diffuse luminous source from 2870° ± 100°K tungsten shall be positioned at the exit aperture. The transmittance measurement shall be made with an eye corrected photometer while scanning the entrance aperture. The transmittance shall be not less than the value specified in 3.12.1.4a, as measured on the photometer. Compute the percentage of transmittance using the following:

$$\frac{\text{Luminance of source as seen through head}}{\text{Luminance of source}} \times 100\%$$

4.6.10.1.8 Resolution - head assembly. - Perform this test utilizing a resolution target and a telescope of at least 90 power with an entrance pupil of at least 7.0 inches. The resolution target shall be placed on a wall target or in a collimator, positioned incident to the entrance window, and shall represent the angular subtense for the seconds of arc specified. Construction of the resolution target shall conform to the USAF 1951 Resolution Pattern in accordance with MIL-STD-150. The target

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

shall be illuminated by diffuse light from a 2870° ± 100°K tungsten lamp. The resolution target shall have the detectable line structure and proper line count when observed, at one focus setting, through the telescope positioned at the exit aperature of the head assembly. Resolution shall meet the requirements of 3.12.1.4b.

4.6.10.1.9 Resolution on-axis - periscope objective assembly. - Conduct this test with the periscope oriented as in 3.7a. Position a resolution pattern on a reticle placed in the focal plane of the objective system of the periscope (image tube cavity). Construction of the resolution pattern reticle shall be as shown in Figure 7. Project the resoltuion pattern by diffuse light from a 2870° ± 100″K tungsten lamp. The resolution pattern shall have the detectable line structure and proper line count when observed through a telescope positioned at, and normal to, the entrance aperture of the head assembly (see Figure 8). The telescope shall conform to the telescope utilized in 4.6.10.1.8 Resolution on-axis shall meet the requirements of 3.12.1.5.1.

4.6.10.1.10 Resolution off-axis - periscope objective assembly. - Perform this test as specified in 4.6.10.1.9, except that the viewing telescope shall be rotated off-axis the required distance. Resolution off-axis shall meet the requirements of 3.12.1.5.2.

4.6.10.1.11 Objective T-number - on-axis. - Conduct this test with the periscope oriented as in 3.7a. The effective T-number will be determined by flooding the image plane of the periscope objective with a known luminosity and measuring the illumination of the projected image on a target placed in front of the periscope. A luminous source providing a diffuse luminosity of approximately 100 foot lamberts over a circular area 1.0 inch in diameter shall be positioned in the image tube cavity by means of a suitable adapter. A reticle shall be mounted between the luminous source and the objective lens and positioned to provide a sharply focused image at a distance of 10.0 feet from the entrance window of the head assembly. The reticle pattern shall be as indicated in Figure 11. Luminance measurements shall be made from a magnesium oxide target placed within the center cross mark of the reticle image at 10.0 feet. The objective T-number shall not exceed the value specified in 3.12.1.6.1.

4.6.10.1.12 Objective T-number - off-axis. - Perform this test as in 4.6.10.1.11. The objective T-number shall be measured at the 4 peripheral cross marks of the reticle image. The objective T-numbers shall not exceed the value specified in 3.12.1.6.2.

4.4.10.1.13 Resolution - unity power system. - The test for resolution shall be performed utilizing an auxiliary telescope conforming to the requirements of 3.12.1.7, and a resolving power chart on a wall target or positioned in a collimator. The resolving power target shall represent the angular subtense for the minutes of arc specified. Construction of the target shall conform to the USAF 1951 Resolution Pattern in accordance with MIL-STD-150. The target shall be illuminated by diffuse light from a 2870° ± 100°K

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

tungsten lamp. The target shall have the detectable line structure and proper line count when observed through the telescope positioned at the exit aperture of the unity power system. Resolution shall meet the requirements of 3.12.1.7.

4.6.10.2 Image intensifier tube, Government furnished. - Each Government furnished image tube shall be subjected to the following verification inspections:

4.6.10.2.1 Physical defects. - Prior to energizing the tube it shall be subjected to a visual and tactile examination. The tube shall show no evidence of physical defects as specified in 3.12.1.8.1.1. The image tube shall then be positioned on the testing equipment specified in 3.4.2.3.2 and energized. Visually examine the energized screen. The energized screen shall conform to the requirements of 3.12.1.8.1.1.

4.6.10.2.2 Voltage drop. - Position the image tube on the fixture specified in 4.5.2.3.2. Provisions shall be made on the fixture for the engagement and disengagement of the energized oscillator to the image intensifier tube. Energize the disengaged oscillator to the values specified. Engage the energized oscillator and image tube. The output Voltage drop of the oscillator shall not exceed the value specified in 3.12.1.8.1.2 as indicated on the monitor of the oscillator output voltage. The tube shall not evidence any audible or visible defect identified in 3.12.1.8.1.2.

4.6.10.2.3 Luminance gain, center resolution and image alinement. - The examination and tests for these characteristics shall be in accordance with MIL-I-55536. The image tube shall conform to the requirements of 3.12.1.8.3 through 3.12.1.8.5 inclusive.

4.6.10.3 Complete periscope with image tube installed. - Unless otherwise specified the following tests shall be conducted with the periscope and applicable equipment positioned as specified in 3.12.1.8 on an appropriate holding device.

4.6.10.3.1 Cleanliness, head assembly. - perform this test Prior to assembling the body assembly to the mount. The head assembly shall be visually examined through the entrance window and exit aperture with the unaided eye. Inspection for moisture shall be made by the technique of shadowing. Inspection for dirt or foreign particles shall be made by viewing a uniformly illuminated field having a brightness of approximately 300 apparent foot candles. Cleanliness of the head assembly shall conform to the requirements of 3.12.1.9.1.

4.6.10.3.2 Cleanliness of unity power system, body assembly. - Perform this test on the body assembly prior to its assembly to the mount. Position a diffuse light source at the entrance window, then visually inspect the unity power optical system through the exit window. Then position the light source at the exit window and visually inspect the optical system through the entrance window. The unity power system of the body assembly shall conform to the requirements of 3.12.1.9.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.10.3.3 Cleanliness of nine power system, tube installed. - Perform this test with the head assembly and body assembly assembled to the mount Present diffuse illumination-from a 2870° ± 100°K tungsten lamp to the entrance window of the head assembly. Position the periscope switch in the ON position and project the periscope reticle into the optical system. Visually inspect the nine power system through the periscope eyepiece. The nine power system shall conform to the requirements of 3.12.1.9.3a.

4.6.10.3.4 Cleanliness of nine power system, tube removed. - Perform this test with the head assembly and body assembly assembled to the mount, and the image tube removed from the body assembly. Position a diffuse white light source in the image tube cavity. Visually inspect the objective system through the head window, then the eyepiece system through the periscope eyepiece. The nine power system shall conform to the requirements of 3.12.1.9.3b.

4.6.10.3.5 Resolution - Nine Power system, on-axisa. - Perform this test using a projected or mechanical target. The effective range shall be not less than 40 feet. The radiance presented to the periscope shall have a color temperature of 2870° ± 100°K. The background luminance and contrast (high and low) of the target shall be as specified in 3.12.1.10. Construction of the target shall conform to the USAF 1951 Resolution Pattern in accordance with MIL-STD-150. Adjust the focus of the periscope. The resolution target shall have the detectable line structure and proper line count when observed through the eyepiece with the unaided eye. Resolution on-axis for high and low contrast shall meet the requirements specified in 3.12.1.10.

CAUTION: The image tube must be erased (completely discharged), and the observer dark adapted for not less than 15 minutes before performing the low contrast resolution tests.

4.6.10.3.6 Resolution - nine power system, off-axis. - Rotate the periscope off-axis 2.0 degrees and repeat the test specified in 4.6.10.3.5 Without changing the orientation of the focus knob from the position estabLished in that test. Resolution off-axis for high contrast shall meet the requirements specified in 3.12.1.10.

4.6.10.3.7 Contrast transfer - on-axis. - Perform this test using a 2870° ± 100°K tungsten light source, diffuse screen, frequency pattern (see Figure 1), collimator, eye corrected photo-detector with slit, and an "X-Y" recorder set up and oriented as in Figure 9. Illuminate the frequency pattern by means of a 2870° ± 100°K tungsten lamp and focus the image of the frequency pattern at the slit. Adjust the "X-Y" recorder for zero level and perform the test, as in 4.6.10.1.1, by advancing the frequency pattern through the three frequencies horizontally and then vertically as in 4.6.10.1.1. Calculate the contrast transfer using the formula $\frac{W - B}{W + B}$ from measured data. Compute the required contrast transfer

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

using the values in 3.12.1.11 and the values of U_T. Contrast transfer on-axis shall conform to the requirements of 3.12.1.11. Special care must be taken before test data is made to avoid the possible introduction of contrast transfer losses resulting from the test instrument.

4.6.10.3.8 Luminance gain. - Perform this test using a 2870° ± 100°K tungsten light source, a diffuser with mask, collimator, an eye corrected photo-detector with a 7.0 to 9.5mm entrance pupil, and a calibrated foot lambert meter set up and oriented as in Figure 10. The calibrated foot lambert meter shall be used to measure luminance gain by comparing the luminance seen by the periscope with the luminance at the periscope eye-piece. The light source collimator shall be calibrated to present to the periscope a uniform target luminance of 1.5 x 10.3 foot lamberts, with illumination from a 2870° ± 100°K tungsten lamp, subtending a solid angle of 4.5 degrees of periscope field of view centered on the optical axis. Engergize the periscope and measure the luminance at the eyepiece with an eye corrected brightness meter which has been calibrated for light from 2870° ± 100°K tungsten lamp and has an entrance pupil of between 7.0mm and 9.5mm. The gain is the ratio of the luminance at the eyepiece divided by the target luminance. The luminance gain shall be not less than the value specified in 3.12.1.12.

4.6.10.3.9 Stray light luminance. - Perform this test using a calibrated foot lambert meter, an eye corrected photo-detector, a 2870° ± 100°K tungsten light source, a surface of white surround conforming to 3.12.1.13, and a disk with a black surface luminance of less than 1 x 10^{-4} foot lamberts set up and oriented as in Figure 13. The instrument described above and in Figure 9 shall be used to measure the stray light luminance. The tungsten light source shall be so positioned as to provide a nearly uniform luminance of 5 times 10^{-3} foot lamberts over the surface of the white surround. The eye corrected photo-detector shall have an aperture of 7.0mm to 9.5mm. Adjust the periscope for infinity focus. Compare the eyepiece luminance with light source off and light source on. Any change in eyepiece luminance, in the measurements with the light source off and the light source on, shall not exceed the tolerance specified in 3.12.1.13.

4.6.10.3.10 Field of view. - Perform this test with the periscope positioned on a holding device which permits the periscope with appropriate equipment to be rotated in a horizontal plane. Project a cross-line test pattern onto the objective lens of the periscope by means of a diffuse 2870° ± 100°K tungsten lamp. The periscope shall then be pivoted either to the left or right until the center point of the test pattern seen through the periscope is at the edge of the field of view. The periscope shall then be pivoted in the opposite direction until the center point of the cross is at the opposite edge of the field of view. The total angle through which the periscope was pivoted shall be measured. The field of view of the periscope shall be not less than the value specified in 3.12.1.14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.10.3.11 Definition and visibility of projected reticle pattern, clear medium and dark filters. - Cover the entrance window of the head assembly and project the reticle pattern into the periscope optical system. The image of the reticle pattern shall conform to the requirements of 3.12.1.15.1 when the filter is rotated to the clear and medium positions. Rotate the filter co the dark position and remove the cover from the entrance window. The projected reticle pattern shall again conform to the requirements of 3.12.1.15.1 when diffuse illuminance from a 2870° ± 1000K tungsten lamp is presented to the entrance window of the head assembly. The diffuse illuminance shall conform to the requirements of 3.12.l.15.lb.

4.6.10.3.12 Reticle accuracy of projected reticle pattern. - The angular value between the boresight cross and maximum range graduation of the projected reticle pattern shall be tested utilizing a collimator reticle target. The target shall be projected by means of a diffuse 2870° ± 100°K tungsten lamp. The accuracy of the projected reticle pattern shall meet the requirements of 3.12.1.15.3.

4.6.10.3 Accuracy. - The following tests shall be conducted with the periscope and appropriate equipment positioned as specified in 3.12.2 on special testing equipment conforming to 4.5.2.3.1.5. The reticle pattern of the target collimator shall be projected by means of diffuse luminance from a 2870° ± 100°K tungsten lamp. Luminance shall not exceed 1×10^{-1} foot lamberts. Unless otherwise specified the tests for accuracies of the periscope shall be performed with the target image adjusted for infinity focus.

4.6.10.4.1 Flicker - image steadiness. - Project the reticle pattern into the optical train. Position an auxiliary telescope at the eyepiece of the periscope. The auxiliary telescope shall contain a cross-line reticle and be capable of focusing on the screen of the image tube. Observe through the auxiliary telescope and superimpose the horizontal and vertical reticle lines on the target image lines on the screen of the image tube. Observe the target image for a time period of not less than one minute. During this one minute time period there shall be no visible flicker or movement of the image as specified in 3.12.2.2. Image movement shall be determined by means of the target image with respect to the auxiliary telescope reticle pattern.

4.6.10.4.2 Sparking - image steadiness. - Perform this test subsequent to, and utilizing the procedure specified in 4.6.10.4.1. Observe the screen of the energized image tube for a time period of not less than one minute. During the one minute period of observation there shall be no visible or audio evidence of sparking or arcing, as specified in 3.12.2.3.

4.6.10.4.3 Collimation - elevation and deflection. - This test, and the tests specified in 4.6.10.4.10 through 4.6.10.4.14 shall be performed with the body assembly removed from the mount assembly. Position the calibrated penta prism in the reflected light path of the head assembly so that its incident surface lays in a plane that is parallel to Datum Plane

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

"A". The emergent surface of the prism shall lay in a plane that is parallel to Datum Plane “D”. Position the viewing collimator in line with the prism so that its optical axis is maintained parallel to Datum Plane "A", and perpendicular to Datum Plane “D”. The horizontal and vertical target image for this test shall be projected in white light. The horizontal and vertical reticle lines of the viewing collimator shall be superimposed on the target image lines prior to positioning the head assembly in the line of sight. Position and secure the head assembly in the holding device. Rotate the input coupling to the angular value specified in 3.12.2.4. Observe the target image through the viewing collimator. Any adjustment of the viewing collimator micrometer knobs to obtain coincidence of the collimator reticle lines and the target image lines is the amount of collimation error. Collimation of the head assembly shall meet the requirements of 3.12.2.4.1 and 3.12.2.4.2.

NOTE: Caution shall be exercised during all tests of the head assembly to prevent the input coupling from striking hard against the travel stops.

4.6.10.4.4 Image tilt - unity-power. - Position the input coupling as in 4.6.10.4.3. Position an auxiliary telescope containing a cross-line reticle pattern at the exit aperture of the unity-power system. Plumb the vertical reticle line of the telescope and superimpose the reticle line on the vertical target line image. The image of the vertical target line shall be parallel to the telescope vertical reticle line within the tolerance specified in 3.12.2.5.1, as measured on the target.

4.6.10.4.5 Image tilt -nine-power system. - Perform this test as in 4.6.10.4.4 utilizing the viewing collimator positioned at the periscope eyepiece. Image tilt of the nine-power system shall conform to the requirements of 3.12.2.5.2.

4.6.10.4.6 Parallelism of reticle and image. - Project the reticle pattern into the nine-power system. Remove the viewing collimator from the line of sight and position the input coupling as specified in 3.12.2f. Perform the test when one extremity of the indicated projected reticle line is coincident to the horizontal target line image. The reticle line shall be parallel to the target line within the tolerance specified in 3.12.2.6, as measured on the target.

4.6.10.4.7 Excursion range, boresight movement. - Establish coincidence of the reticle boresight point with the boresight mark of the projected target image by means of the azimuth and elevation boresight knobs. Rotate the azimuth knob to its clockise stop, and then rotate the elevation knob to its clockwise stop, then to its counterclockwise stop. Re-establish coincidence of the reticle boresight point with the boresight mark of the target image by means of the boresight knobs. Rotate the azimuth knob to its counterclockwise stop, and then rotate the elevation knob to its clockwise stop, then to its counterclockwise stop. These rotations of the azimuth and elevation knobs shall move the reticle boresight point the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

distance specified in 3.12.2.7.1, as measured on the target.

4.6.10.4.8 Reticle shift - azimuth and elevation boresight movement. - Establish coincidence of a horizontal reticle line with the horizontal target line image. Rotate the boresight knobs in each direction through their full excursion. During the rotation of the knobs the reticle boresight mark shall not deviate in a direction perpendicular to the intended movement more than the tolerance specified in 3.12.2.7.2.

4.6.10.4.9 Backlish - azimuth and elevation boresight movement. - With backlash excluded for the direction of travel, establish coincidence of the reticle boresight point with the boresight mark of the projected target image. Record the position of the boresight knobs. Rotate the knobs to their clockwise stops, then with backlash included, re-establish coincidence of the boresight point and boresight mark without overtravel. Record the position of the boresight knobs. Any difference between the two recorded readings is the amount of backlash. Backlash shall not exceed the tolerance specified in 3.12.2.7.3 as measured on the knob scales. Should overtravel occur during the rotation of the boresight knobs, the test is nullified. When overtravel occurs the test for backlash shall be repeated.

4.6.10.4.10 Elevation accuracy. - Perform this test in sequence to the test in 4.6.10.4.3. The auto-collimating device specified in 4.5.2.3.1.5.1 in conjunction with the penta prism and viewing 'collimator shall be utilized in this test. The mirror shall be auto-collimated to the viewing collimator when Surface "C" of the input coupling of the head assembly is positioned 67 degrees 30 minutes with respect to Datum Plane "A". The reflecting (auto-collimating) surface of the mirror shall lay in a plane parallel to Datum Plane "D" and a vertical center line passing through the geometric axis of the shaft of the input coupling adapter. The auto-collimating surface of the mirror shall also remain parallel to the vertical center of the input coupling adapter during rotation through its full excursion of travel. Auto-collimation of the mirror and the viewing collimator shall be accomplished with the head assembly removed from the line of sight. Position and secure the bad assembly in the holding device with the auto-collimating device affixed and oriented on the input coupling of the head assembly. With backlash removed for travel in elevations position Surface "C" of the input coupling so that the line of sight is deflected 18 degrees below the horizontal plane. Direct a line of sight through the viewing collimator and note the position of its reticle lines with respect to the reflected reticle lines. While observing the intersecting point (boresight point) of the vertical and horizontal reticle lines of the real and reflected image rotate Surface "C" of the input coupling, with respect to Datum Plane "A", so that the line of sight is deflected from 18 degrees below the horizontal plane to 22 degrees above the horizontal plane. During this rotation of the input coupling the reflected reticle image shall not deviate from the real reticle image beyond the tolerance specified in 3.12.2.10, as measured on the viewing collimator.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.10.4.11 Input coupling - excursion range. - Perform this test in conjunction with the test in 4.6.10.4.10. Rotation of the input coupling shall conform to the requirements of 3.12.2.8.1.

4.6.10.4.12 Plumb travel. - Perform this test in sequence to the test in 4.6.10.4.10. Position Surface "C" of the input coupling at 67 degrees 30 minutes with respect to Datum Plane "A". While observing the boresight point of the real and reflected image rotate Surface "C" of the input coupling the maximum elevation, then to maximum depression. During this rotation, the reflected image shall not deviate in azimuth from the real image beyond the tolerance specified in 3.12.2.9.

4.6.10.4.13 Backlash - input coupling. - Perform this test in sequence with 4.6.10.4.12. With backlash removed for direction of travel, position Surface "C" of the input coupling at 67 degrees 30 minutes with respect to Datum Plane "A". Record the position of the boresight point of the reflected image, as measured on the viewing collimator. Rotate Surface "C" of the input coupling approximately 10° in the same direction of travel, then reverse rotation of the input coupling (with backlash included) until Surface "C" of the input coupling is repositioned 67 degrees 30 minutes with respect to Datum Plane "A", without overtravel. Record this position of the boresight point of the reflected image, as measured on the viewing collimator. Any difference between the recorded readings is the amount of backlash. Backlash shall not exceed the limit specified in 3.12.2.11.

NOTE: During this operation (4.6.10.4-13) if overtravel occurs, the test shall be nullified and procedure specified for backlash shall again be performed.

4.6.10.4.14 Input coupling travel. - Rotation of the input coupling through its full excursion of travel shall be subjected to a tactile examination while observing the input coupling and the travel stop. Coupling travel shall conform to the requirements of 3.12.2.8.2.

NOTE: Upon completion of the tests in 4.6.10.4.3 and 4.6.10.4.10 through 4.6.10.4.14, the body assembly shall be reassembled to the mount assembly for the remaining periscope tests.

4.6.10.4.15 Zero setting of diopter scale. - A calibrated dioptometer shall be utilized for measuring the accuracy of zero diopter setting of the diopter knob. Set the dioptometer diopter scale to zero, and adjust the dioptometer eyepiece for best focus of the dioptometer reticle. Set the diopter knob of the body assembly to indicate zero ciiopter. Position the dioptometer at the eyepiece. While viewing through the dioptometer, obtain best focus of the phosphor grain on the screen of the image tube by adjustment of the diopter knob. The phosphor grain on the screen of the image tube shall be in best focus Within the tolerance specified in 3.12.2.12.1, as measured on the scale of the diopter knob. Rotation of the diopter knob to measure the accuracy of the zero setting of the diopter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

scale shall be made with backlash removed for direction of travel.

4.6.10.4.16 Excursion range - diopter movement. - Perform this test utilizing the dioptometer specified in 4.6.10.4.15. Position the periscope diopter knob to the zero setting established in 4.6.10.4.15, with backlash removed for direction of travel. Set the dioptometer diopter scale to -3.5 diopters and add or subtract, as applicable, the zero setting value obtained in 4.6.10.4.15 to the -3.5 diopter, e.g.; should the zero diopter setting of the knob be -0.25 the dioptometer diopter scale shall be set to -3.75 diopters; should the zero diopter setting of the knob be +0.125 the dioptometer diopter scale shall be set to -3.375 diopters. With the dioptometer diopter scale set to the calculated minus diopter value, position the dioptometer at the eyepiece of the periscope. While observing the screen of the image tube, through the dioptometer, slowly rotate the periscope diopter knob to its minus rotational stop. At one position of the knob, during this rotation of the diopter knob through the minus diopter adjustment range, the phospor grain of the image tube shall be in best focus. Reposition the diopter knob to its established zero setting with backlash removed for direction of travel. Set the dioptometer diopter scale to the calculated plus diopter value, and position the dioptometer at the eyepiece of the periscope. Measure the plus diopter movement excursion range be using the above procedure. The excursion range of the diopter movement shall conform to the requirements of 3.12.2.12.2.

4.6.10.4.17 Backlash - diopter movement. - Perform this test utilizing the dioptometer specified in 4.6.10.4.15. The dioptometer shall be zeroed and adjusted as specified therein. Starting from the stop position, rotate the periscope diopter knob clockwise to the “O” position without reversing direction of rotation. Position the dioptometer at the periscope eyepiece and obtain best focus of the target image by adjustment of the dioptometer diopter scale. Record the dioptometer scale reading. Rotate the periscope diopter knob clockwise to its stop position, then return it counterclockwise to the “O” position without overtravel. Again obtain best focus of the target image by adjustment of the dioptometer diopter scale. The difference between the first and second dioptometer diopter scale readings shall not exceed the value specified in 3.12.2.12.3.

4.6.10.4.18 Focus range. - The test for short range focus requirements of the periscope shall be performed with the target image adjusted to a focus of 40 feet. With the diopter knob positioned for best focus of the phosphor grain on the screen of the image tube, rotate the focus knob of the periscope to the short range setting. The periscope shall conform to the requirements specified in 3.12.2.13.1. The test for infinity (long range) requirements of the periscope shall be performed with the target image adjusted for infinity focus. Rotate the focusing knob to the infinity setting, the periscope shall conform to the requirements specified in 3.12.2.13.1. The periscope shall then be subjected to the test specified in 4.6.10.4.19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

4.6.10.4.19 Image shift due to range focus knob. - Adjust the target image for a focus of 1500 meters. With the diopter knob positioned for best focus of the phosphor grain on the screen of the image tube, rotate the focus knob of the periscope and obtain best focus of the target image. Remove the projected reticle pattern of the periscope from the field of view. Position an auxiliary telescope that contains a crossline reticle at the eyepiece of the periscope. Adjust the telescope to obtain coincidence of horizontal and vertical lines of the auxiliary telescope and target image. While observing the target image through the auxiliary telescope, rotate the range focus knob through the clockwise and counterclockwise revolution value specified in 3.12.2.13.2. During this rotation of the focus knob the target image shall not shift in excess of the tolerance specified in 3.12.2.13.2. Image shift shall be measured on the target with reference to horizontal and vertical reticle lines of the auxiliary telescope. Adjust the target image for a focus of 200 meters. Rotate the focus knob of the periscope and obtain best focus of the target image, then repeat the test for image shift as specified for 1500 meters. Image shift resulting from rotation of the range-focus knob, at 1500 meters and 200 meters, shall not exceed the tolerance specified in 3.12.2.13.2.

4.6.10.4.20 Focus - effect on diopter setting. - Adjust the periscope diopter knob for best focus of the phosphor grain on the screen of the image tube. Record the diopter scale reading. Rotate the focusing knob through the range specified in 3.12.2.13. Any adjustment of the dipter knob to obtain best focus of the target image, due to rotation of the focusing knob, shall not exceed the tolerance specified in 3.12.2.13.3 as measured on the diopter scale.

4.6.10.4.21 Image centering. - Position Surface "C" of the input coupling 66 degrees with respect to Datum Plane "A". Project a horizontal and vertical crossline image into the nine power system of the periscope. The target image lines shall extend beyond the applicable edge of the field of view of the periscope under test. The target image lines shall also contain graduations in increments of 5.0 mil. Remove the projected reticle pattern of the periscope from the field of view. Observe the target image through the eyepiece of the periscope. The target image shall appear centered in the field of view of the periscope, such that any difference between the number of mils, on the target image, measured at the edge of the field does not exceed twice the mil value specified in 3.12.2.13.4 in both the horizontal and vertical direction.

4.6.10.5 Operability - disengagement of knob locks. - The direct force required to disengage the diopter knob and each boresight knob shall be measured with standard measuring equipment. The measured force shall be not less than or exceed the limits specified in 3.12.3.1 for the temperature indicated.

4.6.10.6 Operability - torque. - The torque required to rotate the input coupling, boresight knobs, diopter knob, and focusing knob shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

be measured with standard measuring equipment affixed to the coupling and knobs. The measured torque shall be within the values specified in 3.12.3.2 at the temperatures indicated. The boresight slip scales and filter lever shall be subjected to a tactile examination and shall conform to the requirements specified in 3.12.3.2 at the temperatures indicated.

4.6.10.7 Operability - panel assembly controls. - The image tube, reticle pattern and panel assembly lamps shall conform to the requirements of 3.12.3.3 at each temperature indicated-in 3.12.3, when the applicable panel assembly control is actuated as specified.

4.6.10.8 Sealing - assembled periscope. - Assembly the periscope as specified in 3.12.4a. The internal pressurizing of the assembled periscope to test sealing shall be performed with special testing equipment conforming to 4.5.2.3.4. Secure the poppet in Valve 10516717 in a closed position. Then pressurize the periscope with clean dry air, to the value. specified in 3.12.4a, in accordance with the procedure for internal pressure testing on Sheet 1 of Drawing F8565556. Retain the applied pressure in the periscope for a minimum of 45 minutes. Within the first 30 minutes of this 45 minute time period, the boresight knobs, diopter knob, focus knob, and input coupling shall be rotated through a minimum of 3 full excursions of their rotational range. At the end of the 45 minute period there shall be no evidence of leakage, as indicated on the pressure gauge of the testing equipment, to determine compliance with 3.12.4a. Upon completion of test release the poppet in the Valve 10516717.

4.6.10.9 Sealing - head and body assemblies with shipping cover installed. - Performing this test in sequence to the test in 4.6.10.8, utilizing special testing equipment conforming to 4.5.2.3.5. Install the shipping cover on the head assembly and secure the poppet in Valve 10516717 in a closed position. Pressure shall be applied to the head assembly through the valve provided in the shipping cover. Install the shipping cover on the body assembly. Pressurize the head and body assemblies with dry nitrogen gas to the value specified in 3.12.4b, in accordance with the procedure for internal pressure testing on Sheet 1 of Drawing F8565556. The dry nitrogen gas shall have a dew point at least as low as minus 25°F. Retain the applied pressure in the head and body assemblies for a minimum of 45 minutes. At the end of the 45 minute time period there shall be no evidence of leakage as indicated on the pressure gauge of the testing equipment. Upon.completion of this test release the poppet in Valve 10516717.

4.6.10.10 Flushing. - The special testing equipment specified in 4.6.10.9 shall be utilized in this test. A dew point tester, with appropriate adapters, shall be used to test the dew point of the interior atmosphere of the head assembly and body assembly. Upon successful compltion of the sealing test of the periscope, the head assembly and body assembly shall be removed from its mount. Install the shipping covers on the head assembly and body assembly. The head assembly and body assembly shall then be flushed with dry nitrogen gas. The flushing shall continue until the nitrogen gas bled from the head assembly and body assembly

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:53Z
Check the source to verify that this is the currentversion before use.

has a dew point at least as low-as minus 25°F as measured with the dew point tester. The head assembly and body assembly shall then be sealed. The internal pressure of dry nitrogen gas in the head assembly and body assembly shall be raised to a measured 3 psi + 0.5 psi. The internal pressure of the head and body assemblies shall be monitored for a period of 5 minutes ± 15 seconds. At the end of the 5 minute period there shall be no evidence of leakage in the head assembly or body assembly as indicated on the pressure gauge of the testing equipment. The head assembly and body assemblies shall then be subjected to the applicable test specified in 4.6.10.11, 4.6.10.12 and 4.6.10.13.

4.6.10.11 Cleanliness-head assembly. - Perform this test in accordance with the requirements of 3.12.6.1. The accepted head assembly, with shipping covers installed, shall conform to the cleanliness requirements of 3.12.6.1."

4.6.10.12 Cleanliness, body assembly-nine power system. - Energize the image tube and reticle pattern of the body assembly and obtain best focus of the image screen and reticle pattern. While viewing through the eyepiece for evidence of dirt or foreign matter rotate the diopter knob to each stop (cw and ccw), then rotate the focus knob to each stop (cw and ccw). The nine power optical system of the body assembly shall meet the cleanliness requirements of 3.12.6.3. Any dirt particle that interferes with the legibility of the reticle pattern shall be cause for rejection of the body assembly.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with the applicable Packaging Data Sheet listed in Section 2. The level of protection shall be as specified in the procure-ment documen.

6. NOTES

6.1 Intended use. - The Tank Periscope XM44E1 andXM44E2 with associated equipment is intended for use as the gunner's sighting and observation system in the Armored Reconnaissance Airborne Assault Vehicle M551.

6.2 Ordering data. - Procurement documents should specify:


a. Title, date and number of this specification.
b. Applicable packaging data sheet number.
c. Selection of applicable levels of preservation, and packing.
d. Provisions for First Article testing.

Custodian:
Army - MU

Preparing activity:
Army - MU

Project No. 1240-A191

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

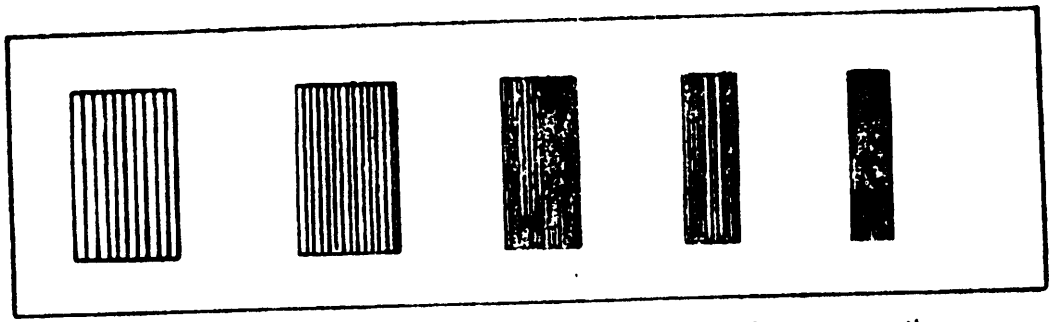


EACH TARGET GROUP WILL HAVE NOT LESS THAN 7 LINE PAIRS OF A PATTERN WHICH WILL GIVE THE INDICATED ANGULAR SUBTENSE

"A": 0.58 LINE PAIR/MILLI-RADIAN - 2.5 L.P./MM AT P.C. OF IMAGE INTENSIFIER.
"B": 1.73 LINE PAIR/MILLI-RADIAN - 7.5 L.P./MM AT P.C. OF IMAGE INTENSIFIER.
"C": 4.62 LINE PAIR/MILLI-RADIAN - 20 L.P./MM AT P.C. OF IMAGE INTENSIFIER.
"D": 6.92 LINE PAIR/MILLI-RADIAN - 30 L.P./MM AT P.C. OF IMAGE INTENSIFIER.
"E": 9.23 LINE PAIR/MILLI-RADIAN - 40 L.P./MM AT P.C. OF IMAGE INTENSIFIER.

FREQUENCY PATTERN - CONTRAST TRANSFER

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

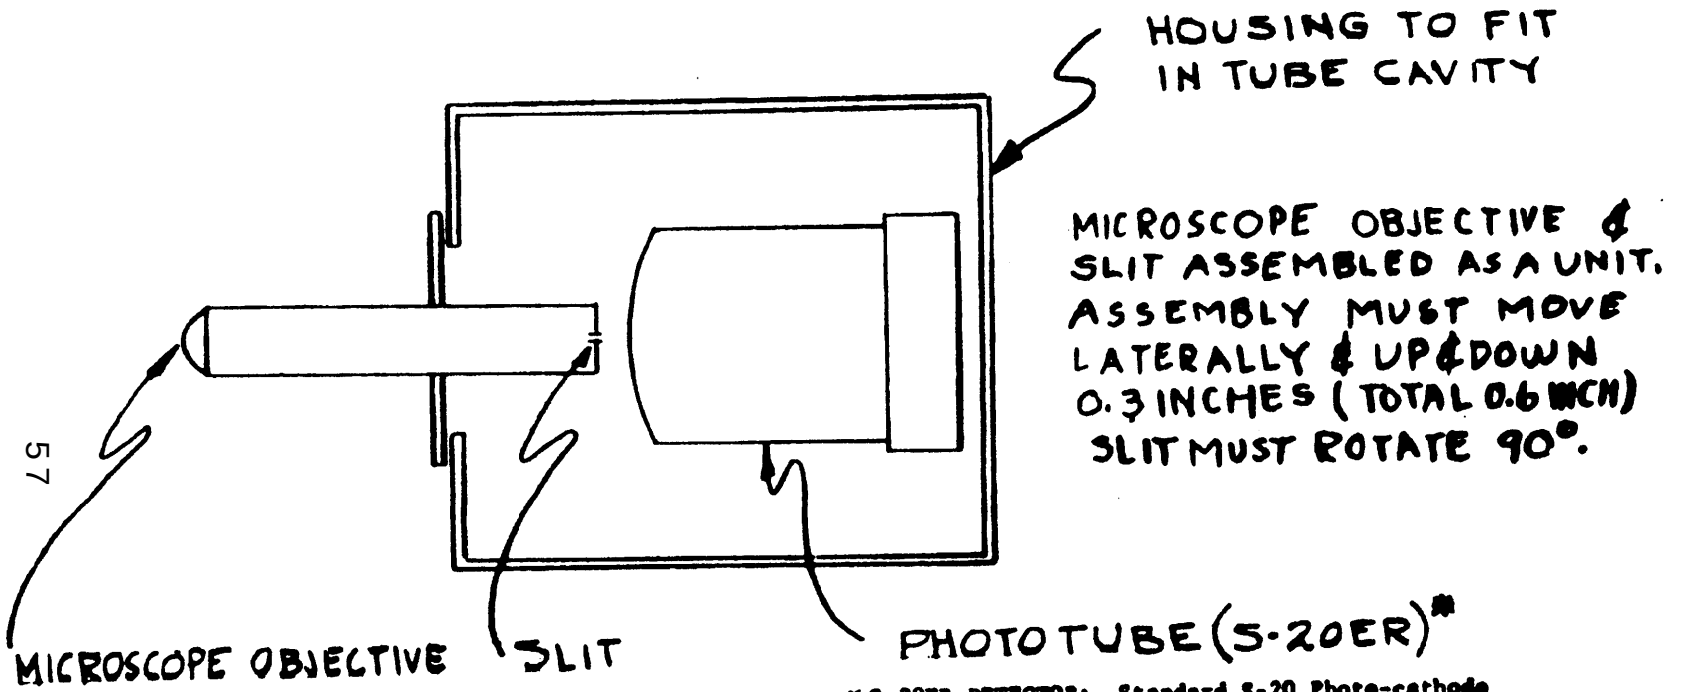


S-20ER DETECTOR AND SLIT

FIGURE 2

S-20ER DETECTOR: Standard S-20 Photo-cathode response extended at the red end so that the sensitivity at 0.8 micron and at 0.85 are 85% of the minimum values in the Purchase Description for the Image Intensifier Tube.


Source: https://assist.dla.mil -- Downloaded: 202610-23T00:53Z
Check the source to verify that this is the current version before use.

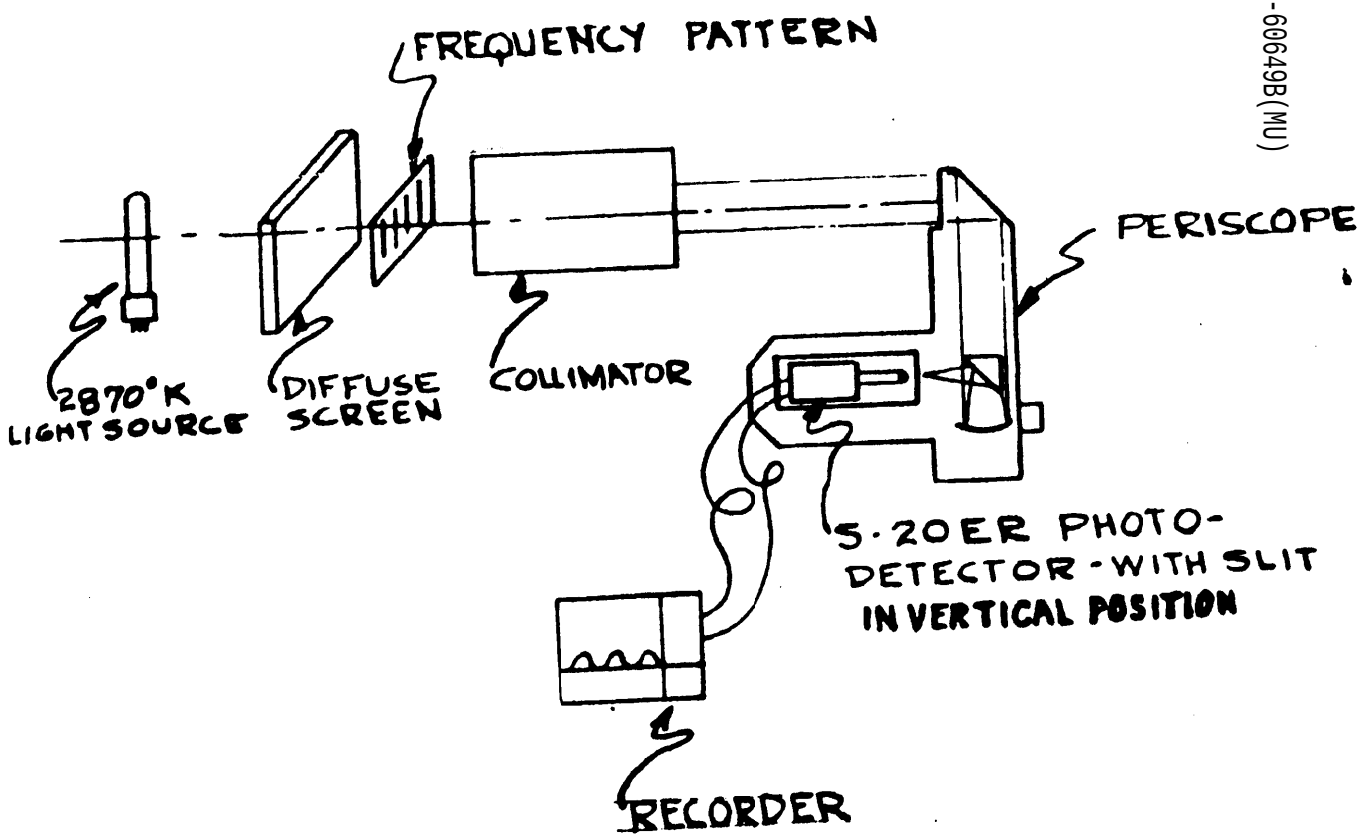

CONTRAST TRANSFER
PERISCOPE OBJECTIVE

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:53Z
Check the source to verify that this is the current version before use.

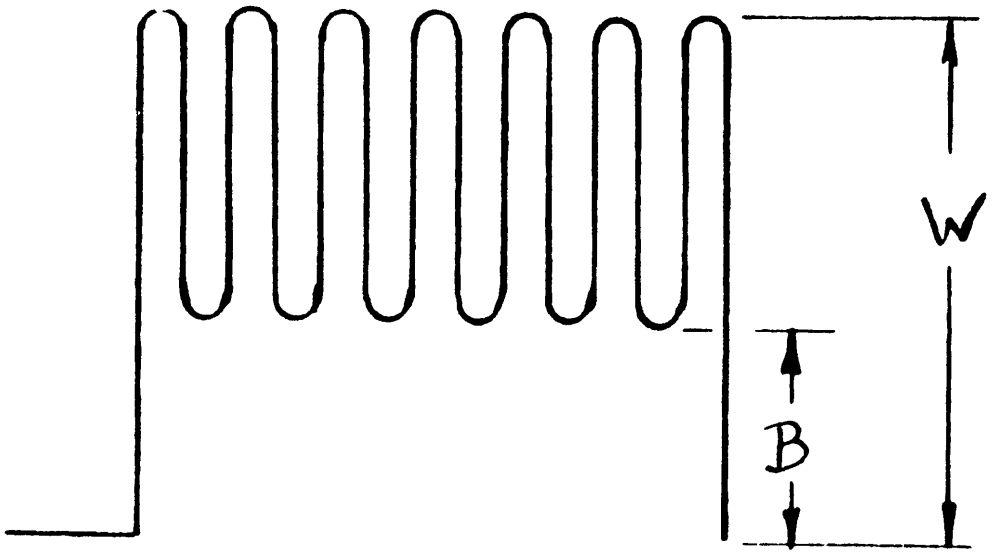


NOTE: CONTRAST TRANSFER IS DEFINED AS $\frac{W-B}{W+B}$

CONTRAST TRANSFER WAVE FORM

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

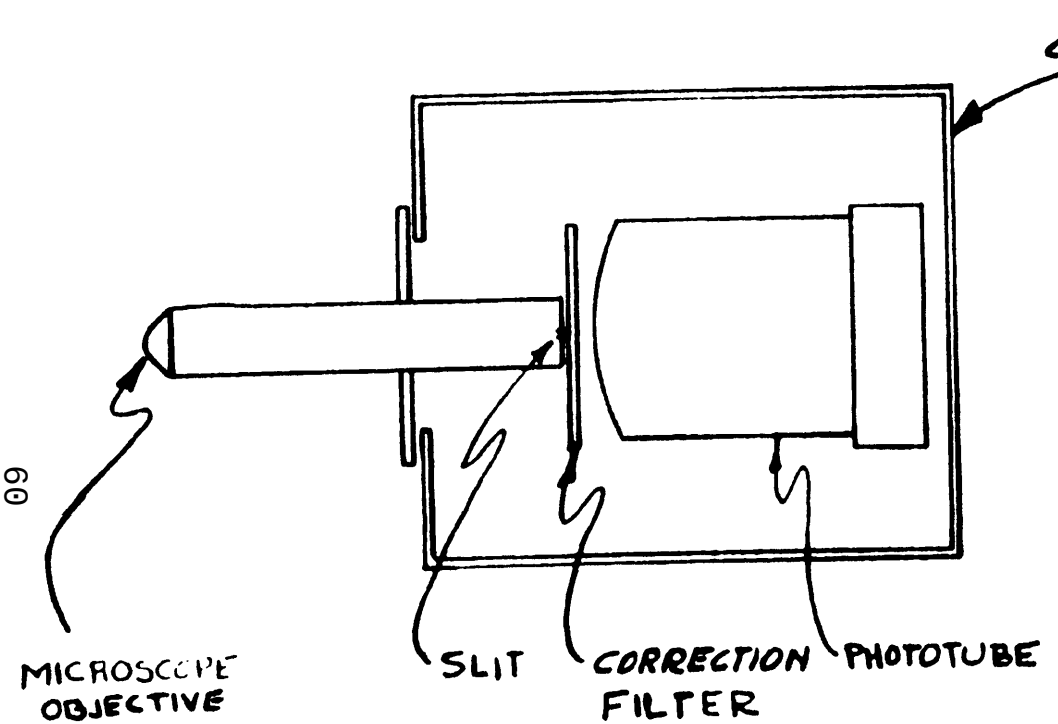


MICROSCOPE OBJECTIVE & SLIT ASSEMBLED AS A UNIT. ASSEMBLY MUST MOVE LATERALLY & UP & DOWN 0.3 INCHES (TOTAL 0.6 INCH) SLIT MUST ROTATE 90°.

CORRECTION FILTER WILL CHANGE TUBE RESPONSE TO STANDARD VISIBILITY FUNCTION (V_2).

EYE-CORRECTED DETECTOR AND SLIT

FIGURE 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

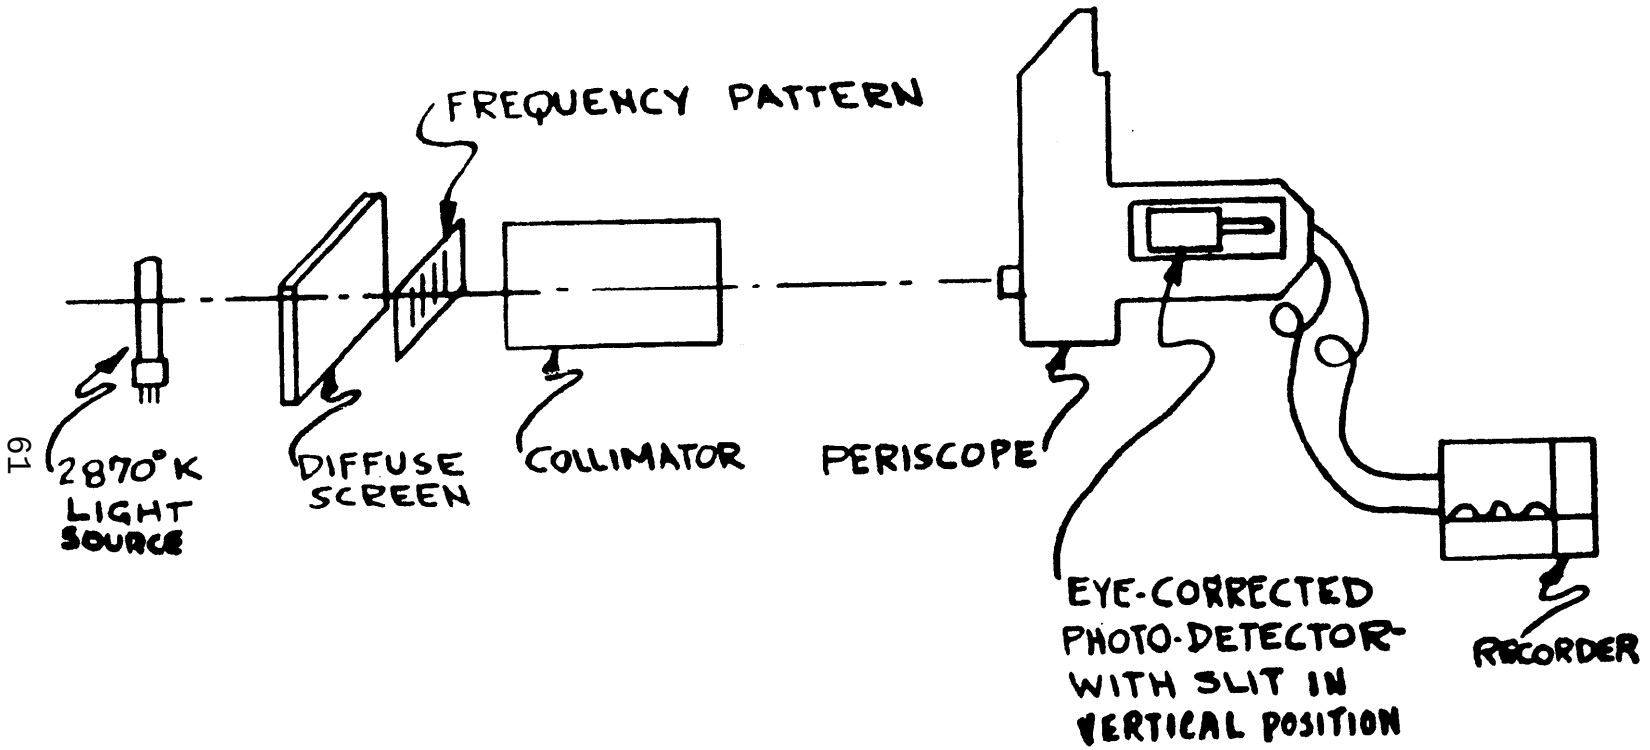

CONTRAST TRANSFER
PERISCOPE EYEPIECE

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

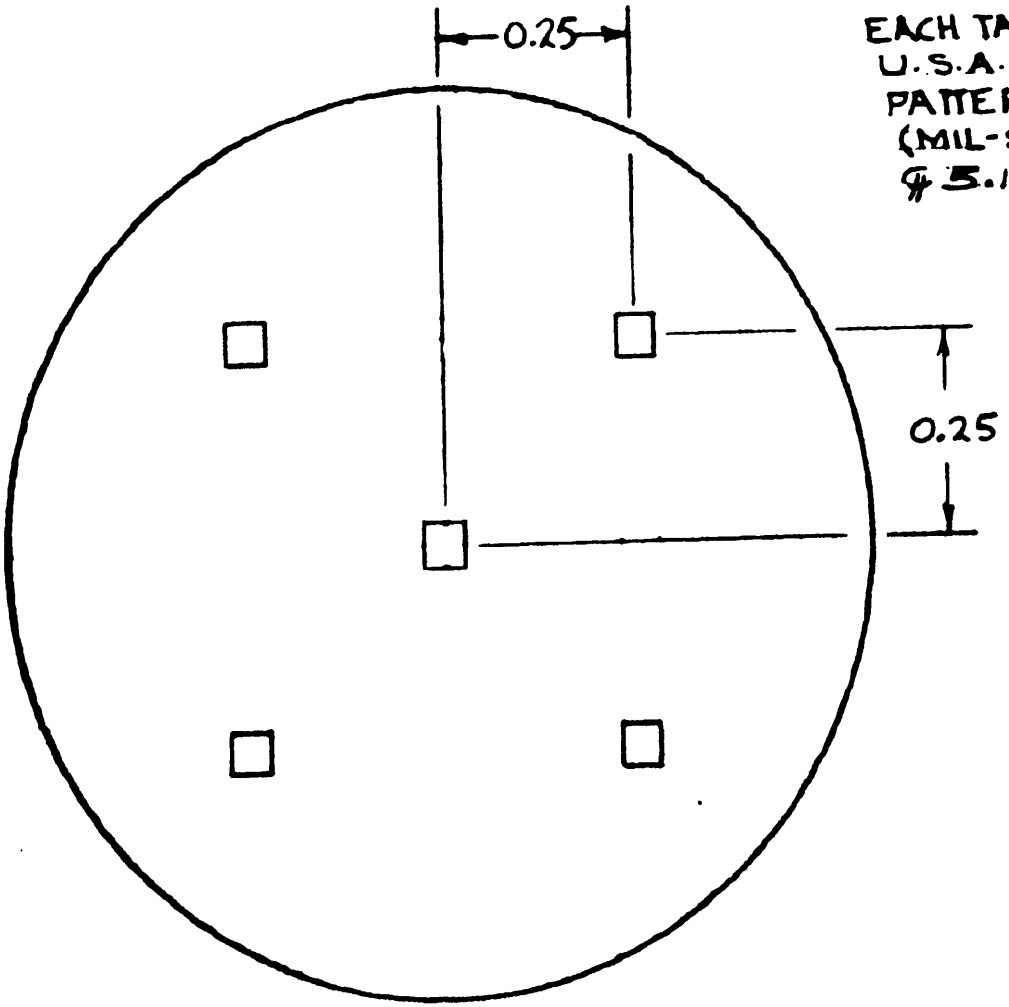


EACH TARGET TO BE A U.S.A.F. 1951 RESOLUTION PATTERN UP TO 228 L.P./MM (MIL-STD-150, 12 MAY 1959) # 5.1.1.7

RETICLE PATTERN FOR OBJECTIVE RESOLUTION TEST

FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

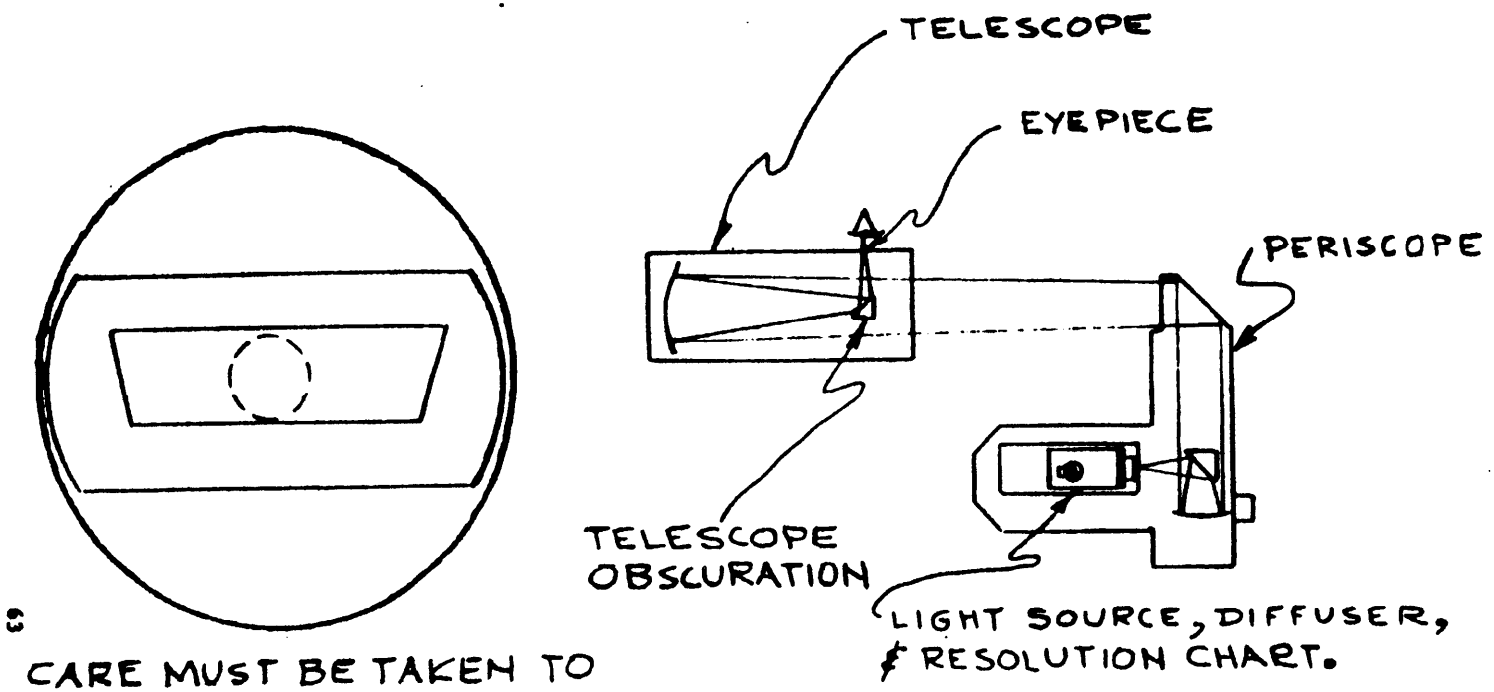


MIL-P-60649(MI)

RESOLUTION OBJECTIVE ASSEMBLY

FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

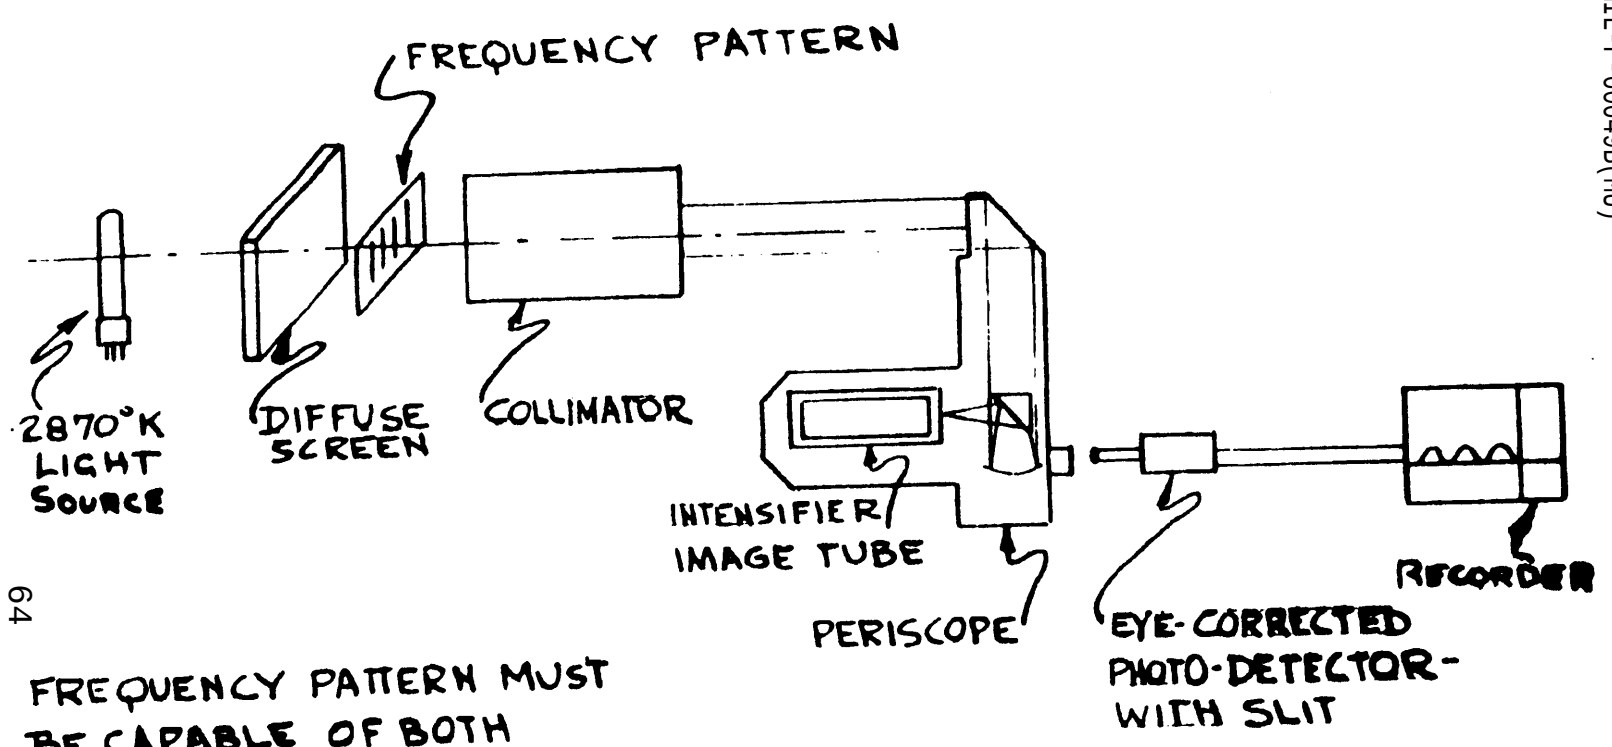


CONTRAST TRANSFER

COMPLETE PERISCOPE

FIGURE 9


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

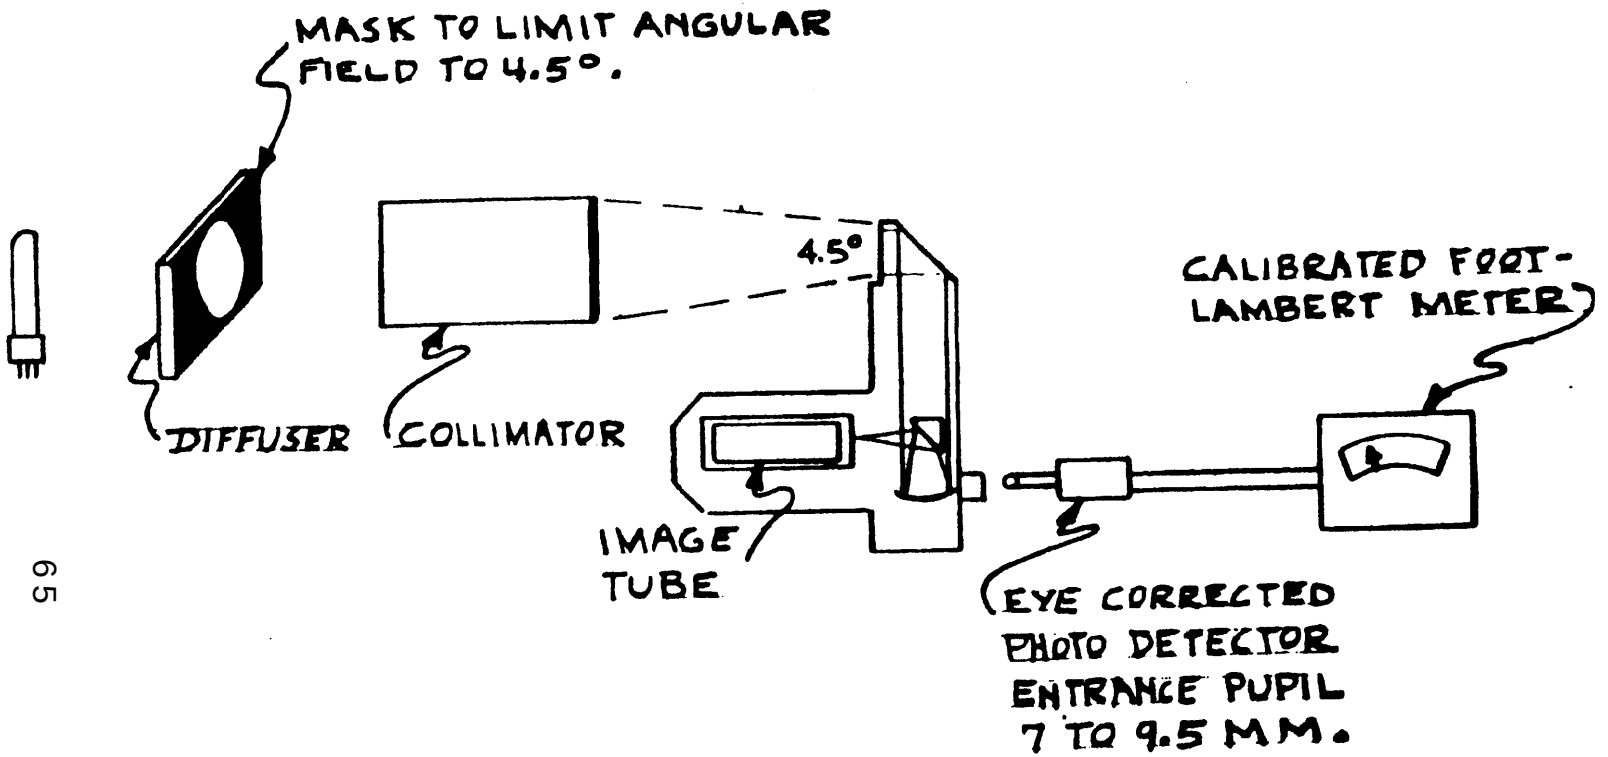

LUMINANCE GAIN


FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

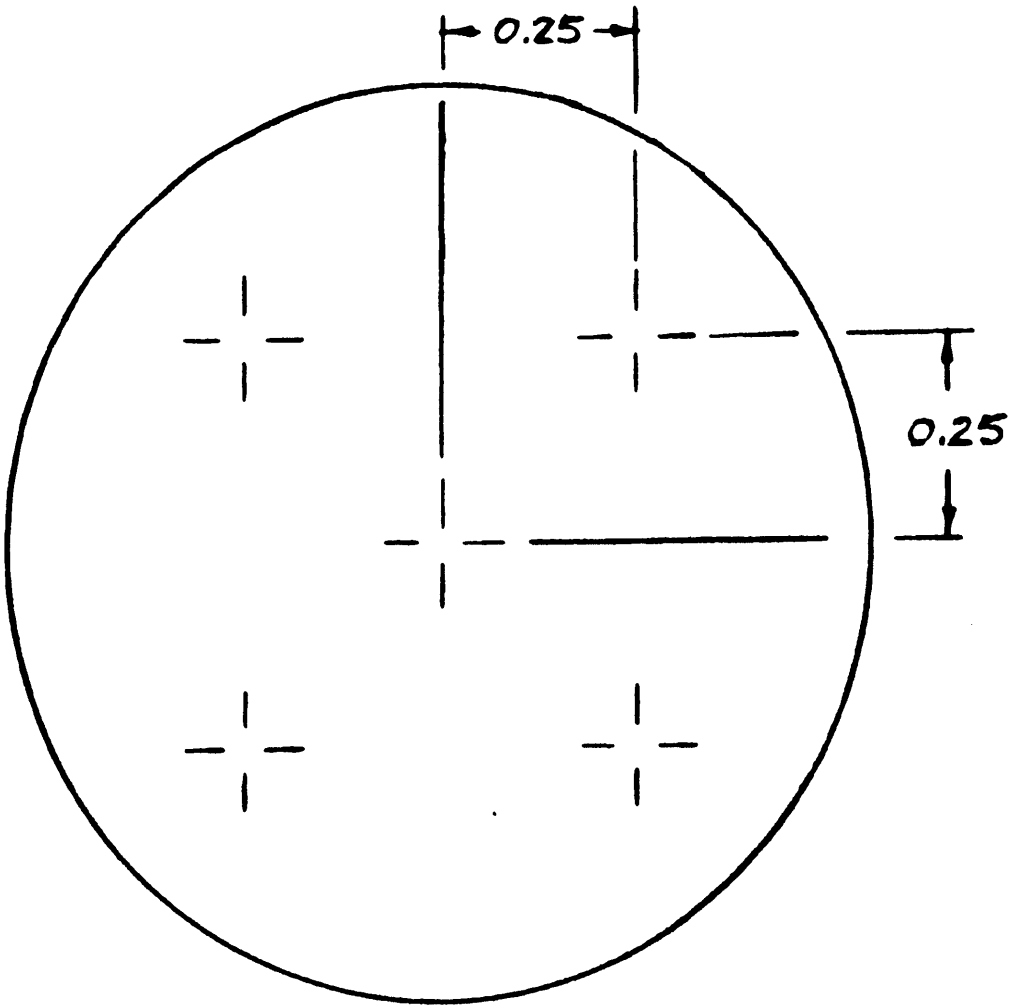


RETICLE PATTERN
FOR
T/# TEST
FIGURE 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

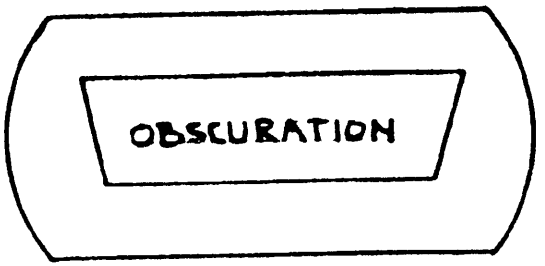

PERISCOPE ENTRANCE PUPIL AS SEEN FROM IN FRONT OF HEAD.

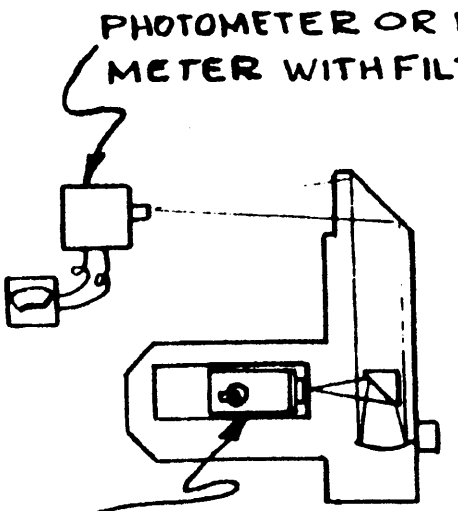


LIGHT SOURCE, DIFFUSER, & RETICLE ASSEMBLY, PLACED IN TUBE CAVITY.

OBJECTIVE TRANSMISSION, VISIBLE & I.R.

FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

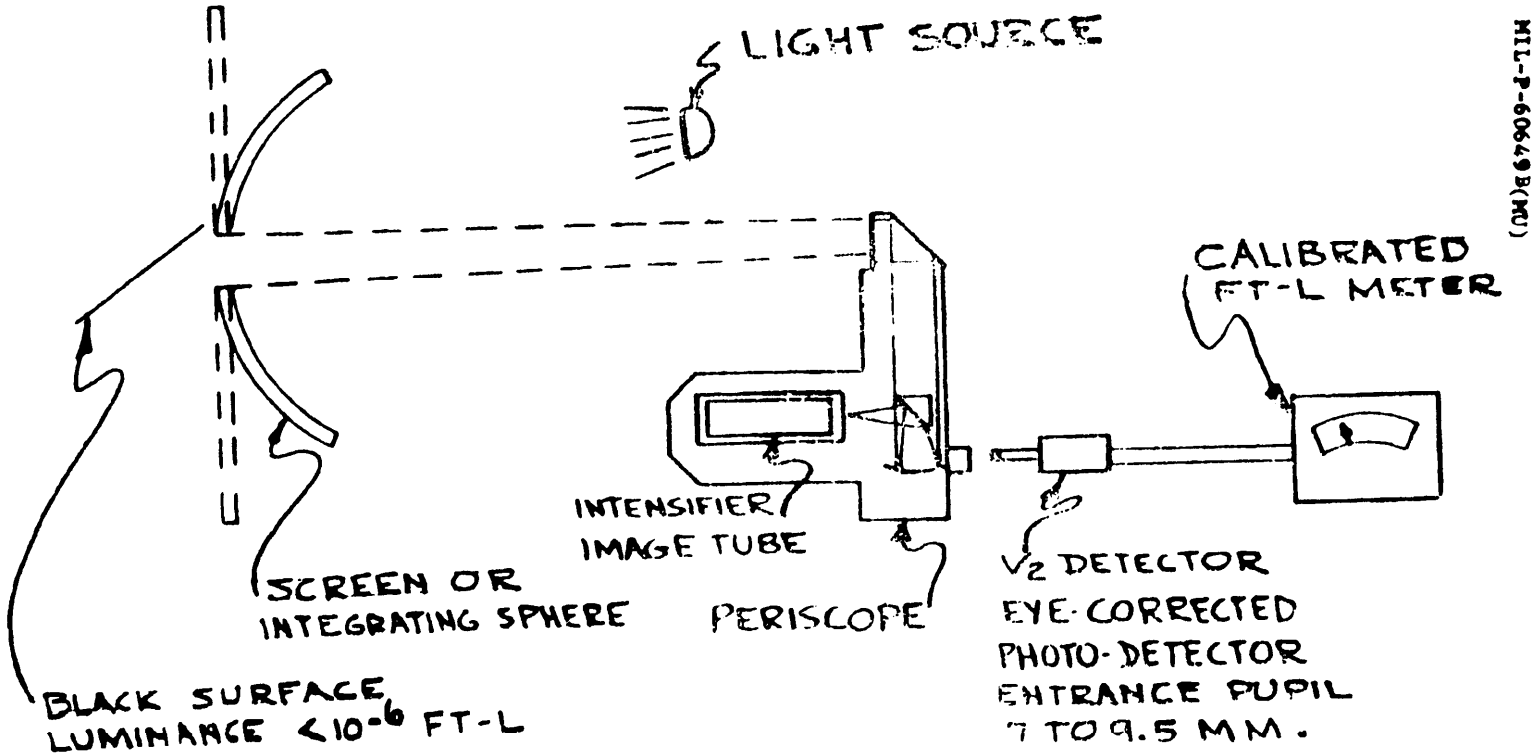

MIL-P-6064B(MD)

STRAY-LIGHT MEASUREMENT

FIGURE 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

YES NO (If "yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

5. SUBMITTED BY (Printed or typed name and activity - Optional)

DATE

DD FORM 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:53Z
Check the source to verify that this is the current version before use.