MIL-P-62211B(AR)
30 June 1981
SUPERSEDING
MIL-P-62211A(AR)
1 March 1976

MILITARY SPECIFICATIN

POWER SUPPLY LOW VOLTAGE 11746916

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirement and quality assurance provisions for the Power Supply Low Voltage: 11746916 which the A2A1 component of the Electronic Unit, 11743131.

2. APPLICATION DOCUMENTS

2.1. Issues of documents. The following documents of the issue in effect on date of invitation for bids or requiret for proposal, for aprt of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-F-13926	Fire Control Material: General specification Governing the Manufuture and Inspection of
MIL-I-45607	Inspection Equipment: Acquisition, Maintenance and Disposition of
MIL-STD-45662	calibration System Requirements

FSC 1240

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sapling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

11746916	Power Supply, Low Voltage

Inspection Equipment

11750221	Test Set - Low Voltage Power: Supply
1121457	Fixture Shock, Vertical and Horizontal Plane
11821658	Shock Adapter, Plate Vib Horz-Vert Plane/ Shock-Z
11821647	Vibration/Shock Test Fixture, Electronic Unit, AC, FAT
11821648	Cable Set - Electronics Unit, FAT
11823313	Fixture Test - PWB and Module

Packaging Data Sheet

P11746916	Packaging of Power Supply, Low Voltage 11746916

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuriug activity or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 2026t0-23T01:26Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The low voltage power supply, herein referenced to as the assembly, shall be manufactured in accordance with Drawing 11746916 and drawings pertaining thereto and, when assembled, shall net the requirements of this specifieatimg (See 4.5.1).

3.1.1 Function. The assembly shall provide the following functions:

	Designation
a.	Reduced-load output voltage characteristics
b.	Full-load output voltage regulation
c.	Power transient and +15V interlock
d.	"Q" motor on-time limiting
e.	Five volt overvoltage protection
f.	Overcurrent protection
g.	Relay interlock
h.	FN low charge voltage
i.	Computer ON characteristics

3.1.2 General specification. The following provisions of MIL-F-13926 apply: (see 4.5-1)

a. Order of procedure
b. Dimensions and tolerances
c. Inorganic proactive surface finishes
d. Part identification and marking
e. Workmanship

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a. Temperature	730 ± 18°F
b. Relative humidity	50 percent ± 30 percent
c. Atmospheric, pressure	28.5 + 2.0 - 3.0 in. Hg.

3.2 First article. When specified (see 6.2). the contractor droll furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

3.3.1 Reduced-load output voltage characteristics. Under the reduced-load condition, item 1.2 of table I, with the tank power, item 2.1 of table I, applied at 24 ± 1 Vdc, with the EMER POWER switch A31S1 in the ON position, the outputs betweeen pins as listed for items 1, 2, 3, 4 and 5 of table II shall have the characteristics specified therin. (See 4.6.2.1)

3.3.2 Full-load output voltage ation. Under the full-load condition. item 1.1 of table I, with the EM POWER switch A31S1 in the ON positions, the outputs between pins as listed for items 1, 2, 3, 4, 5, 6 and 7 of table II shall be specified when the tank power, item 2.1 of table I, is applied at 18 +2 -1 Vdc and at 30 +0 -2 Vdc. With 30 +0 -2 Vdc tank power applied, the input current into A31J4-A and B shall be not greater than 6.0 amperes. (See 4.6.2.2)

3.3.3 Power transient and +15 V interlock. Under the full-load condition, item 1.1 of table I, with the computer ONpower item 2.2, table I applied and with the input power condition established as specified in table III, the output signal conditions shall be as specified in table III. (See 4.6.2.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE I. Lands, power, signals and interrconnections.

Item	Conditions	Characteristics	Connections
1.0	Loads		
1.1	Full-load:		As specified, connected between the following pins of A2P1.
1.1.1	Resistor	2.5 ohms ± 5 percent 20 watts (W)	15 and 17
1.1.2	Resistor	15 ohms ± 5 percent, 25W	14 and 17
1.1.3	Resistor	27 ohms ± 5 percent, 25W	6 and 17
1.1.4	Resistor	290 ohms ± 5 percent, 5W	11 and 17
1.1.5	Resistor	51 ohms ± 5 percent, 2W	16 and 17
1.1.6	Resistor	120 ohms ± 5 percent, 1/2W	4 and 17
1.1.7	Resistor	150 ohms ± 5 percent, 1/2W	5 and 17
1.2	Reduced load:		As specified, connected between the following pins of A2P1:
1.2.1	Resistor	3.3 ohms ± 5 percent, 10W	15 and 17
1.2.2	Resistor	20 ohms ± 5 percent, 15W	14 and 17
1.2.3	Resistor	33 ohms ± 5 percent, 15W	6 and 17
1.2.4	Resistor	390 ohms ± 5 percent, 2W	11 and 17
1.2.5	Resistor	68 ohms ± 5 percent, 1W	16 and 17
1.2.6	Resistor	120 ohms ± 5 percent, 1/2W	4 and 17
1.2.7	Resistor	150 ohms ± 5 percent, 1/2W	5 and 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power, signals and interconnections. - Continued

Item	Conditions	Characteristics	Connections
1.3	"Q" switch load	25 ohms ± 5 percent, 10W	Applied between A2P1 pins 12 and 9, only during negative excursions of load "OW" signal (fig. 2)
1.4	Overcurrent load		
1.4.1	Resistor	0.25 ohms ± 5 percent, 10W	When specified, connected between A2P1 pins 15 and 17
1.5	5 V overvoltage load		
1.5.1	Resistor	15 ohms ± 5 percent, 1/4Q	As specified, connected between test points TP11 and TP22 on circuit card A2A1
1.6	15 V interlock load		
1.6.1	Resistor	1000 ohms ± 5 percent, 1/2W	As specified, connected between A2P1 pins 21 and 17
1.7	PFN Low charge load		
1.7.1	Resistor	300 ohms ± 5 percent, 1/4W	As specified, connected between A2P1 and pins 2 and 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power, signals and interconnections. - Continued

Item	Conditions	Characteristics	Connections
2.0	Power sources		
2.1	Tank power	Adjustable: 0 to 45 Vdc Ripple: 200 mV p-p max Current Capacity: 25A	As specified, applied between A31J4 pins A and B (+), and C and D (rtn)
2.2	Computer ON power	28 ± 2 vdc Ripple: 200 mV p-p max Current capacity: 0.5A	When specified, applied between A2P1 pins 3 (+) and 17 (rtn)
2.3	Tank power transient		
2.3.1	90 V transient	28 to 90 V pulse, as specified in figure 1a Current capacity: 3A	As specified, between A31J4 pins A and B (+), and C and D (rtn)
2.3.2	9 V transient	28 to 9.0 V pulse, as specified in Figure 1b Current capcity: 12A	
2.4	15V Interlock power	15.0 ± 0.5 vdc Ripple: 25 mv p-p max Current capacity: 0.5A	Applied between A2P1 pins 1 (+) and 17 (rtn)
3.0	Signal source		
3.1	$\overline{\text{FIRE}}$	Pulse train with: PRF of one pulse each ten seconds. Pulse width and voltage levels as specified in figure 2.	As specified, applied between A2P1 pins 19 and 9 (rtn)
4.	Interconnection		
4.1	Relay interlock return		Unless otherwise specified, interconnection of A2P1 pins 20 and 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

3.3.4 "Q" motor on-time limiting. Under the full-load conditions, item 1.1 of table I, with the tank power, item 2.1 of table I, supplied to 20 + 1 Talc, with the EMER POWER switch A31S1 in the ON position and with the FIRE signal, item 3.1 of table I, supplied as specified in figure 2, the output signal between A2P1-12 and A2P1-9 (rtn) shall be as specified in figure 2. (See 4.6.2.4)

3.3.5 Five volt overvoltage proection. Under the reduced-load condition. Item 1.2 of table I, with tank power, item 1.1 of table I, applied at 28 ± 2 Vdc and with the EMER POWER switch A31S1 in the ON position and with the 5V overvoltage load resistor, item 1.5.1 of table I, momentaraily connected between the test points specified, the output between pins A2P1-15 and A2P1-9 (rtn) shall be a dc voltage not greater than 1.5 Vdc. Subsequently, when the emergency power witch S1 is not to OFF momentarily and then to ON, the output between pins A2P1-15 and A2P1-9 (rtn) shall be 5.2 ± 0.5 vdc. (See 4.6.2.5)

3.3.6 Overcurrent protection. Under the full-load condition, item 1.1 of table I, with the tank power, item 2.1 of table I, applied at 28 ± 2 vdc, with the EMER POWER switch A31S1 in the ON position, the output between pins A2P1-15 l and A2P1-9 (rtn) shall be 5.2 ± 0.5 Vale. With momentary application of the overcurrent load resistor, item 1.4.1 of table I, between pine specified therein, the output between pins A2P1-15 and A2P1-9 (rtn) shall be not greater then 1.5 Vdc. Subsequenty, when the EMER POWER switch is set to OFF momentarily and then to 0N, the output between A2P1-15 and A2P1-9 (rtn) shall be 5.2 ± 0.5 Vale. (See 4.6.2.6)

3.3.7 Relay interlock. Under the full-load condition, item 1.1 of table I, with the tank power, item 2.1 of table I, applied at 28 ± 2 Vdc and with the EMER POWER switch A31S1 in the ON position, the output between pins A2P1-15 and A2P1-9 (rtn) shall be 5.2 ± 0.5 Vdc. When the relay interlock return interconnection, item 4.1 of table I, is removed the output between pins A2P1-15 and A2P1-9 (rtn shall be less than 1.5V. (See 4.6.2.7)

3.3.8 PFN low charge voltage. Under the full-load condition, item 1.1 of table I, with the tank power, item 2.1 of table I, applied at 28 ± 2 Vdc and with the EMER POWER switch A31S1 in the ON position, the output between pins A2P1-2 and A2P1-17 (rtn) Shall be 0.2 ± 0.2 Vdc. With the EMER POWER switch in the EMER TEST position, the output between A2P1-2 and A2P1-17 shall be 6.9 ± 0.7 Vdc. (see 4.6.2.8)

3.39 Computer ON characteristics. Under the full-load condition, ices 1.1, table I, with the tank power, item 2.1 of table I, applied at 28 ± 2 Vdc and with the computer ON power item 2.2, table I applied, the voltage between pins A2P1-15 and A2P1-9 (rtn) shall be 5.2 ± 0.5 Vdc. (See 4-6.2.9)

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:26Z
Check the source to verify that this is the currentversion before use.

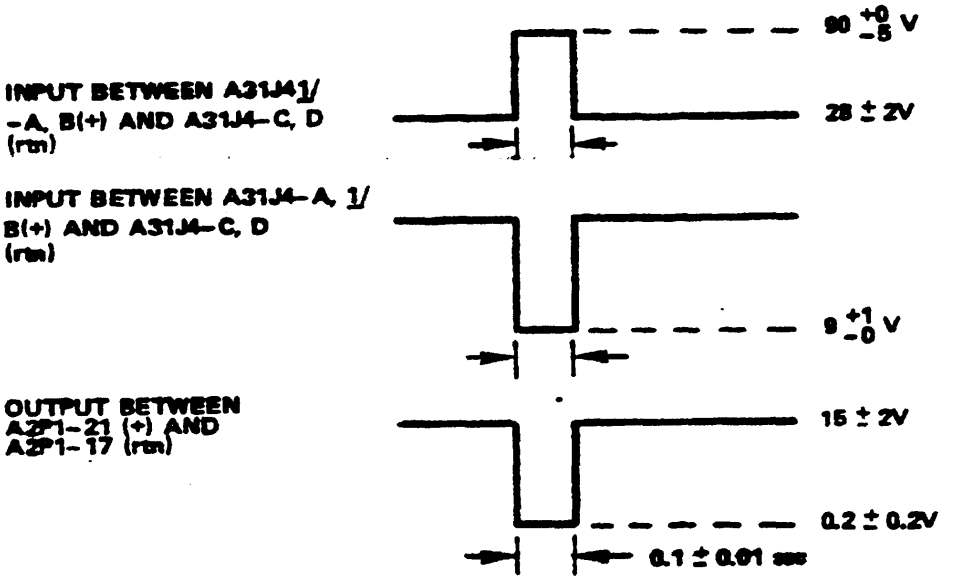


FIGURE 1. Power transients and +15V interlock.

1/ Rise Time (t_r) = 10 ± 5 milliseconds (msec).
Fall Time (t_r) = 10 ± 5 msec.

2/ Time intervals are specified at the 50 percent point of the pulse amplitude.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:26Z
Check the source to verify that this is the currentversion before use.

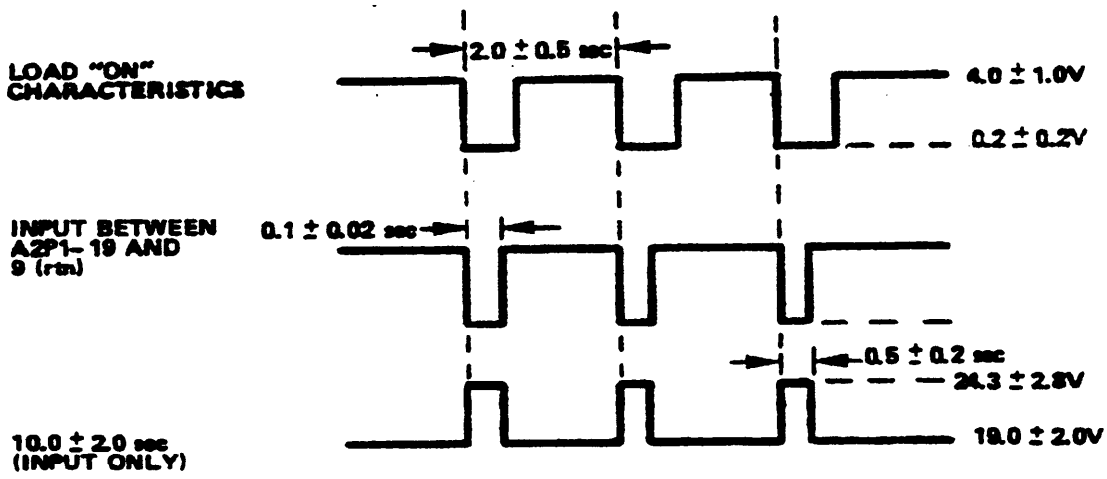


FIGURE 2. "Q"-motor on-time limiting signal characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

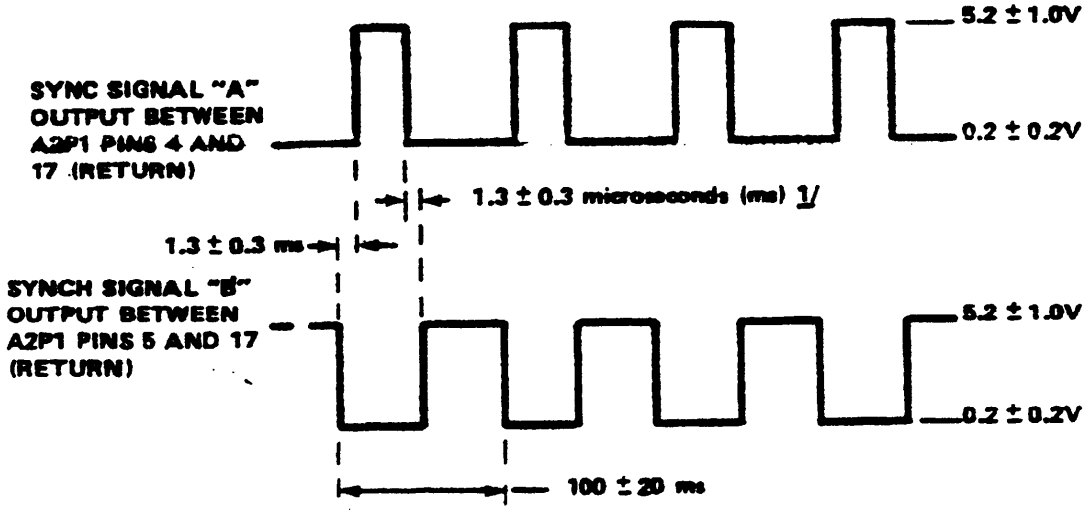


FIGURE 3. SYNC SIG A and SYNC SIG B output characteristics.

1/ Time intervals are specified at the 50% point of the pulse amplitude.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE II. Output voltage characteristics.

Item	Output Pins Of A2P1	Output Nomenclature	DC Output Voltage Characteristics		Pulse Output Voltage Characteristics
			DC Voltage	Ripple Content	
1	15 and 9 (rtn)	5 Vdc	5.2 ± 0.5	240 mV p-p max	--
2	14 and 17 (rtn)	15 Vdc	15.2 ± 0.8	350 mV p-p max	--
3	6 and 17 (rtn)	14 Vdc	14.0 ± 2.0	350 mV p-p max	--
4	11 and 17 (rtn)	29 Vdc	31.0 ± 3.0	350 mV p-p max	--
5	16 and 17 (rtn)	-6 Vdc	-5.0 ± 0.8	210 mV p-p max	--
6	4 and 17 (rtn)	SYNC SIG A	--	--	Squarewave pulse train, with prf of 10 kHz ± 5 percent and voltage levels specified on figure 3
7	5 and 17 (rtn)	SYNC SIG B	--	--	Squarewave pulse train, with prf of 10 kHz ± 5 percent and voltage levels specified on figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE III. Power transient and +15V interlock.

Item	Input Power Condition 1/	Output Signal Condition 2/	
		A2P1-15 3/	A2P1-21 4/
1	figure 1: 90 Volt transient	+5.2 ± 0.5V	NA
2	figure 1: 28 Volt transient	+5.2 ± 0.5V	figure 1: 15 Volt transient
3	+13.0 ± 0.5V	NA	+15 ± 2V
4	+36.5 ± 0.5V	NA	+15 ± 2V
5	-41.5 ± 0.5V	NA	+0.2 ± 0.2V

1/ Input power between A31J4 pins A and B (+) and C and D (rtn)
2/ NA = Not applicable
3/ Referenced to P1-9
4/ Referenced to P1-17

3.4 Enviromental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after esposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (mset) applied in each direction along three mutally perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction alomg three mutally perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 4. Duration of exposure shall be not less than 80 minutes in each of three mutally perpendicular axes. (See 4.6.3.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to + 140°F. (see 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. the assembly shall be capable of operating as specified herein after exposure to storage temperature ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

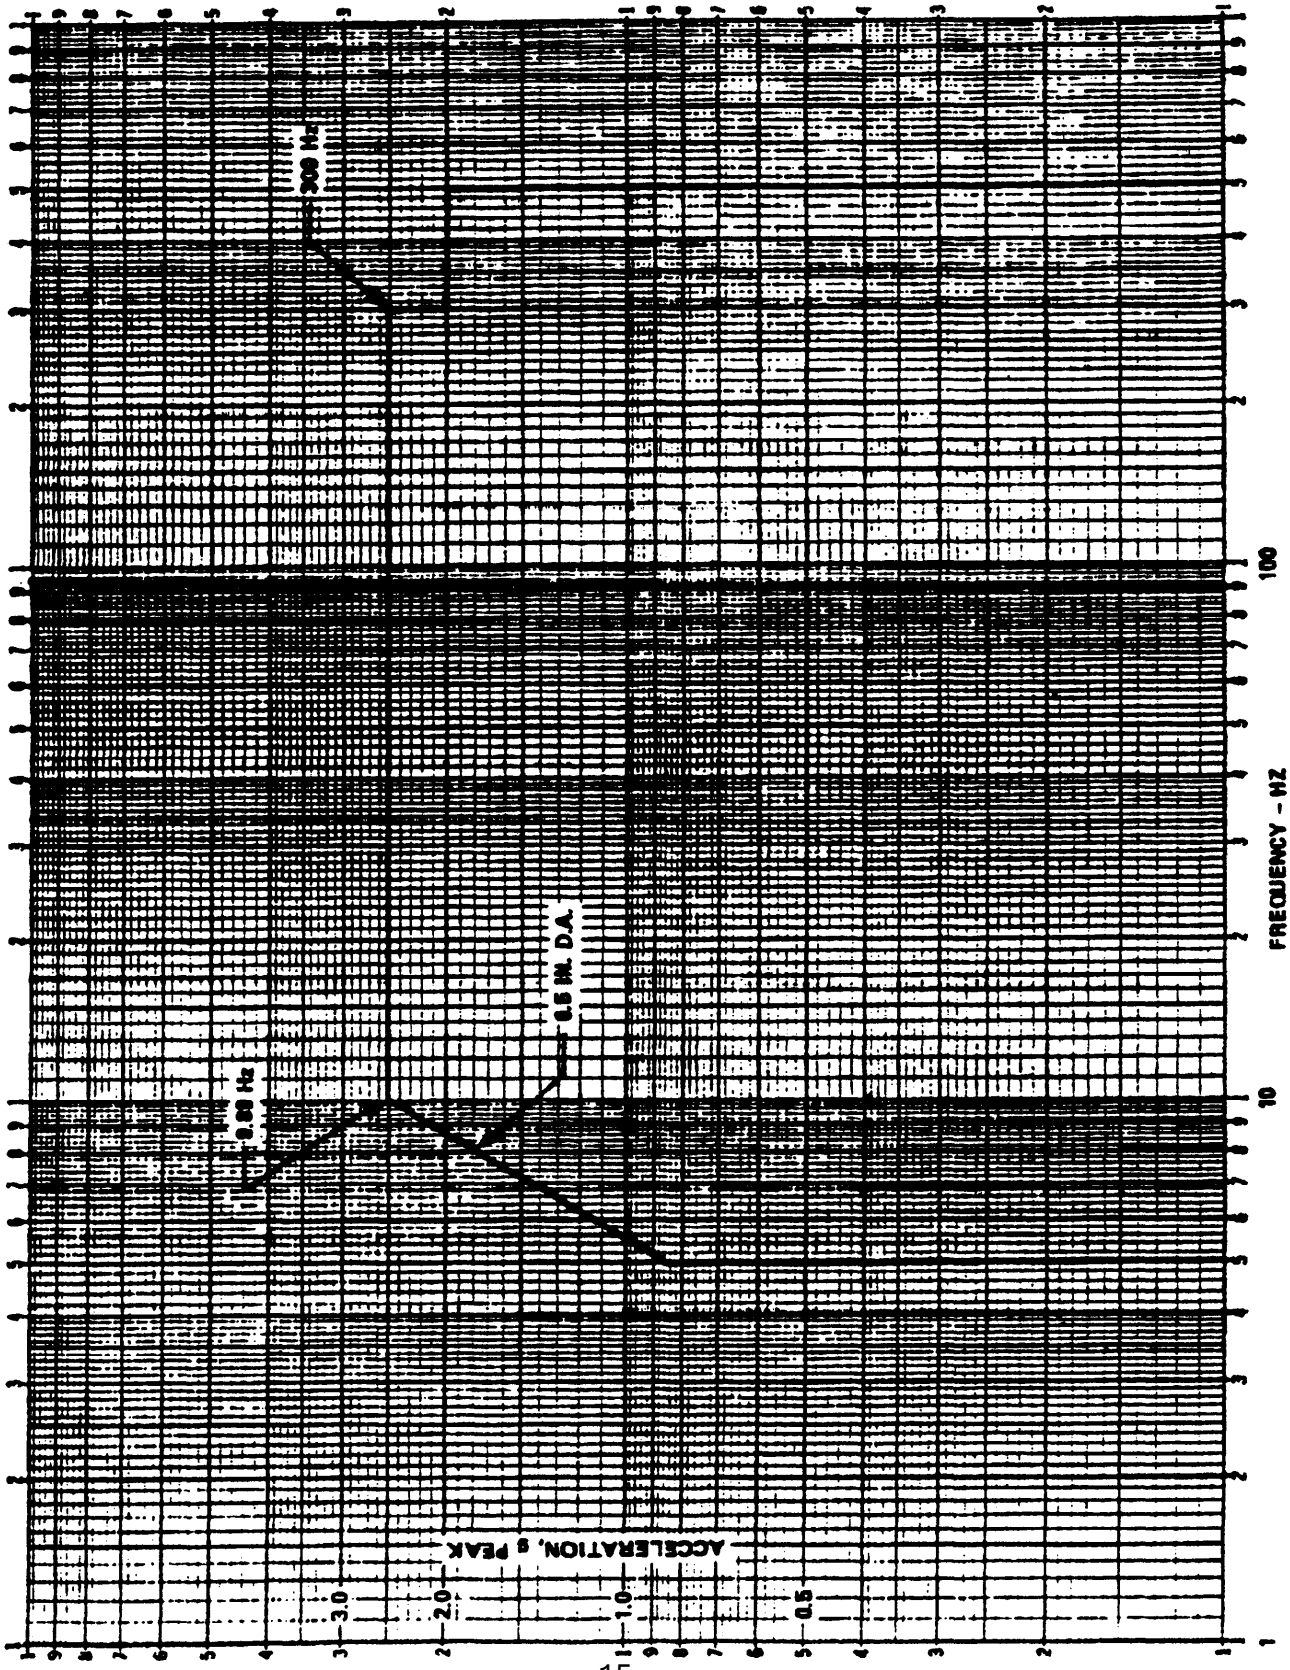


FIGURE 6. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the Contractor is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of inspection requiarements specified herein,unless disapproved by the Government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classifocation of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contrac tor shall be specified in the contract.

4.4.1. Samples. the first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables IV, V and VI.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contracturarequirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to winess inspections performed by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE IV. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Reduced-load output voltage characteristics	3.3.1	4.6.2.1
102	Full-load output voltage regulation	3.3.2	4.6.2.2
103	Power transient and + 15V interlock	3.3.3	4.6.2.3
104	"Q" motor on-time limiting	3.3.4	4.6.2.4
105	5V overvoltage protection	3.3.5	4.6.2.5
106	Overcurrent protection	3.3.6	4.6.2.5
107	Relay interlock	3.3.7	4.6.2.7
108	PFN low charge voltage	3.3.8	4.6.2.8
109	Computer ON characteristics	3.3.9	4.6.2.9

TABLE V. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specifications	3.1.2	MIL-P-13926 - Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE VI. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature Cycling	3.4.3 and 3.4.4	4.6.3.5

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the embly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a Control sample shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table V.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Govermemt representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VI shall be applied separately to each assembly in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan b.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordnce with the provisions of MIL-STD-105. All the tests in table V and only the test of item 307 in table VI shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table and shall be examined visually for completeness, improper asembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless Otherwise specified in the Contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P11746916.

4.6 Methods of Inspection.

4.6.3 Test equipment. Unless the assembly is procured apart from the next higher assembly, the test equipent in table VII shall be used where specified to perform the required test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Test equipment.

Item	Part Number	Nomenclature
1	11750221	Test Set - Low Voltage Power Supply
2	11821457	Fixture Shock, Vertical and Horizontal Plane
3	11821458	Shock Adapter, Plate Vib Hors-Vert Plane/ Shock-Z
4	11821647	Vibration/Shock Test Fixture, Electronic Unit, AC, FAT
5	11821648	Cable Set - Electronics Unit, FAT
6	11823313	Fixture Test - PWB and Module

4.6.2 Performance tests.

4.6.2.1 Reduced-load output voltage characteristics. Use item 1 of table VII or suitable equipment to determine compliance with 3.3.1.

4.6.2.2 Full-load output voltage regulation. Use item 1 of table VII or suitable equipment to determine compliance with 4.4.1.

4.6.2.3 Power transient and +15V interlock. Use item 1 of table VII or suitable equipment to determine compliance with 3.3.3.

4.6.2.4 "A" motor on-item limiting. Use item 1 of table VII or suitable equipment to determinet compliance with 3.3.4.

4.6.2.5 Five volt overvoltage protection. Use item 1 of table VII or suitable equipment determine complance with 3.3.5.

4.6.2.6 Overcurrent protection. Use item 1 of table VII or suitable equipment to determine compliance with 3.3.6.

4.6.2.7 Replay interlock. Use item of table VII or suitable equipment to determine compliance with 3.3.7.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:26Z
Check the source to verify that this is the current version before use.

4.6.2.8 Pulse forming network (PFN) low charge voltage. Use item 1 of table VII or suitable equipment to determine compliance with 3.3.8.

4.6.2.9 Computer ON characteristics. Use item 1 of table VII a suitable equipment to determine compliance with 3.3.9.

4.6.3 Environment tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use items 2, 3 and 4 of table VII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedures I, figure 516.2. Apply three half sine wave shock pulses is each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 18 ± 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table IV.

4.6.3.1.2 High incensity. Use item 4 of table VII or mount the assembly in a a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in aach direction along the three axes. Peak amplitude shall be 100.0 + 10.0 g with a time duration of 1.5 ± 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table IV.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration a specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use items 3 and 4 of table VII or mount the assembly in a suitable vibration fixture end subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 4 and duration of exposure shall be not less than 80 minutes per axis At the conclusion of this test, subject the assembly to the performance tests of table IV.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3 .2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Use items 5 and 6 of table VII or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure 1. The highest operating temperature shall be 140°F. the performance tests of table IV shall be l pplied.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:26Z
Check the source to verify that this is the current version before use.

4.6.3.4 Low temperature. Use item 5 and 6 of table VII a suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-810 method 502.1, procedure 1. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table IV shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the seembly to the temperature profile specified in figure 5. At the conclusion of this test, subject the assembly to the performance tests of table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

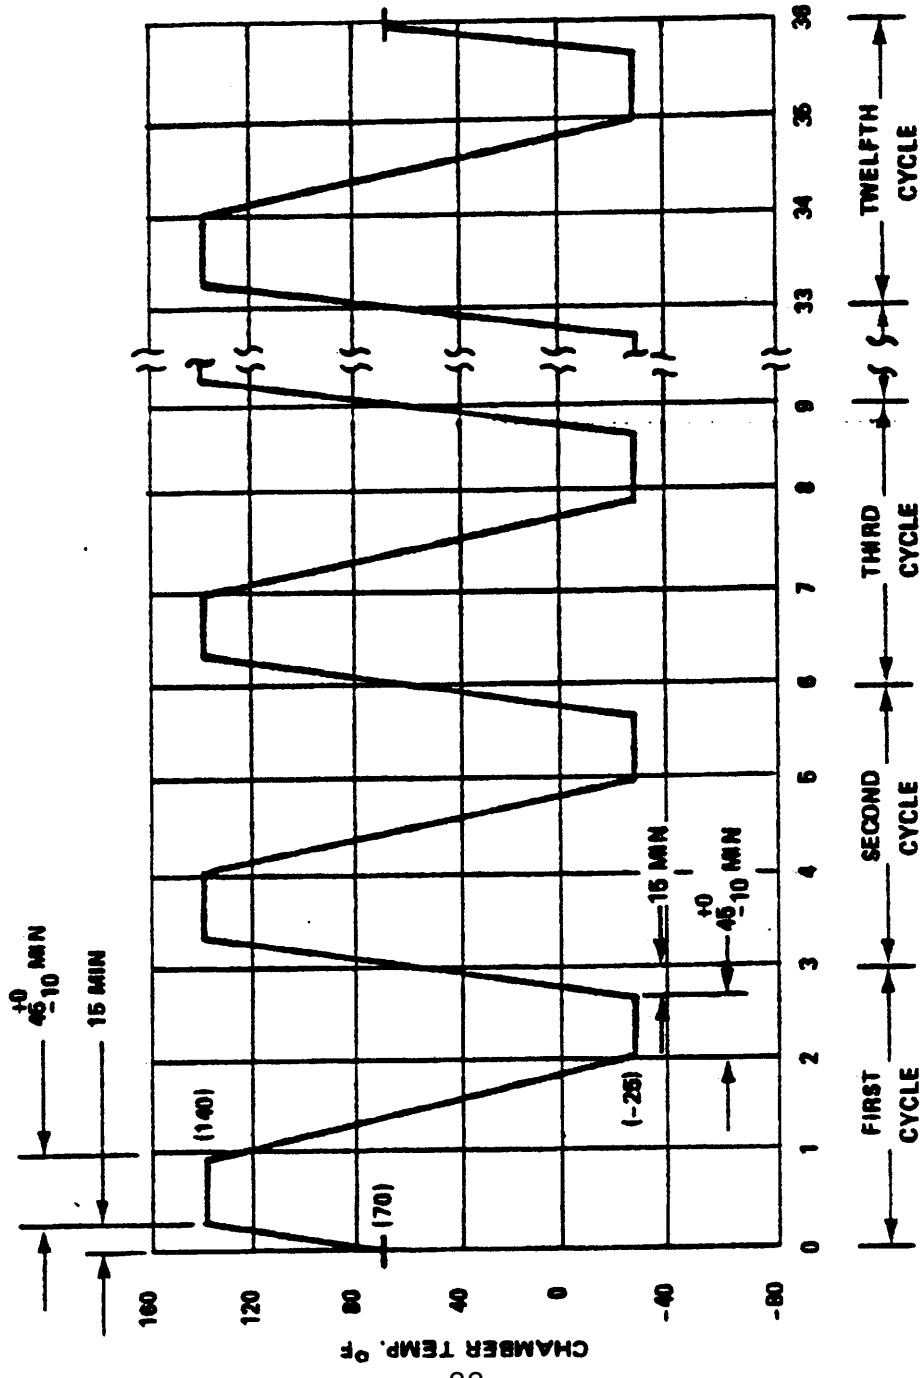


FIGURE 8. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packging data sheet P11746916. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES

6.1 Intended Use. The Power Supply, Low Voltage is a functional assembly of the Laser Fire Control Finder (AN/VVG-2). The assembly's major functions are to provide:

a. regulated power forms.
b. pulsed power on demand.
c. 10 kHz square wave sync signals.
d. overcurrent sensing.
e. overvoltage sensing.
f. input power transient isolation.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Special tests and examination as required, the type of inspection required and the actitity responsible for testing and its facility.

c. Applicable packaging data sheet number (see 5.1).

d. Selectlon of applicable levels of preservation, packaging and packing.

e. Appliable stock number.

f. First article inspection requirements.

6.3 Previous revisions of MIL-P-62211B was for the US Army Armament Research and Development Command's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

Custodian:
Army-AR

Preparing Activity:
Army-AR
Project 1240-A777

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-P-62211B POWER SUPPLY, LOW VOLTAGE: 11746916

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:26Z
Check the source to verify that this is the current version before use.