FED. SUP CLASS
5935

SHELL SIZE BASIC NO.	A MAX HEIGHT OF LANYARD FLANGE	B MAX WIDTH OF LANYARD FLANGE	C MIN I.D. SHELL	D ±.005 AVERAGE P.A. INSERT SEAL	E MIN BSC BALL SPACING	F BALL LOCATION (ANGULAR)	G +.002 -.005 BALL LOCATION (DEPTH)	H ±.010 FROM B.S. OF INSERT	K MAX. WIDTH OF KEYWAY	N ±.031 DEPTH OF V-BLK	P POINT OF SPRING CONTACT	FOR INSERT ARRANGEMENT SEE DRAWING
-5	1.261	.925	.444	.374	.391	30°	.202	.344	.114	IN DISENGAGED POSITION .310	.150 MAX MEASURE WITH SQUARE NOSE PIN HOUSING GAGE DIAMETER OF MATING CONTACT	MS 33656
-7	1.411	1.062	.579	.490	.526			.460				MS 33699
-12	1.531	1.172	.713	.630	.661	22½°		.600				MS 33700
-19	1.681	1.328	.852	.770	.799			.740				MS 33701
-27	1.826	1.473	1.007	.925	.954			.895				MS 33702
-37	1.914	1.609	1.127	1.047	1.076			1.017				MS 33703

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCE DECIMALS ± .010
ANGULAR TOLERANCE ± 1/2°

NOTES
1. COUPLING RING AND BALLS ARE SHOWN IN THE ENGAGED POSITION FOR REFERENCE. THIS POSITION SHALL ONLY BE POSSIBLE WHEN P-INSERTED IN THE NORMAL DISENGAGED POSITION THE FOLLOWING IS TRUE.
   A. THE VISUAL LOCK INDICATOR IS NOT IN VIEW
   B. THE BALLS ARE RELEASED WHEN "K" MIN EQUALS "K".

EXAMPLE OF PART NO. MS 3138 S 19-32 S Y

MS NUMBER	CLASS	SIZE	INSERT ARRANGEMENT	CONTACT STYLE

ALTERNATE INSERT POSITION

THE STANDARDS TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT 62 REVISED Ⓐ 1 NOV 1965 Ⓑ 6 MAR 67 Ⓒ 20 JAN 1969 Ⓓ 21 JULY 1971

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY-AS Other Cust ARMY-EL	International Interest	TITLE CONNECTOR, PLUG, ELECTRIC, SOLDER TYPE LANYARD, PUSH-PULL COUPLING, SERIES I (CLASS E, P AND J)	MILITARY STANDARD MS 3138
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1761-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. NAVY-AS
Other Cust ARMY-EL
International interest
Procurement Specification MIL-C-81703
SUPERSEDES:


TITLE
CONNECTOR, PLUG, ELECTRIC, SOLDER TYPE, LANYARD PUSH-PULL COUPLING, SERIES I (CLASS E, P AND J)

MILITARY STANDARD
MS 3138
SHEET 2

FED. SUP CLASS 5935


CLASS P

POTTED SEAL

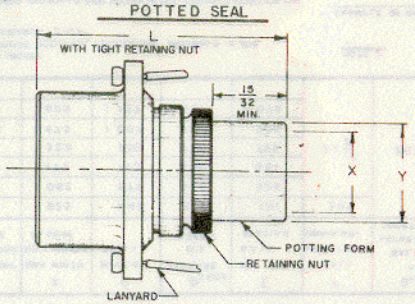

CLASS J

JACKETED CABLE GLAND SEAL

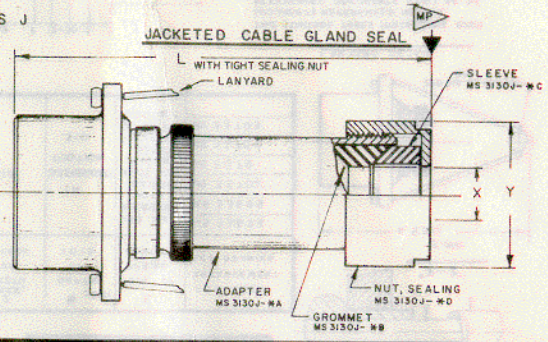

SHELL SIZE DASH NO.	L LENGTH MAX	X DIA. MIN. I.D. POTTING FORM	Y DIA. MAX. O.D. POTTING FORM
-3	1.718	.261	.391
-7		.372	.515
-12		.482	.630
-19		.602	.760
-27		.725	.887
-37		.857	1.047

SHELL SIZE DASH NO.	L LENGTH MAX.	X CABLE SEALING MIN.	X CABLE SEALING MAX.	Y MAX. DIA. NUT	ADAPTER MS3130J-*A	GROMMET MS3130J-*B	SLEEVE MS3130J-*C	NUT SEALING MS3130J-*D
-3	1.734	.178	.210	.645	MS3130J-3A	MS3130J-3B	MS3130J-3C	MS3130J-3D
-7	2.719	.381	.413	.926	MS3130J-7A	MS3130J-7B	MS3130J-7C	MS3130J-7D
-12	3.188	.412	.444	.988	MS3130J-12A	MS3130J-12B	MS3130J-12C	MS3130J-12D
-19	3.219	.522	.554	1.113	MS3130J-19A	MS3130J-19B	MS3130J-19C	MS3130J-19D
-27	3.219	.600	.632	1.113	MS3130J-27A	MS3130J-27B	MS3130J-27C	MS3130J-27D
-37	3.250	.662	.694	1.176	MS3130J-37A	MS3130J-37B	MS3130J-37C	MS3130J-37D

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
TOLERANCE: DECIMALS ±.016, ANGULAR TOLERANCE ±1/2°.

NOTES:
1 FOR CLASS J ADAPTER, SEALING NUT, SLEEVE AND GROMMET SEE MS 3130 SHEET 3.

MP MAX. CABLE WEIGHTS IN POUNDS (ALLOWABLE FORCE IN DIRECTION INDICATED).

SHELL SIZE	MAX. WEIGHT
-3	2.0
-7	2.7
-12	4.0
-19	5.5
-27	8.0
-37	12.0

EXAMPLE OF PART NO.

MS 3138 J 19-50 S Y

MS NUMBER | CLASS | SIZE | INSERT ARRANGEMENT | CONTACT STYLE | ALTERNATE INSERT POSITION

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT 62

REVISED (D) FOR CHANGES SEE SHEETS 1 & 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.