INCH POUND
MIL-L-70828A (AR)
2 June 1994
SUPERSEDING
MIL-L-70828 (AR)
09 September 1988

MILITARY SPECIFICATION

LEAD, EXPLOSIVE, PA534 PARTS FOR AND LOADING, ASSEMBLING AND PACKING

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements and quality assurance provisions for the parts and the loading, assembling and packing of one type of lead designated as Lead, Explosive, PA534.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1375

DISTRIBUTION STATEMENT A. **Approved for public release; distribution is unlimited.**

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-208	-	Ink Marking, Stencil Opaque (Porous and Non-Porous Surfaces)

MILITARY

MIL-P-116	-	Preservation, Methods Of
MIL-B-117	-	Bag, Sleeve and Tubing - Interior Packaging
MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-R-63419	-	RDX/Vinyl Chloride Copolymer Explosive Composition

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-331	-	Fuze and Fuze Component, Environmental and Performance Tests for
MIL-STD-650	-	Explosive: Sampling, Inspection and Testing
MIL-STD-1169	-	Packaging, Packing and Marking
MIL-STD-1190	-	Minimum Guidelines for Level C

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from DODSSP - Customer Service, Standardization Documents Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.5)

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

8796522	-	Marking Diagram and Sealing for Wood Packing Boxes
12550926	-	Detonator, Electric, PA537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

12550963 - Lead, Explosive, PA534
12550780 - M762 Explosive Lead Test Hardware
12550925 - Contact Sleeve, Detonator
12550007 - Packing and Marking for Box, Wood for Lead Explosive PA534

(Copies of other Government documents, drawings, and publications, required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

PUBLICATIONS

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, Parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. Orders should specify, "49 CFR 100-199 (latest revisions)".)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained. (See contract provisions for additional precedence criteria).

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The Components and assemblies shall comply with all requirements specified on Drawing 12550963, all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Moisture content. The moisture content of the PBX9407 Type I pellets or composition at the time and site of loading shall not exceed 0.20 percent.

3.4 Functioning. The lead shall be capable of high order initiation by a PA537 detonator across a minimum air gap of 0.075 inches when tested as specified. High order detonation will be evidenced by a minimum dent depth of 0.012 inch in the steel test plate, as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

3.5 Temperature conditioning and functioning of lead, explosive, PA534.

3.5.1 Hot temperature. The lead, explosive, PA534 shall function as specified in 3.4 after conditioning at 165 ± 5 degrees F and while at the conditioned temperature.

3.5.2 Cold temperature. The lead, explosive, PA534 shall function as specified in 3.4 after conditioning at -65 ± 5 degrees F and while at the conditioned temperature.

3.6 Waterproofness test of lead cup assembly. The lead cup assembly shall be waterproof as evidenced by proper output, as specified in 3.4, after being immersed in water maintained at 70 ± 10 degrees Fahrenheit at a depth of 2 inches minimum from the surface to the top of the assembly for a period of 48 hours minimum.

3.7 Change of qualified product. After first article, the manufacturer shall notify the purchaser prior to the implementation of any change which may affect performance, quality, reliability or interchangeability. Such notification shall include a thorough description of the proposed change and a suggested test plan designed to demonstrate that the change will not adversely affect performance, quality, reliability or interchangeability and that the changed product will continue to meet the specification requirement. The purchaser will review the proposed change and test plan and advise the manufacturer of the testing required to obtain approval of the proposed change. Upon completion of the prescribed tests, the results shall be submitted to the purchaser for review. Based upon the review the purchaser will approve or disapprove the change and notify the manufacturer. At the manufacturer's option, devices incorporating the change may be manufactured and tested prior to approval however, all shipments of these changed devices shall be withheld until approval is granted by the purchaser. Changes representative of those which are subject to this requirement are any design changes in the manufacturing processing such as:

a. Package structure and material changes or changes to the geometry.

b. Changes to process flow charts, assembly flow chart and testing flow charts.

c. Conductor materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

d. Assembly operations move from one line or building to another.

3.8 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.9 Workmanship. All parts and assemblies shall be fabricated loaded and assembled in a thorough, workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, grease, rust, and other foreign matter that would impair proper functioning. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. Exterior surface coating shall be continuous; however, a few light scratches not exposing base material may be permitted. All required markings and stamping shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:08Z
Check the source to verify that this is the current version before use.

4.1.2 General provisions. Unless otherwise specified herein, the provisions of MIL-A-48078 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection

b. Quality conformance inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in quantities indicated.

PART DESCRIPTION	DRAWING	QUANTITY
Disc, Closure	12550965	25
Cup, Lead	12550964	25
Lead, Explosive, PA534	12550963	285 (Note)

Note: Fifteen (15) of these assemblies shall be assembled using the procedure specified in 4.5.3 to obtain the density of the explosive charge.

4.3.2 Inspection to be performed. See MIL-A-48078 and TABLE I specified herein.

4.3.3 Rejection. See MIL-A-48078 and TABLE I specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF CHARACTERISTICS

MIL-L-70828A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	Lead cup assembly and components	1 OF 1	SEE BELOW
			NEXT HIGHER ASSEMBLY

CLASSIFICATION	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD REFERENCE
	Disk, Lead			
	(Dwg. 12550965)			
	Examination for defects	25-0-1	3.2	4.4.2.1
	Cup, Lead			
	(Dwg. 12550964)			
	Examination for defects	25-0-1	3.2	4.4.2.2
	Lead, Explosive, PA534			
	(Dwg. 12550963)			
	Examination for defects	285	3.2	4.4.2.3
	Functioning Output	150-0-1	3.4	4.5.4
	Hot temperature conditioning and functioning	30-0-1	3.5.1	4.5.5.2
	Cold temperature conditioning and functioning	30-0-1	3.5.2	4.5.5.3
	Waterproofness	60-0-1	3.6	4.5.6
	Density of explosive charge	15-0-1	3.2	4.5.3

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of leads shall contain PBX9407 Type I, in accordance with MIL-R-63419 from not more than one batch or a blend of batches which results in homogeneity of all PBX9407 used in loading a lot.

4.4.2 Examination and tests.

a. Classification of characteristics. Quality conformance examinations and tests are specified in the following Classification of Characteristics paragraphs. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing and specification requirements utilizing as a minimum the conformance criteria specified. When cited herein, attributes sampling inspection shall be conducted in accordance with TABLE II below, using the inspection levels stated in the Classification of Characteristics paragraphs.

TABLE II Attributes sampling inspection

	Inspection Levels					
Lot Size	I	II	III	IV	V	VI
2 to 8	*	*	*	*	5	3
9 to 15	*	*	*	13	5	3
16 to 25	*	*	*	13	5	3
26 to 50	*	*	32	13	5	3
51 to 90	*	*	32	13	13	5
91 to 150	*	125	32	13	13	5
151 to 280	*	125	32	32	20	8
281 to 500	*	125	32	32	20	8
501 to 1200	*	125	80	50	20	13
1201 to 3200	1250	125	80	50	32	13
3201 to 10000	1250	125	125	50	32	13
10001 to 35000	1250	315	125	80	50	13
35001 to 150000	1250	315	125	80	50	13
150001 to 500000	1250	500	200	125	50	13
500001 and over	1250	500	200	125	50	13

Numbers under inspection levels indicate sample size; asterisks (*) indicate one hundred percent inspection. If sample size exceeds lot size, perform one hundred percent inspection. Accept on zero and reject on one or more failures/defects for all inspection levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.6). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provision(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF CHARACTERISTICS

MIL-L-70828A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Disk, lead	1 OF 1	12550965
			NEXT HIGHER ASSEMBLY: 12550963

CLASSIFICATION	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD REFERENCE
Critical	None defined			
Major				
101	Thickness (1)	Level IV	3.2	Gage
102	Diameter, min. (1)	Level IV	3.2	Gage
Minor				
201	Evidence of poor workmanship	Level V	3.9	Visual

NOTES:
(1) See paragraph 4.5.1

AMSMC Form 1570b-E, 1 Jul 89 Replaces AMSMC Form 1570, 1 Feb 85, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF CHARACTERISTICS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	Cup, lead	1 OF 1	12550964
			NEXT HIGHER ASSEMBLY: 12550963

CLASSIFICATION	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD REFERENCE
Critical	None defined			
Major				
131	Thickness of bottom (1)	Level IV	3.2	Gage
132	Outside diameter (1)	Level IV	3.2	Gage
133	Inside diameter (1)	Level IV	3.2	Gage
134	Length	Level IV	3.2	Gage
Minor				
201	Inside finish improper (1)	Level V	3.2	Gage
202	Evidence of poor workmanship	Level V	3.9	Visual

NOTES:
(1) See paragraph 4.5.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF CHARACTERISTICS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Lead, explosive, PA534	1 OF 1	12550963
			NEXT HIGHER ASSEMBLY

CLASSIFICATION	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD REFERENCE
Critical	None defined			
Major				
101	Explosive on exterior	100%	3.2	Visual
102	Closure disk punctured	100%	3.2	Visual
103	Cup split or cracked	100%	3.2	Visual
104	Functioning output	150-0-1	3.4	4.5.4
105	High temperature conditioning and functioning	25-0-1	3.5.1	4.5.5.2
106	Low temperature conditioning and functioning	25-0-1	3.5.2	4.5.5.3
107	Density of explosive charge		3.2	4.5.3
108	Total length	Level IV	3.2	Gage
109	Outside diameter, max.	Level IV	3.2	Gage
110	Lacquer seal missing, incomplete or on wrong end	Level IV	3.2	Visual
Minor				
201	Crimp less than 360 degrees	Level V	3.2	Visual
202	Assembly damaged	Level V	3.2	Visual
203	Evidence of poor workmanship	Level V	3.9	Visual
204	Disk folded or wrinkled	Level V	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections specified herein is identified in the "Inspection Method Reference" column of the Classification of Characteristics listings starting with 4.4.2.1. Contractor inspection equipment designs shall be submitted for Government approval as specified in the contract. See section 6 of MIL-A-48078 and 6.3.

4.5 Methods of inspection.

4.5.1 Dimensional control of stamped parts. In place of the normal sampling associated with the Classification of Characteristics, and with the approval of the Contracting Officer, a sample of at least ten (10) parts may be dimensionally inspected to qualify the tool used in the stamping process for use in production. In addition, a random sample of five (5) parts shall be selected from the last portion of each hour's production for dimensional inspection as a control of the tool during production.

If any defective parts are found during qualification of the tool, the tool producing the defective part shall not be used in production.

If any defective parts are found when inspection is performed for control of the tool, the tool producing the defective part shall be removed from production. Further, that portion of production since the last tool control check shall be returned to the contractor for corrective action.

All tools removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request.

4.5.2 Moisture and volatiles content of explosive charge. The contractor shall provide adequate controls to insure compliance with the applicable requirements. The moisture and volatiles content of the explosive charge shall be determined at the loading station at the time of loading. This determination shall be made at least once each four (4) hours of production. Sampling and testing of the explosive charge shall be in accordance with MIL-STD-650, Method 101.5. In addition, if the moisture and volatiles content fails to comply with the requirement specified on the applicable drawing and loading has not begun, the explosive charge

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

material shall be rejected until corrective action has been taken as verified by repeating the moisture and volatiles content determination. If loading has begun, lead cup assemblies loaded with the non-conforming explosive charge shall be rejected.

4.5.3 Density of explosive charge. A minimum of two (2) assemblies, representative of the lead cup assemblies being processed, shall be loaded and the densities determined to qualify each press prior to its use in production. In addition, a sample of two (2) assemblies shall be processed during the last portion of each one (1) hour's production from each press and the density determined as a control of each press during production.

If any defective assembly is found when inspection is performed for control of a press, the press producing the defective assembly shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for corrective action.

All presses removed from production because of some fault, may, after corrective action, be returned to production providing they pass the qualification test above.

The following procedure shall be used to determine the density of the explosive charge.

a. Weigh empty lead cup (grams)

b. Measure bottom thickness (inches)

c. Measure wall thickness (inches)

d. Load cup

e. Weigh loaded lead cup (grams)

f. Measure height to top of charge (inches)

g. Measure outside diameter of loaded lead cup (inches)

h. Calculate weight of charge (e-a) (grams)

i. Calculate height of change (f-b) (inches)

j. Calculate volume of explosive charge (cubic centimeters) = (.7854) x (16.39) x (g-2c)^2 x (i)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

k. Calculate density of explosive charge (above). (Grams per cubic centimeter) = (h/j)

If any assembly fails to comply with the density requirements specified on the applicable drawing, it shall be classed defective. This is a destructive test. Assemblies so tested shall not be returned to the lot.

Note: When weighing in water, use distilled water containing a suitable wetting agent, e.g. "Aerosol" (1cc per 250cc distilled water).

4.5.4 Functioning output. The output functioning tests shall be performed in accordance with the following procedures. The lead assembly lot shall be rejected if two (2) or more lead assemblies fail to fire on the first attempt or fail to produce a depression on the steel test plate to the required depth specified in 3.4.


The lead assemblies shall be temperature conditioned at 70 ± 10 degrees F for two (2) hours, minimum, prior to performing the functioning tests. The tests shall be performed as specified in MIL-STD-331, Test 301.1.

The test hardware shall be constructed in accordance with the M762 explosive lead test hardware drawing, 12550780. This hardware complies with MIL-STD-331, Test 301.1 and also provides proper functional interfaces. The test hardware shall be assembled as shown in Figure 1.

The lead assembly shall be initiated by a PA537 detonator, or approved signal, positioned in line and on top of the explosive lead under test. A grounding wire shall be inserted into the sleeve between the contact sleeve detonator, 12550925, and the sleeve, 12550780-2, and comes out the top of the sleeve. The positive lead from the energy source shall be attached to the pin of the PA537 detonator and the ground lead shall be attached to the ground. The detonator shall be fired by applying the energy from a 100 (one-hundred) microfarad, max capacitor charged to 1.6 volts max or other suitable power source (e.g., 6-volt battery). The depression produced in the steel test plate shall be measured to determine compliance with 3.3.1. The probe used to measure the depth of the depression shall be as specified in test procedure 301.1 of MIL-STD-331. Depth measurements shall be recorded and forwarded as specified in 6.4. Any change in the test procedures or equipment shall have prior Government approval. Note - If any detonator fails to function, it shall be considered "No Test".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

FIGURE 1
EXPLOSIVE LEAD TEST HARDWARE

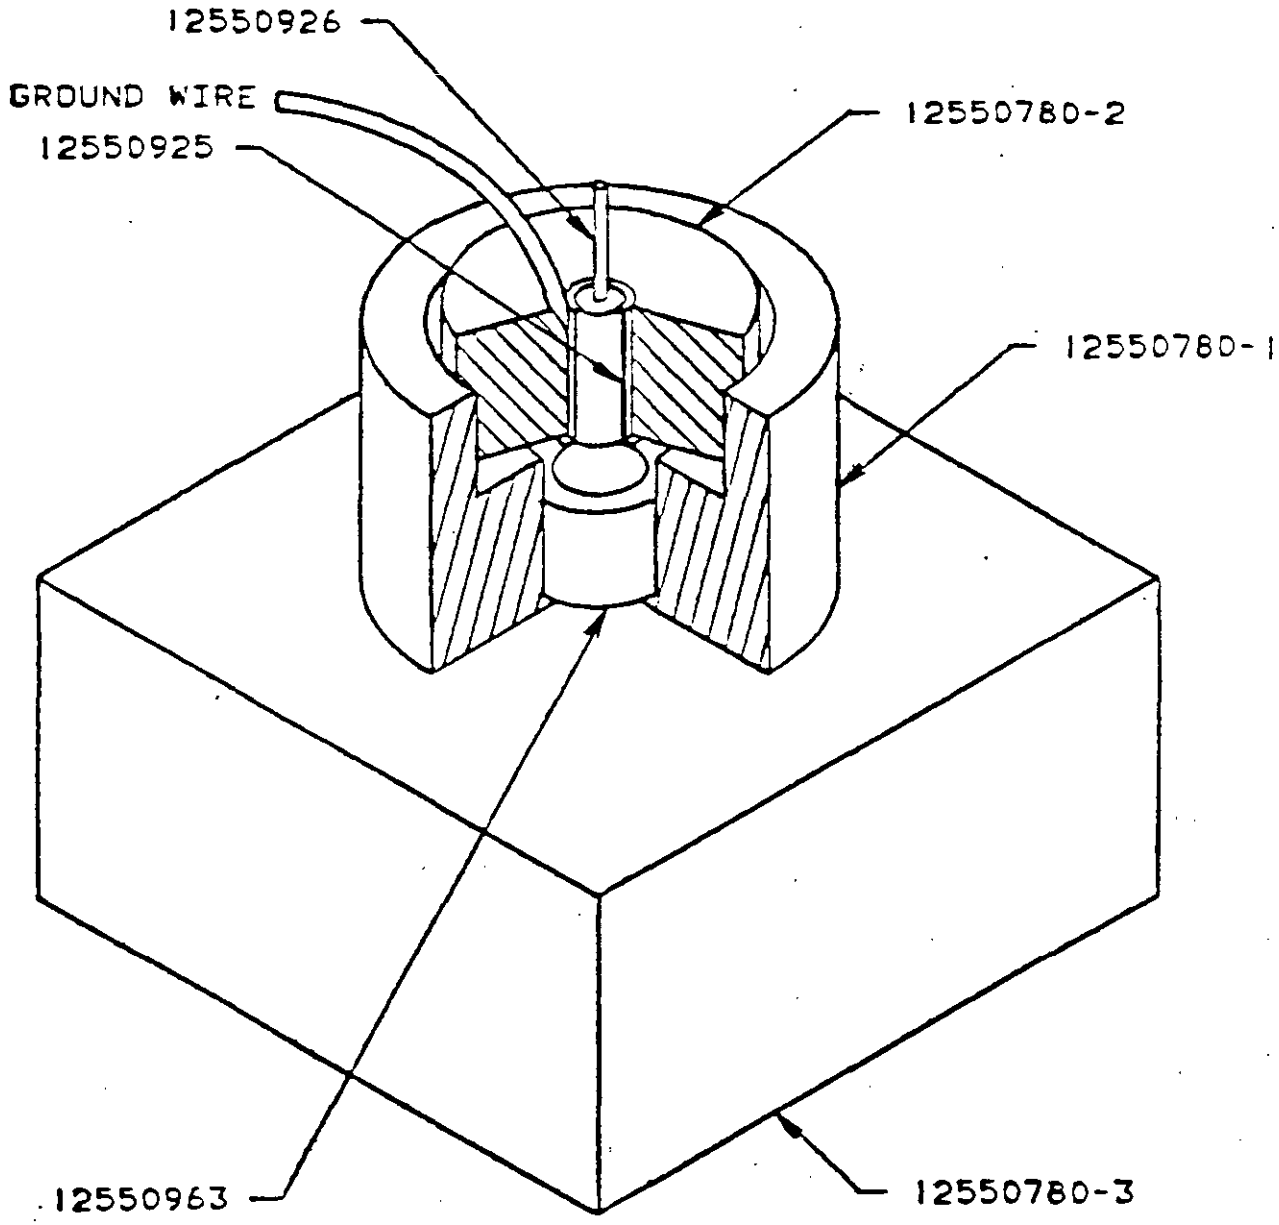

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

4.5.5 Conditioning and functioning.

4.5.5.1 Preparation of samples. Each lead to be subjected to the functioning test shall be assembled into an explosive lead test hardware (Dwg. 12550780-1) and staked in place. An electric detonator PA537 (Dwg. 12550926) shall be shorted and assembled as shown in the test assembly Figure 1.

4.5.5.2 Hot conditioning. The leads to be conditioned and functioned at hot temperature shall be prepared as specified in 4.5.5.1. They shall then be placed in a suitable temperature conditioning box and the temperature increased to 165 ± 5 degrees F with relative humidity not less than 15%. The rate of temperature increase shall not exceed 18 degrees F per minute. The samples shall be maintained at temperature for two (2) hours minimum.

The assemblies shall then be removed from the oven and functioned as specified in 4.5.4. Set-up time between removal from the oven and firing shall be five (5) minutes maximum.

Only the PA534 and the 12550780-1 shall be conditioned to 165 ± 5 degrees F. The remaining test hardware shall be maintained at a temperature of 70 degrees ± 10 degrees F for two (2) hours minimum prior to performing the functioning tests.

4.5.5.3 Cold conditioning. The lead cup assemblies to be conditioned and functioned at cold temperature shall be prepared as specified in 4.5.5.1. They shall then be placed in a suitable chamber and the temperature decreased to -65 ± 5 degrees F. The rate of decrease shall not exceed 18 degrees F per minute. The assemblies shall be conditioned at temperature for two (2) hours minimum. The assemblies shall then be removed from the chamber and functioned as specified in 4.5.4. Set-up time between removal from the chamber and firing shall be five (5) minutes maximum.

4.5.6 Waterproofness test. The leads shall be immersed in water at a depth of 2 inches minimum from the surface of the water to the top of the assemblies. The water temperature shall be maintained at 70 degrees ± 10 degrees F. After a minimum of 48 hours, the assemblies shall be removed from the water and subjected to the output test specified in 4.5.4. The functioning test of all samples shall be completed within four hours after the assemblies are removed from the water.

WARNING: The above tests are conducted on assemblies containing an explosive component. Test barricades (where used), procedures and equipment shall have prior approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Unit packaging.

5.1.1 Level A. Not Applicable.

5.1.2 Level B. Not Applicable.

5.1.3 Level C. The explosive leads shall be packaged in accordance with Dwg. 7548103 and 7548104.

5.1.3.1 Level C (Alternate). Packaging of explosive leads is permissible providing the explosive leads are packaged in accordance with MIL-STD-1190 and the applicable section(s) of the Code of Federal Regulations, Title 49.

Unless other packaging is used to provide barrier protection, the following instructions apply:

Each intermediate fiberboard box, set-up box or comparable container, after blunting corners, shall be placed in a water and vapor proof bag manufactured in accordance with Type I, Class E of MIL-B-117. The bag shall be closed. All excess air shall be exhausted from within the bag and the bag then sealed in accordance with the manufacturer's instructions. The seal shall be located at the edge of the bag to provide for a minimum of two (2) subsequent seals, if required. The seal shall comply with the heat seal requirements of MIL-P-116.

5.2 Packing.

5.2.1 Level A. Not Applicable.

5.2.2 Level B. Not Applicable.

5.2.3 Level C. The explosive leads shall be packed in accordance with Dwg. 12910005 and 12910007.

5.2.3.1 Level C (Alternate). A suitable number of explosive leads packaged as specified in 5.1.3.1 shall be packed in an outer box in accordance with MIL-STD-1190 and the applicable section(s) of Code of Federal Regulations, Title 49.

5.3 Marking.

5.3.1 Level A. Not Applicable.

5.3.2 Level B. Not Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

5.3.3 Level C. Each inner container and intermediate fiberboard box, set-up box or comparable container shall be printed, stamped or labeled and each barrier bag printed or stamped as required by Drawing 7548103, 7548104, and 12910007.

5.3.3.1 Level C (Alternate). Each inner container and intermediate fiberboard box, set-up box or comparable container as specified in 5.1.3.1 and 5.2.3.1 respectively shall be printed, stamped or labeled and each barrier bag printed or stamped as required by the applicable section(s) of Code of Federal Regulations, Title 49, and in accordance with MIL-STD-129, and the following information:


a. (Number) Explosive Lead, PA534: Lot Number.

b. All letters shall be upper case. Size of letters and numerals shall be a minimum of 1/4" high applied with black waterproof ink. Stencil ink shall conform to A-A-208.

c. Printing and labeling shall be commercial type. Labels shall be on white gummed paper.

d. Exterior boxes shall be marked in accordance with drawing 8796522. The DOT Designation shall be in accordance with U.S. Army ARDEC Hazard Classification Date statement. Apply appropriate label.

5.3.3.2 Performance oriented packaging marking. Apply POP markings on side of box opposite nomenclature:



4C1/Y*/S/**
USA/DOD/AYD

Note 1 -- *1/2 the weight of pack in pounds, plus 1.
Note 2 -- **Date packaged.

5.3.3.3 Unitization. Unitization shall be in accordance with MIL-STD-1190.

5.4 Packaging, packing and Marking for inert explosive lead parts. Packaging, packing and marking for Inert Explosive Lead parts shall be in accordance with MIL-STD-1169 for all applicable levels of packaging.

5.5 Shipping. When Explosive Lead from more than one lot are shipped at one time, each lot shall be kept separate and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

division between lots clearly indicated to prevent mixing of lots in transit.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Lead, Explosive, PA534 is intended for use in munition assemblies.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.1)

c. Requirements for submission of first article sample.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAR-I, Picatinny Arsenal, New Jersey 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Distribution of ammunition data cards, inspection and test results. Distribution of data cards, inspection and test results shall include the following: Commander, US Army Armament Research, Development and Engineering Center, ATTN: SMCAR-QAR-I, Picatinny Arsenal, New Jersey 07806-5000.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development, and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.6 Submission of alternative quality conformance provisions. All contractor proposed alternative quality conformance provisions will be submitted to the Government for evaluation/approval as directed by the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

6.7 Subject term (keyword) listing.

Moisture Content
Waterproofness

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1375-0008)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-F-70828A (AR)	940602

3. DOCUMENT TITLE LEAD, EXPLOSIVE, PA534 PARTS FOR AND LOADING, ASSEMBLING AND PACKING

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6675	(2) AUTOVON DSN-880-6675
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:08Z
Check the source to verify that this is the current version before use.