MILITARY SPECIFICATION

AUXILIARY CONTROL, VIDEO PL-1402/UA

This specification is approved for use by USAERADCOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of common module, Auxiliary Control, Video PL-1402/UA.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of
MIL-P-11268	- Parts, Materials, and Processes Used in Electronic Equipment
MIL-E-55585	- Electronic Equipment and Parts, Packaging of

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-252	- Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and Other Devices
MIL-STD-454	- Standard General Requirements for Electronic Equipment

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Hq, USA Electronics Research and Development Command, ATTN: DRDEL-E, 2800 Powder Mill Road, Adelphi, MD 20783 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

MIL-STD-726 - Packaging Requirement Codes
MIL-STD-810 - Environmental Test Methods

DRAWINGS

USA ELECTRONICS COMMAND

DLSM-B-773228 - Auxiliary Control, Video PL-1402/UA

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The Auxiliary Control, Video PL-1402/UA, referred to herein as the auxiliary control module, provides power regulation and auxiliary functions for other video processing electronics modules. The auxiliary control module functions provide interfaces between the system electronics and operator's controls such as contrast, brightness, polarity, and video gate.

3.2 Construction. The auxiliary control module shall be constructed in accordance with DLSM-B-773228 and as specified herein.

3.2.1 Weight. The weight of the auxiliary control module shall be 0.23, (+0.03 -0.05) pound.

3.3 First article. When specified in the contract (see 6.2) the contractor shall furnish first article units for inspection (see 4.3).

3.4 Materials, parts, and processes. Materials, parts, and processes shall be as specified herein and as shown on the applicable drawings. Materials, parts and processes not specified shall be selected by the contractor in accordance with MIL-P-11268.

3.5 Components. The auxiliary control module shall consist of a printed wiring board (multilayer), a connector, and discrete active and passive electronic components.

3.6 Performance characteristics.

3.6.1 Input power. The auxiliary control module shall operate from the supply voltages and current input power within the supply current limits as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

High power mode		Low power mode	
Supply voltage (Vdc)	Max supply current (mA)	Supply voltage (Vdc)	Max supply current (mA)
+10.0 ±0.2	660	+4.8 ±0.1	540
-7.5 ±0.2	660	-4.8 ±0.1	540
		+7.0 ±0.1	15
		-7.0 ±0.1	15

3.6.2 IR level and gate output. IR level and gate output shall be a rectangular waveform of +1.0, ±0.1 volt and 0 to -1.5, ±0.1 volts as shown in figure 1.

3.6.3 IR gain command voltages. The gain command voltage outputs for the auxiliary control module shall have a minimum adjustable range as listed:

Gain command voltages	High power mode	Low power mode
Gain command 1	Adjustable from -3.5 to +3.5 Vdc	Adjustable from -2.0 to +2.0 Vdc
Gain command 2	Adjustable from -3.5 to +3.5 Vdc	Adjustable from -2.0 to +2.0 Vdc

3.6.4 Regulator output voltages. The positive and negative regulator outputs shall have a minimum adjustable range as listed:

Regulator output voltages	High power mode	Low power mode
Positive regulator output	Adjustable from +3.0 to +4.5 Vdc	Adjustable from +3.0 to +3.5 Vdc
Negative regulator output	Adjustable from -3.0 to -4.5 Vdc	Adjustable from -3.0 to -3.5 Vdc

The positive and negative regulator output voltages, when fixed in the high power mode at +4.25 Vdc and -4.25 Vdc respectively, shall not vary by more than ±0.25 Vdc over the temperature range of -54°C to +71°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.6.5 IR polarity control outputs. IR polarity control outputs shall be +0.60, ±0.25 Vdc or -3.5, ±1.5 Vdc and shall be inverted with respect to each other.

3.6.6 Polarity transient suppression. Polarity transient suppression shall provide a gated level of +1.0, ±0.1 volt on the IR level and gate waveform for a duration of 140, ±40 milliseconds at each operation of polarity reversal.

3.6.7 Scan failure protect. The scan failure protect feature shall provide a continuous gated level of +1.0, ±0.1 volt on the IR level and gate waveform when a gate signal is not received for a duration of greater than 120, ±40 milliseconds.

3.7 Environmental conditions.

3.7.1 Temperature shock. The auxiliary control module shall not be damaged (see 6.3.1) by sudden changes in temperature between -54°C and +95°C.

3.7.2 High temperature. The auxiliary control module shall not be damaged by storage to +95°C or continuous operation to +71°C, and shall operate for 30 minutes at +95°C.

3.7.3 Low temperature. The auxiliary control module shall not be damaged by operation to -54°C or storage to -62°C.

3.7.4 Shock. The auxiliary control module shall not be damaged by high intensity shocks of 100 g's peak amplitude with 11 milliseconds duration and by bench handling tests.

3.7.5 Vibration. The auxiliary control module shall not be damaged by vibration over the frequency spectrum at the specified g levels and amplitudes shown in figure 2.

3.8 Reliability. The auxiliary control module shall have a mean time between failure (MTBF) of at least 17,500 hours, θ_o.

3.9 Coating. Unless otherwise specified, the auxiliary control module and its components and parts shall be cleaned and coated in accordance with the applicable drawing.

3.10 Preconditioning. Each auxiliary control module shall be subjected to at least a 20-cycle preconditioning environment as specified in figure 3 prior to group A inspection. (For exception to this requirement see 6.2.f.)

3.11 Soldering. Unless otherwise specified, soldering shall conform to MIL-STD-454, Requirement 5.

3.12 Nameplates and product marking. Unless otherwise specified, the auxiliary control module, parts, components, subassemblies, and assemblies thereof shall be marked for identification and reference designation markings in accordance with the applicable drawing.

3.13 Workmanship. Workmanship shall be in accordance with MIL-STD-454, Requirement 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.5).
c. Inspection of packaging (see 4.9).

4.3 First article inspection. When specified in the contract, first article inspection shall be performed by the contractor on a minimum of 3 sample units. First article reliability (4.8.1) is not required unless specified in the contract.

4.3.1 Inspections. All materials, parts, processes and assemblies shall be examined for conformance to the applicable specification or drawing. Inspections shall be made using MIL-STD-105, General Inspection Level II with a 2.5 percent AQL for mechanical and a 4 percent AQL for visual inspection, except as noted in table I.

TABLE I. Inspections.

Inspection Requirement	Percent AQL	Requirement paragraph	Inspection criteria
Any part or component missing or damaged	2.5	3.2, 3.4	MIL-STD-252
Weight not as specified	2.5	3.2.1	MIL-STD-252
Soldering not as specified	2.5	3.11	MIL-STD-454
Marking not as specified	2.5	3.12	
Workmanship not as specified	2.5	3.13	MIL-STD-454
Coating not as specified	2.5 1/	3.9	
Dimensions not as specified		3.2	SM-D-773888
Length	1.0		
Width	1.0		
Dimensions not as specified		3.2	SM-C-773501
Height, max	1.0		
Solder/lead protrusion	1.0		
Dimensions not as specified		3.2	SM-C-773541
Pins, connector location	1.0		
Pins, guide location	1.0		

1/ MIL-STD-105, Inspection Level S-3 or objective quality evidence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.3.2 Tests. Upon successful completion of inspections specified in 4.3.1, perform the tests of table II in any order. Failure of any test shall constitute failure of first article inspection.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Input power	3.6.1	4.6.1
IR level & gate output	3.6.2	4.6.2
IR gain command voltages	3.6.3	4.6.3
Regulator output voltages	3.6.4	4.6.4
IR polarity control outputs	3.6.5	4.6.5
Polarity transient suppression	3.6.6	4.6.6
Scan failure protect	3.6.7	4.6.7
Temperature shock	3.7.1	4.7.1
High temperature	3.7.2	4.7.2
Low temperature	3.7.3	4.7.3
Shock	3.7.4	4.7.4
Vibration	3.7.5	4.7.5
Reliability	3.8	4.8

4.3.3 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities (see 6.2.g).

4.4 Inspection procedures for quality assurance provisions. Unless otherwise specified herein:

a. The auxiliary control module shall be operated in the high power mode at an ambient temperature of +23°C, ±5°C.

b. The input power shall be in accordance with 3.6.1.

c. All test setup and load resistor tolerances shall be ±5 percent.

d. In the high power mode, the positive and negative voltage regulators shall be adjusted to an output voltage of +4.25, ±0.05 Vdc and -4.25, ±0.05 Vdc respectively.

e. In the low power mode, the positive and negative voltage regulators shall be adjusted to an output voltage of +3.25, ±0.05 Vdc and -3.25, ±0.05 Vdc respectively.

4.5 Quality conformance inspection.

4.5.1 Inspection. Inspection shall be as specified in 4.3.1.

4.5.2 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.5.2.1 Group A inspection. Group A inspection shall be conducted at an ambient temperature of +23°C, ±5°C on all auxiliary control modules following the preconditioning of 4.10 and the inspection of 4.5.1. Group A tests listed in table III may be performed in any order. Failure of any test shall be cause for rejection of that unit.

TABLE III. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Input power (high power mode only)	3.6.1	4.6.1
IR level & gate output	3.6.2	4.6.2
IR gain command voltages	3.6.3	4.6.3
Regulator output voltages	3.6.4	4.6.4
IR polarity control outputs	3.6.5	4.6.5

4.5.2.2 Group B inspection. Not required.

4.5.2.3 Group C inspection. Group C inspection shall be conducted on auxiliary control modules selected from units which have passed the tests in 4.5.2.1. The sample(s) shall be tested in accordance with the inspections listed in table IV. Samples shall be selected in accordance with 4.5.2.3.1. Group C tests listed in table IV may be performed in any order.

4.5.2.3.1 Sampling for group C inspection. Group C inspection samples shall be selected as follows:

Monthly lot size	Number of sample units monthly
1-99	1
100-299	3
300-499	5
500-999	7
1000 or more	10

TABLE IV. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Polarity transient suppression	3.6.6	4.6.6
Scan failure protect	3.6.7	4.6.7
Vibration	3.7.5	4.7.5

4.5.2.3.2 Group C failures. Actions required relative to group C failures shall be as specified in the contract (see 6.2).

4.5.2.3.3 Disposition of group C samples. Group C samples shall be accepted on contract subsequent to the tests of table III.

4.5.2.4 Group D inspection. Not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.6 Test methods.

4.6.1 Input power. The input power for both high power and low power modes shall be measured with 10-ohm resistors, rated at 2 watts minimum each, connected to each of the outputs of the on-board regulators. Failure to meet the requirements of 3.6.1 shall constitute failure of this test.

4.6.2 IR level and gate output. The IR level and gate output shall be measured with an oscilloscope. The gate input shall be a 60 Hz, 0 to -6 volt square wave signal (amplitude and duty cycle adjustable). The IR level input shall be varied with an external 10,000-ohm potentiometer. The waveform voltage limits shall be adjustable by potentiometers on the auxiliary control module. Failure to meet requirements of 3.6.2 shall constitute failure of this test.

4.6.3 IR gain command voltages. Gain command voltages 1 and 2 shall be monitored with an oscilloscope while the gain control input is varied through its limits. Failure to meet requirements of 3.6.3 shall constitute failure of this test.

4.6.4 Regulator output voltages. Regulator output voltages shall be determined using the conditions described in 4.6.1. The low power mode will require adjusting the positive and negative outputs from +3.0 Vdc to +3.5 Vdc and from -3.0 Vdc to -3.5 Vdc. The high power mode will require adjusting the positive and negative outputs from +3.0 Vdc to +4.5 Vdc and from -3.0 Vdc to -4.5 Vdc. Failure to meet requirements of 3.6.4 shall constitute failure of this test.

4.6.5 IR polarity control outputs. The IR polarity control outputs shall be measured with a voltmeter when the polarity control is switched from the inverting position to the noninverting position. Failure to meet requirements of 3.6.5 shall constitute failure of this test.

4.6.6 Polarity transient suppression. The polarity transient suppression feature shall be tested by monitoring the IR level and gate output on channel A and the polarity input on channel B of the dual-channel oscilloscope with storage capability. As the polarity input signal is switched, the duration of the gated portion of the IR level and gate waveform shall be measured and verified. Failure to meet requirements of 3.6.6 shall constitute failure of this test.

4.6.7 Scan failure protect. The scan failure protect feature shall be tested by monitoring the IR level and gate output on channel A and the IR gate input on channel B of the dual-channel oscilloscope. A square wave generator shall be used to provide the IR gate input, and its frequency shall be decreased to approximately 4 Hz to determine the threshold at which the IR level waveform begins to return to its gated state. The duration from IR gate input transition to the threshold of IR level and gate output shall be measured and verified. Failure to meet requirements of 3.6.7 shall constitute failure of this test.

4.7 Environmental tests. Unless otherwise specified, environmental tests shall be performed in accordance with MIL-STD-810. Unless otherwise specified, the operating tests required before, during, and after the environmental tests shall be those listed in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.7.1 Temperature shock. The auxiliary control module shall be tested in accordance with MIL-STD-810, Method 503, Procedure I except that the temperature of step 2 shall be -54°C and the temperature of step 1 and step 4 shall be +95°C. The auxiliary control module shall not be operated during temperature shock test (no measurements taken during this test). Failure to meet requirements of 3.7.1 shall constitute failure of this test.

4.7.2 High temperature. The auxiliary control module shall be tested in accordance with MIL-STD-810, Method 501, Procedure I (see figure 4) except that the temperature of step 2 shall be +95°C and the auxiliary control module shall be operated using the test setup of 4.6.1 for the final 30 minutes of step 3 (no measurements taken during step 3). The temperature of steps 4 and 5 shall be +71°C. The operating test of 4.6.4 shall be performed in place of the table III tests during the high temperature test. Failure to meet requirements of 3.7.2 shall constitute failure of this test.

4.7.3 Low temperature. The auxiliary control module shall be tested in accordance with MIL-STD-810, Method 502, Procedure I (see figure 5) except that the storage temperature of step 2 shall be -62°C and the low operating temperature of step 4 shall be -54°C. The operating test of 4.6.4 shall be performed in place of the table III tests during the low temperature test. Failure to meet requirements of 3.7.3 shall constitute failure of this test.

4.7.4 Shock. The auxiliary control module shall be tested in accordance with MIL-STD-810, Method 516.1, Procedure IV, Figure 516.1-1 (100 g's peak value at 11 milliseconds time duration) and Procedure V. The auxiliary control module shall not be operated during shock test (no measurements taken during this test). Failure to meet requirements of 3.7.4 shall constitute failure of this test.

4.7.5 Vibration. The auxiliary control module shall be tested in accordance with MIL-STD-810, Method 514.1, Procedures I and VIII except that the curve shown in figure 2 of this specification shall be used in lieu of the MIL-STD-810 curve. The sinusoidal cycle time shall be 120 minutes per axis. The dwell time shall be 1/6 of the cycling time at each resonance. The auxiliary control module shall not be operated during vibration test. Failure to meet requirements of 3.7.5 shall constitute failure of this test.

4.8 Reliability.

4.8.1 First article reliability. The lower test MTBF (θ_1) shall be demonstrated in accordance with the following subparagraphs.

4.8.1.1 Test level.

Temperature +50°C, (+5 -0)°C

Temperature cycling - None

Vibration - 2.2 g, ±10 percent peak acceleration value at any nonresonant frequency between 20 and 60 Hz measured at the mounting points of the equipment. The duration of vibration

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

shall be at least 10 minutes during each hour of equipment operating time. The vibration shall be perpendicular to the plane of the printed circuit board.

Equipment on-off cycling - Turn on and let temperature stabilize, hold for 3 hours, then turn off and let temperature stabilize. This cycle shall continue throughout the test.

4.8.1.2 Parameters. The discrimination ratio θ_o/θ_1 shall be 3.

4.8.1.3 Failure criteria and test length. The tests of table III shall be performed at least once prior to and once after the tests of 4.8.1.1. Additional testing of table III may be selected by the contractor. The results of all table III tests and any physical damage shall be used to determine the success or failure of the reliability test. In the event of a table III test failure, the time interval between the preceding successful test and the failure shall not contribute to the total cumulative hours. Testing shall continue until the total unit hours together with the total count of relevant equipment failures permit either an accept or reject decision in accordance with figure 6. Only equipment "on" time shall contribute to the total unit hours. No single equipment's "on" time shall be less than one-half the average operating time of all equipment on test.

4.9 Inspection of packaging. Packaging shall be inspected in accordance with MIL-P-116 to determine compliance with requirements of section 5.

4.10 Preconditioning. Each auxiliary control module, in a nonoperating mode, shall be subjected to at least 20 cycles as specified in figure 3. Preconditioning may be performed before or after conformal coating.

5. PACKAGING

5.1 Preservation. Preservation shall be as specified in MIL-STD-726, coded as follows:

5.1.1 Level A. 2M-1-1-ØØ-00-NV-X-XX-P-ED-A.

5.1.2 Level B. 1Ø-1-1-ØØ-00-NV-X-B7-P-ED-B.

5.2 Packing and marking. Packing and marking shall be in accordance with MIL-E-55585.

6. NOTES

6.1 Intended use. The auxiliary control module is intended for use in infrared systems.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. First article tests are required except for existing suppliers (see 6.3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

(1) Time frame for submission of first article test reports when first article tests are required.

(2) Time frame for approval of first article test reports when first article tests are required.

(3) First article reliability testing if required.

c. Production delivery schedule.

(1) Defined in terms of monthly lots.

(2) Actions required relative to group C failures (see 4.5.2.3.2).

d. Level A or level B preservation and packaging (see section 5).

e. MIL-STD-810B shall be used for environmental tests of 4.7.

f. The preconditioning requirement 3.10 and inspection 4.10 are required for procurement of all modules to this specification made directly for the Government. Implementation of 3.10 and 4.10 may be waived by systems contractors ordering modules to this specification for use in the manufacture of complete systems if these systems or subassemblies thereof are subjected to equivalent preconditioning.

g. Deliver all first article samples to Commander, USAERADCOM, ATTN: DELNV-CM, Fort Belvoir, VA 22060.

h. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

i. Group C inspection monthly sample size to be established based on cumulative totals of concurrent contracts.

6.3 Definitions.

6.3.1 Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component; and any degradation of auxiliary control module performance to values less than specified herein.

6.3.2 Existing suppliers. Suppliers who are currently supplying equipment to this specification with a minimum average monthly rate of 10 units per month over the most current 12-month period. If a supplier cannot maintain the minimum monthly average, a first article test (less reliability) performed annually shall sustain the existing supplier's status when performed on 3 units manufactured by the supplier explicitly for this test. Upon implementation of this specification, suppliers who are then supplying equipment to specification B2-28A050117, Auxiliary Control Video PL-1402/UA, with the minimum monthly delivery rate specified above shall be considered as existing suppliers.

CUSTODIAN:
Army - ER

PREPARING ACTIVITY:
Army - ER

Project 5855-A217

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

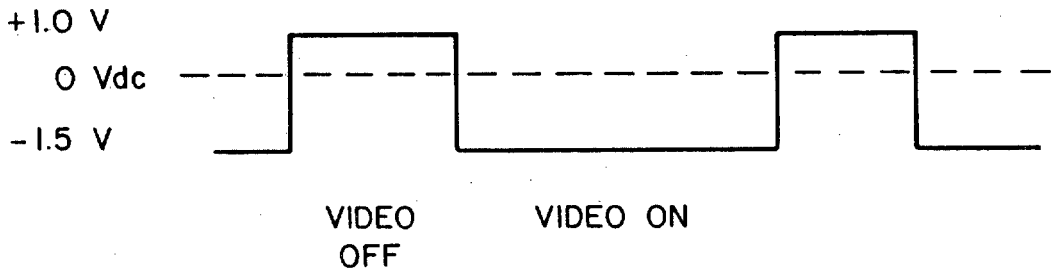


FIGURE 1. IR LEVEL AND GATE OUTPUT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

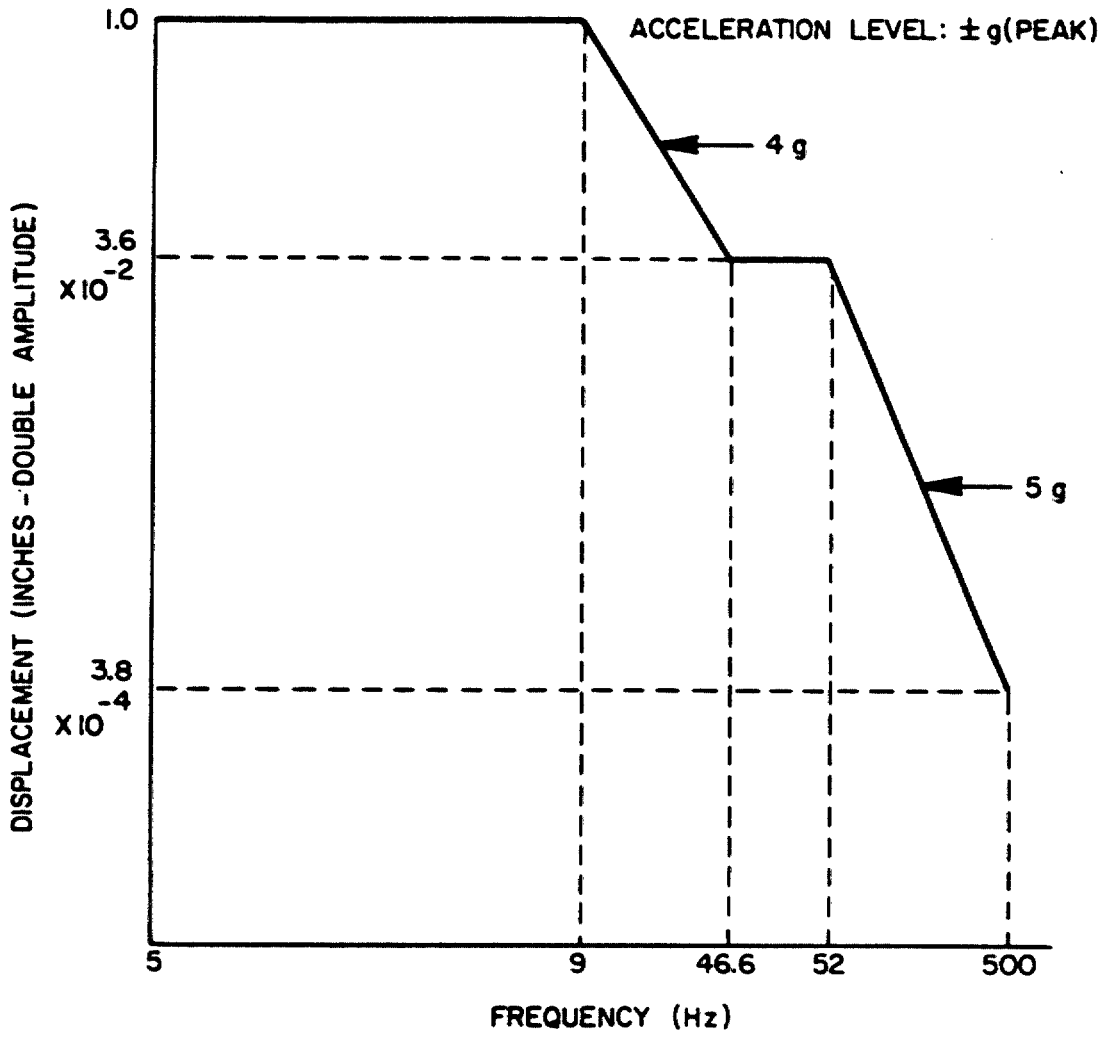


FIGURE 2. VIBRATION TEST PROFILE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.


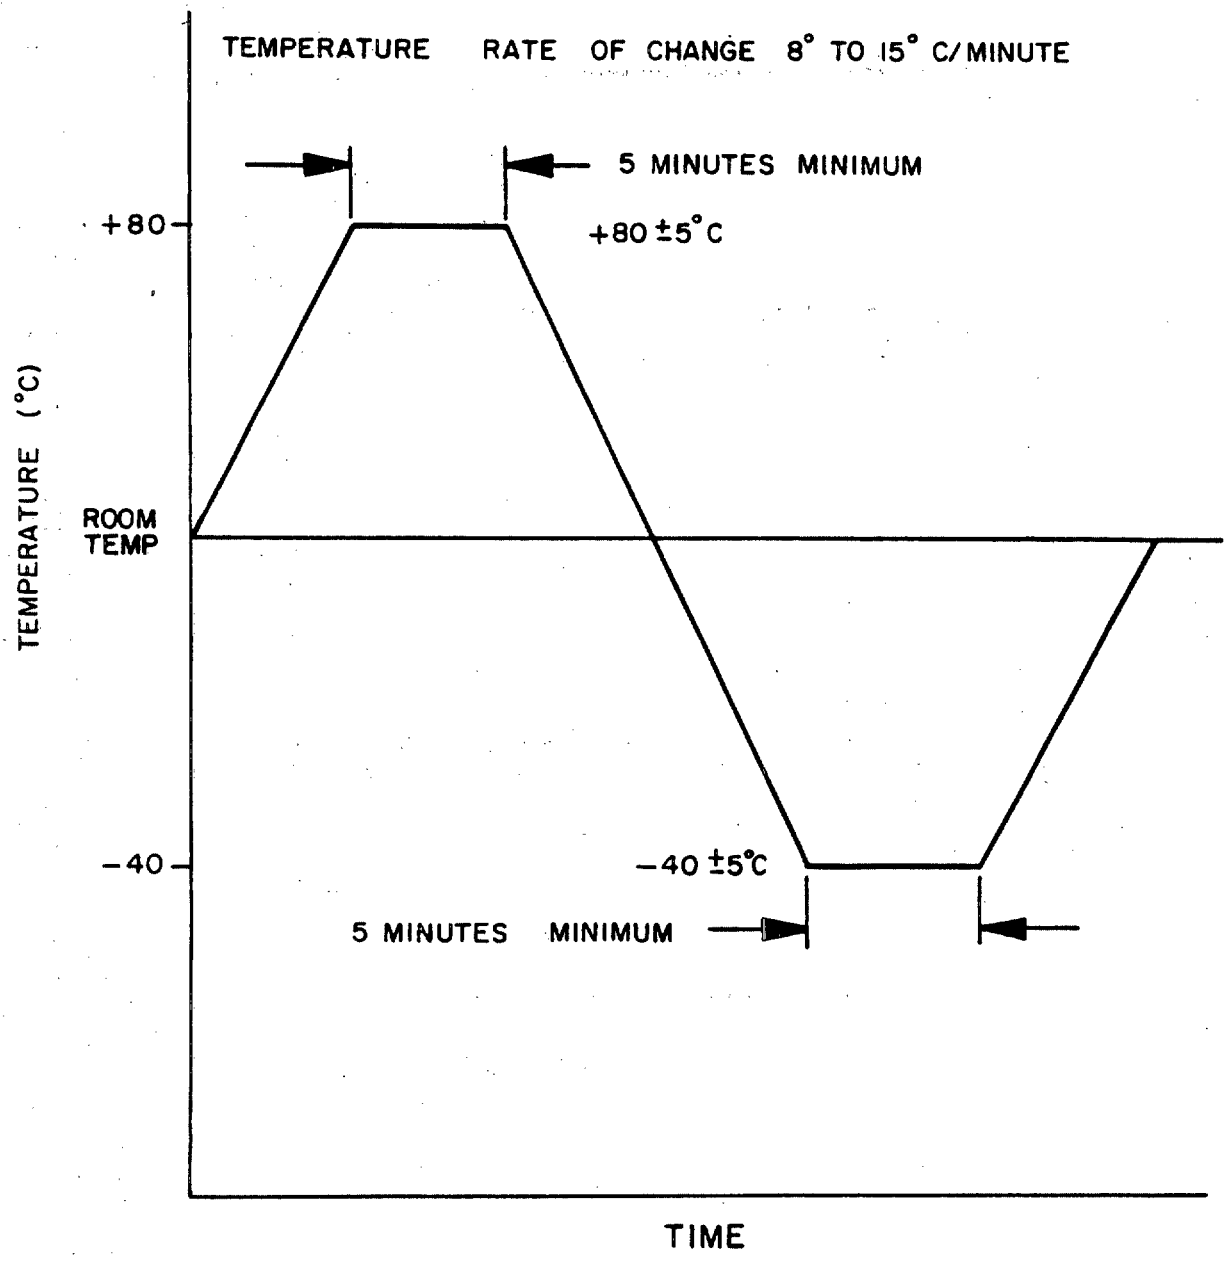


FIGURE 3. ONE PRECONDITIONING CYCLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

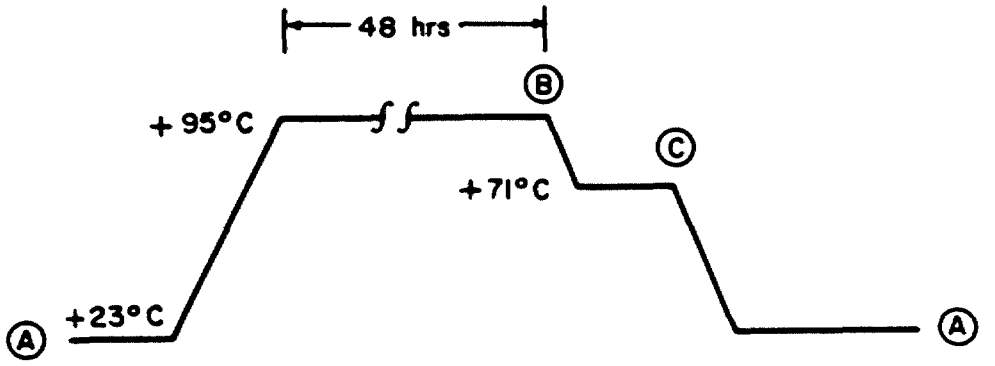


(A) GROUP A TESTS (TABLE III) ARE CONDUCTED AT THESE POINTS.

(B) TEST ITEM IS OPERATED FOR 30 MINUTES AT THIS POINT.

(C) REGULATOR OUTPUT VOLTAGES TESTS (4.6.4) ARE CONDUCTED AT THIS POINT.

FIGURE 4. HIGH TEMPERATURE TEST PROFILE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

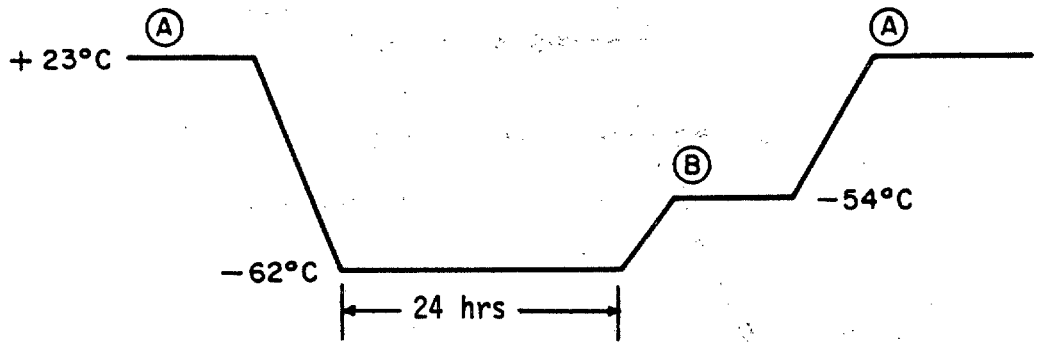


(A) GROUP A TESTS (TABLE III) ARE CONDUCTED AT THESE POINTS.

(B) REGULATOR OUTPUT VOLTAGES TESTS (4.6.4) ARE CONDUCTED AT THIS POINT.

FIGURE 5. LOW TEMPERATURE TEST PROFILE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

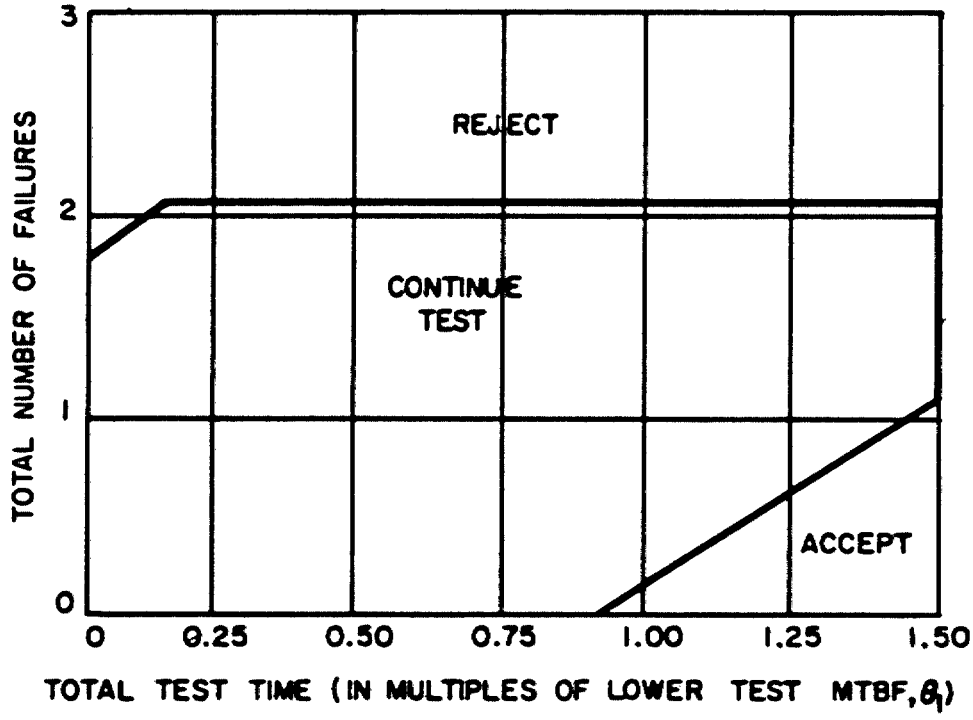

NUMBER OF FAILURES	TOTAL TEST TIME* REJECT (EQUAL OR LESS)	ACCEPT (EQUAL OR MORE)
0	NA	0.89
1	NA	1.44
2	0.12	1.50
3	1.50	NA

*TOTAL TEST TIME IS TOTAL UNIT HOURS OF EQUIPMENT "ON TIME" AND IS EXPRESSED IN MULTIPLES OF LOWER TEST MTBF, θ_1

FIGURE 6. FIRST ARTICLE RELIABILITY ACCEPT - REJECT CRITERIA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-H-49167M

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   [ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.