
MIL-C-55514/4C
9 September 1980
SUPERSEDING
MIL-C-0055514/4B(USAF)
10 October 1973, and
MIL-C-55514/4A
20 January 1971

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC DIELECTRIC, DC, IN NONMETAL CASES, ESTABLISHED RELIABILITY, STYLES CFR05 AND CFR06

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-55514.

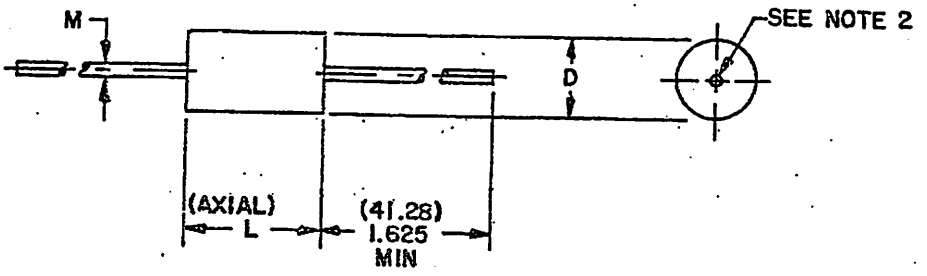


NOTES:
1. Dimensions are in inches.
2. Leads shall be of solid wire and located on centerline within ±.062 (1.57) but not less than .03 (.76) from edge of capacitor.
3. Millimeters are in parentheses.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Style CFR05 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the currenversion before use.

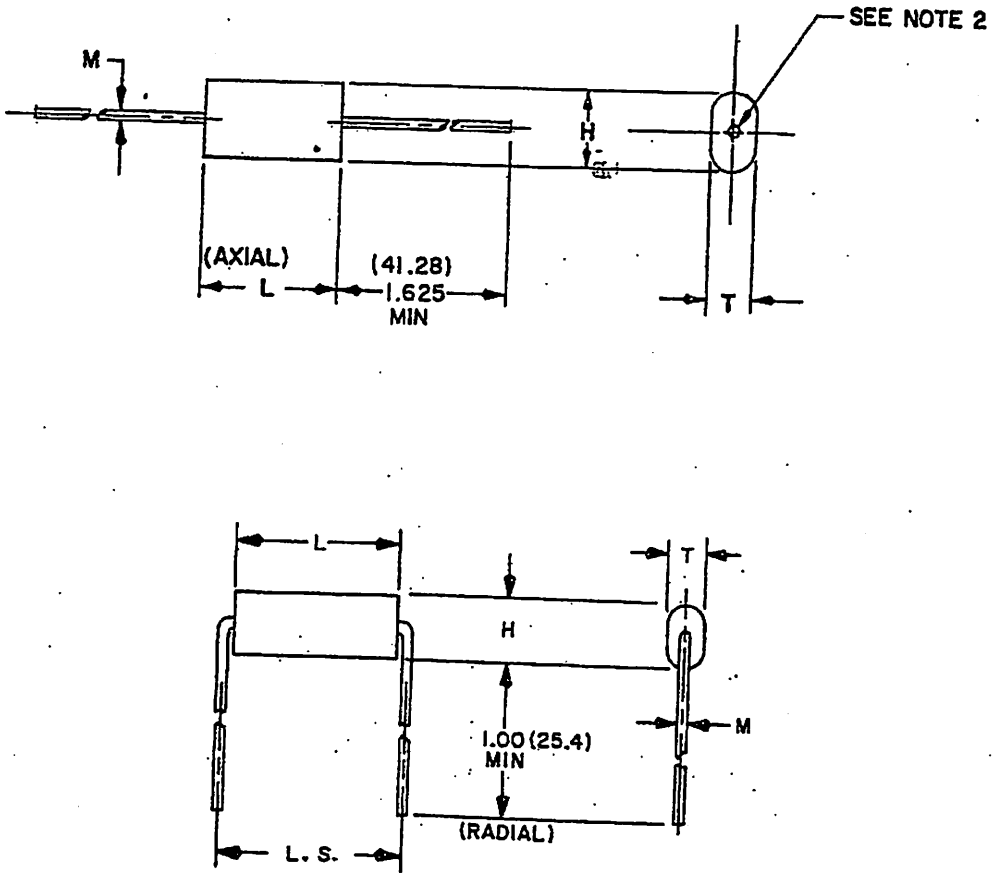

NOTES:
1. Dimensions are in inches.
2. Leads shall be of solid wire and located on centerline within ±.062 (1.57) but not less than .03 (.76) from edge of capacitor.
3. Millimeters are in parentheses.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Style CFR06 capacitors.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

CHARACTERISTICS R AND T, STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)		
				D ±.050 (1.27)	L ±.050 (1.27)	M 2/ Axial
	µF	volts, dc				
CFR05A-A102--	.0010	50	F, G, J, K	.150(3.81)	.400(10.16)	.020(.51)
CFR05A-A122--	.0012	50		.150	.400	.020
CFR05A-A152--	.0015	50		.150	.400	.020
CFR05A-A182--	.0018	50		.150	.400	.020
CFR05A-A222--	.0022	50		.150	.400	.020
CFR05A-A272--	.0027	50		.150	.400	.020
CFR05A-A332--	.0033	50		.150	.400	.020
CFR05A-A392--	.0039	50		.150	.400	.020
CFR05A-A472--	.0047	50		.150	.400	.020
CFR05A-A562--	.0056	50		.150	.400	.020
CFR05A-A682--	.0068	50		.150	.400	.020
CFR05A-A822--	.0082	50		.150	.400	.020
CFR05A-A103--	.010	50		.150	.400	.020
CFR05A-A123--	.012	50		.150	.400	.020
CFR05A-A153--	.015	50		.150	.400	.020
CFR05A-A183--	.018	50		.150	.400	.020
CFR05A-A223--	.022	50		.150	.400	.020
CFR05A-A273--	.027	50		.150	.400	.020
CFR05A-A333--	.033	50		.150	.400	.020
CFR05A-A393--	.039	50		.150	.400	.020
CFR05A-A473--	.047	50		.150	.400	.020
CFR05A-A563--	.056	50		.150	.400	.020
CFR05A-A683--	.068	50		.150	.400	.020
CFR05A-A823--	.082	50		.150	.400	.020
CFR05A-A104--	.10	50		.150	.400	.020
CFR05A-A124--	.12	50		.150(3.81)	.400(10.16)	.020
CFR05A-A154--	.15	50		.160(4.06)	.400(10.16)	.020
CFR05A-A184--	.18	50		.150(3.81)	.530(13.46)	.020
CFR05A-A224--	.22	50		.150(3.81)	.530	.020
CFR05A-A274--	.27	50		.160(4.06)	.530	.020
CFR05A-A334--	.33	50		.180(4.57)	.530	.020
CFR05A-A394--	.39	50		.190(4.83)	.530	.020
CFR05A-A474--	.47	50		.200(5.08)	.530	.020
CFR05A-A564--	.56	50		.220(5.59)	.530	.020
CFR05A-A684--	.68	50		.240(6.10)	.530	.020
CFR05A-A824--	.82	50		.260(6.60)	.530	.020
CFR05A-A105--	1.00	50		.280(7.11)	.530(13.46)	.020
CFR05A-A125--	1.20	50		.260(6.60)	.680(17.27)	.020
CFR05A-A155--	1.50	50		.280(7.11)	.680(17.27)	.020
CFR05A-A185--	1.80	50		.290(7.37)	.780(19.81)	.020
CFR05A-A205--	2.00	50		.300(7.62)	.780	.020
CFR05A-A255--	2.5	50		.340(8.64)	.780	.020(.51)
CFR05A-A305--	3.0	50		.370(9.40)	.780	.025(.64)
CFR05A-A355--	3.5	50		.400(10.16)	.780(19.81)	.025
CFR05A-A405--	4.0	50		.370(9.40)	.950(24.13)	.025
CFR05A-A455--	4.5	50		.390(9.91)	.950(24.13)	.025
CFR05A-A505--	5.0	50		.360(9.14)	1.170(28.73)	.025
CFR05A-A605--	6.0	50		.390(9.91)	1.170	.025
CFR05A-A805--	8.0	50		.450(11.43)	1.170	.025(.64)
CFR05A-A106--	10.0	50		.500(12.70)	1.170	.032(.81)
CFR05A-A126--	12.0	50		.540(13.72)	1.170	.032
CFR05A-A156--	15.0	50		.600(15.24)	1.170(28.73)	.032
CFR05A-A186--	18.0	50		.580(14.73)	1.450(36.83)	.032
CFR05A-A206--	20.0	50		.610(15.49)	1.450(36.83)	.032
CFR05A-A256--	25.0	50		.580(14.73)	1.900(48.20)	.032
CFR05A-A306--	30.0	50		.610(15.49)	1.900	.032
CFR05A-A356--	35.0	50		.660(16.76)	1.900	.032
CFR05A-A406--	40.0	50		.700(17.78)	1.900	.032
CFR05A-A506--	50.0	50	F, G, J, K	.780(19.81)	1.900(48.20)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches) D ±.050 (1.27)	L ±.050 (1.27)	M 2/ Axial
	µF	volts, dc				
CFR05A-B102--	.0010	100	F, G, J, K	.150(3.81)	.400(10.16)	.020(.51)
CFR05A-B122--	.0012	100		.150	.400	.020
CFR05A-B152--	.0015	100		.150	.400	.020
CFR05A-B182--	.0018	100		.150	.400	.020
CFR05A-B222--	.0022	100		.150	.400	.020
CFR05A-B272--	.0027	100		.150	.400	.020
CFR05A-B332--	.0033	100		.150	.400	.020
CFR05A-B392--	.0039	100		.150	.400	.020
CFR05A-B472--	.0047	100		.150	.400	.020
CFR05A-B562--	.0056	100		.150	.400	.020
CFR05A-B682--	.0068	100		.150	.400	.020
CFR05A-B822--	.0082	100		.150	.400	.020
CFR05A-B103--	.010	100		.150	.400	.020
CFR05A-B123--	.012	100		.150	.400	.020
CFR05A-B153--	.015	100		.150	.400	.020
CFR05A-B183--	.018	100		.150	.400	.020
CFR05A-B223--	.022	100		.150	.400	.020
CFR05A-B273--	.027	100		.150	.400	.020
CFR05A-B333--	.033	100		.150	.400	.020
CFR05A-B393--	.039	100		.150	.400	.020
CFR05A-B473--	.047	100		.150	.400	.020
CFR05A-B563--	.056	100		.150(3.81)	.400	.020
CFR05A-B683--	.068	100		.160(4.06)	.400	.020
CFR05A-B823--	.082	100		.180(4.57)	.400(10.16)	.020
CFR05A-B104--	.10	100		.150(3.81)	.530(13.46)	.020
CFR05A-B124--	.12	100		.160(4.06)	.530	.020
CFR05A-B154--	.15	100		.170(4.32)	.530	.020
CFR05A-B184--	.18	100		.190(4.83)	.530	.020
CFR05A-B224--	.22	100		.200(5.08)	.530	.020
CFR05A-B274--	.27	100		.220(5.59)	.530	.020
CFR05A-B334--	.33	100		.240(6.10)	.530	.020
CFR05A-B394--	.39	100		.260(6.60)	.530	.020
CFR05A-B474--	.47	100		.290(7.37)	.530(13.46)	.020
CFR05A-B564--	.56	100		.260(6.60)	.680(17.27)	.020
CFR05A-B684--	.68	100		.290(7.37)	.680(17.27)	.020
CFR05A-B824--	.82	100		.290(7.37)	.780(19.81)	.020
CFR05A-B105--	1.00	100		.310(7.87)	.780	.020
CFR05A-B125--	1.20	100		.340(8.64)	.780	.020(.51)
CFR05A-B155--	1.50	100		.370(9.40)	.780(19.81)	.025(.64)
CFR05A-B185--	1.80	100		.370(9.40)	.950(24.13)	.025
CFR05A-B205--	2.00	100		.400(10.16)	.950(24.13)	.025
CFR05A-B255--	2.5	100		.380(9.65)	1.170(28.73)	.025
CFR05A-B305--	3.0	100		.420(10.67)	1.170	.025
CFR05A-B355--	3.5	100		.450(11.43)	1.170	.025(.64)
CFR05A-B405--	4.0	100		.480(12.19)	1.170	.032(.81)
CFR05A-B455--	4.5	100		.520(13.21)	1.170	.032
CFR05A-B505--	5.0	100		.550(13.97)	1.170	.032
CFR05A-B605--	6.0	100		.580(14.73)	1.170	.032
CFR05A-B805--	8.0	100		.620(15.75)	1.170(28.73)	.032
CFR05A-B106--	10.0	100		.630(16.00)	1.450(36.83)	.032
CFR05A-B126--	12.0	100		.640(16.26)	1.700(43.18)	.032
CFR05A-B156--	15.0	100		.650(16.51)	1.900(48.20)	.032
CFR05A-B186--	18.0	100		.720(18.29)	1.900(48.20)	.032
CFR05A-B206--	20.0	100	F, G, J, K	.780(19.81)	1.900(48.20)	.032
				.820(20.83)	1.900(48.20)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)		
				D 3/	L ± .062(1.57)	M 2/ Axial
	µF	volts, dc				
CFR05A-C103--	.010	200	F, G, J, K	.176(4.47)	.469(11.91)	.025(.64)
CFR05A-C123--	.012	200		.187(4.75)	.469(11.91)	.025(.64)
CFR05A-C153--	.015	200		.203(5.16)	.469(11.91)	.025(.64)
CFR05A-C183--	.018	200		.217(5.51)	.469(11.91)	.025(.64)
CFR05A-C223--	.022	200		.235(5.97)	.469(11.91)	.025(.64)
CFR05A-C273--	.027	200		.255(6.48)	.469(11.91)	.025(.64)
CFR05A-C333--	.033	200		.277(7.04)	.469(11.91)	.025(.64)
CFR05A-C393--	.039	200		.298(7.57)	.469(11.91)	.025(.64)
CFR05A-C473--	.047	200		.313(7.95)	.469(11.91)	.025(.64)
CFR05A-C563--	.056	200		.244(6.20)	.656(16.66)	.025(.64)
CFR05A-C683--	.068	200		.264(6.71)	.656(16.66)	.025(.64)
CFR05A-C823--	.082	200		.285(7.24)	.656(16.66)	.025(.64)
CFR05A-C104--	.10	200		.310(7.87)	.656(16.66)	.025(.64)
CFR05A-C124--	.12	200		.366(9.30)	.656(16.66)	.032(.81)
CFR05A-C154--	.15	200		.304(7.72)	.781(19.84)	.025(.64)
CFR05A-C184--	.18	200		.329(8.36)	.781(19.84)	.032(.81)
CFR05A-C224--	.22	200		.359(9.12)	.781(19.84)	.032(.81)
CFR05A-C274--	.27	200		.393(9.98)	.781(19.84)	.032(.81)
CFR05A-C334--	.33	200		.431(10.95)	.781(19.84)	.032(.81)
CFR05A-C394--	.39	200		.363(9.22)	1.031(26.19)	.032(.81)
CFR05A-C474--	.47	200		.395(10.03)	1.031(26.19)	.032(.81)
CFR05A-C564--	.56	200		.427(10.85)	1.031(26.19)	.032(.81)
CFR05A-C684--	.68	200		.467(11.86)	1.031(26.19)	.032(.81)
CFR05A-C824--	.82	200		.509(12.93)	1.031(26.19)	.032(.81)
CFR05A-C105--	1.00	200		.574(14.58)	1.031(26.19)	.032(.81)
CFR05A-C125--	1.20	200		.624(15.85)	1.031(26.19)	.032(.81)
CFR05A-C155--	1.50	200		.520(13.21)	1.531(38.89)	.032(.81)
CFR05A-C185--	1.80	200		.579(14.71)	1.531(38.89)	.032(.81)
CFR05A-C205--	2.00	200		.607(15.42)	1.531(38.89)	.032(.81)
CFR05A-C255--	2.5	200		.670(17.02)	1.531(38.89)	.032(.81)
CFR05A-C305--	3.0	200		.727(18.47)	1.531(38.89)	.032(.81)
CFR05A-C355--	3.5	200		.779(19.79)	1.531(38.89)	.032(.81)
CFR05A-C405--	4.0	200		.828(21.03)	1.531(38.89)	.032(.81)
CFR05A-C455--	4.5	200		.796(20.22)	1.781(45.24)	.032(.81)
CFR05A-C505--	5.0	200		.835(21.21)	1.781(45.24)	.032(.81)
CFR05A-C755--	7.5	200		.870(22.10)	2.281(57.94)	.032(.81)
CFR05A-C106--	10.0	200	F, G, J, K	.995(25.27)	2.281(57.94)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)		
				D 3/	L±.062(1.57)	M 2/ Axial
	µF	volts, dc				
CFR05A-E103--	.010	400	F, G, J, K	.301(7.65)	.469(11.91)	.025(.64)
CFR05A-E123--	.012	400		.325(8.26)	.469(11.91)	.032(.81)
CFR05A-E153--	.015	400		.251(6.38)	.656(16.66)	.025(.64)
CFR05A-E183--	.018	400		.270(6.86)	.656(16.66)	.025(.64)
CFR05A-E223--	.022	400		.294(7.47)	.656(16.66)	.025(.64)
CFR05A-E273--	.027	400		.321(8.15)	.656(16.66)	.032(.81)
CFR05A-E333--	.033	400		.350(8.89)	.656(16.66)	.032(.81)
CFR05A-E393--	.039	400		.377(9.58)	.656(16.66)	.032(.81)
CFR05A-E473--	.047	400		.335(8.51)	.781(19.84)	.032(.81)
CFR05A-E563--	.056	400		.367(9.32)	.781(19.84)	.032(.81)
CFR05A-E683--	.068	400		.395(10.03)	.781(19.84)	.032(.81)
CFR05A-E823--	.082	400		.429(10.90)	.781(19.84)	.032(.81)
CFR05A-E104--	.10	400		.367(9.32)	1.031(26.19)	.032(.81)
CFR05A-E124--	.12	400		.399(10.13)	1.031(26.19)	.032(.81)
CFR05A-E154--	.15	400		.441(11.20)	1.031(26.19)	.032(.81)
CFR05A-E184--	.18	400		.479(12.17)	1.031(26.19)	.032(.81)
CFR05A-E224--	.22	400		.414(10.52)	1.531(38.89)	.032(.81)
CFR05A-E274--	.27	400		.451(11.46)	1.531(38.89)	.032(.81)
CFR05A-E334--	.33	400		.491(12.47)	1.531(38.89)	.032(.81)
CFR05A-E394--	.39	400		.529(13.44)	1.531(38.89)	.032(.81)
CFR05A-E474--	.47	400		.590(14.99)	1.531(38.89)	.032(.81)
CFR05A-E564--	.56	400		.638(16.21)	1.531(38.89)	.032(.81)
CFR05A-E684--	.68	400		.695(17.65)	1.531(38.89)	.032(.81)
CFR05A-E824--	.82	400		.757(19.23)	1.531(38.89)	.032(.81)
CFR05A-E105--	1.00	400		.828(21.03)	1.531(38.89)	.032(.81)
CFR05A-E125--	1.20	400		.901(22.89)	1.531(38.89)	.032(.81)
CFR05A-E155--	1.50	400		.909(23.09)	1.781(45.24)	.032(.81)
CFR05A-E185--	1.80	400		.989(25.12)	1.781(45.24)	.032(.81)
CFR05A-E205--	2.00	400		1.039(26.39)	1.781(45.24)	.032(.81)
CFR05A-E255--	2.5	400		.995(25.27)	2.281(57.94)	.032(.81)
CFR05A-E305--	3.0	400		1.084(27.53)	2.281(57.94)	.032(.81)
CFR05A-E355--	3.5	400		1.166(29.62)	2.281(57.94)	.032(.81)
CFR05A-E405--	4.0	400		1.242(31.55)	2.281(57.94)	.032(.81)
CFR05A-E455--	4.5	400		1.236(31.39)	2.531(64.29)	.032(.81)
CFR05A-E505--	5.0	400	F, G, J, K	1.300(33.02)	2.531(64.29)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR06 CAPACITORS								
Type designation 4/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.050(1.27)	H ±.050(1.27)	L +.050(1.27) -.005(.13)	L.S. ±.030(.76)	M 2/ Radial and axial
	µF	volts, dc						
CFR06--A102--	.0010	50	F,G,J,K	.090(2.29)	.180(4.57)	.384(9.75)	.400(10.16)	.016(.41)
CFR06--A122--	.0012	50		.090	.180	.384	.400	.016
CFR06--A152--	.0015	50		.090	.180	.384	.400	.016
CFR06--A182--	.0018	50		.090	.180	.384	.400	.016
CFR06--A222--	.0022	50		.090	.180	.384	.400	.016
CFR06--A272--	.0027	50		.090	.180	.384	.400	.016
CFR06--A332--	.0033	50		.090	.180	.384	.400	.016
CFR06--A392--	.0039	50		.090	.180	.384	.400	.016
CFR06--A472--	.0047	50		.090	.180	.384	.400	.016
CFR06--A562--	.0056	50		.090	.180	.384	.400	.016
CFR06--A682--	.0068	50		.090	.180	.384	.400	.016
CFR06--A822--	.0082	50		.090	.180	.384	.400	.016
CFR06--A103--	.010	50		.090	.180	.384	.400	.016
CFR06--A123--	.012	50		.090	.180	.384	.400	.016
CFR06--A153--	.015	50		.090	.180	.384	.400	.016
CFR06--A183--	.018	50		.090	.180	.384	.400	.016
CFR06--A223--	.022	50		.090	.180	.384	.400	.016
CFR06--A273--	.027	50		.090	.180	.384	.400	.016
CFR06--A333--	.033	50		.090	.180	.384	.400	.016
CFR06--A393--	.039	50		.090	.180	.384	.400	.016
CFR06--A473--	.047	50		.090	.180	.384	.400	.016
CFR06--A563--	.056	50		.090	.180	.384	.400	.016
CFR06--A683--	.068	50		.090	.180	.384	.400	.016
CFR06--A823--	.082	50		.090	.180	.384	.400	.016
CFR06--A104--	.10	50		.090	.180	.384	.400	.016
CFR06--A124--	.12	50		.090	.180	.384	.400	.016
CFR06--A154--	.15	50		.090(2.29)	.180(4.57)	.384	.400	.016
CFR06--A184--	.18	50		.100(2.54)	.200(5.08)	.384(9.75)	.400(10.16)	.016
CFR06--A224--	.22	50		.090(2.29)	.180(4.57)	.514(13.06)	.530(13.46)	.016
CFR06--A274--	.27	50		.090(2.29)	.180(4.57)	.514(13.06)	.530	.016
CFR06--A334--	.33	50		.100(2.54)	.190(4.83)	.514(13.06)	.530	.016
CFR06--A394--	.39	50		.110(2.79)	.210(5.33)	.510(12.95)	.530	.016(.41)
CFR06--A474--	.47	50	F,G,J,K,	.130(3.30)	.220(5.59)	.510(12.95)	.530	.020(.51)
				.140(3.56)	.240(6.10)	.510(12.95)	.530(13.46)	.020(.51)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR06 CAPACITORS								
Type designation 4/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.050(1.27)	H ±.050(1.27)	L +.050(1.27) -.005(.13)	L.S. ±.030(.76)	M 2/ Radial and axial
	µF	volts, dc						
CFR06--A564--	.56	50	F,G,J,K	.160(4.06)	.250(6.35)	.510(12.95)	.530(13.46)	.020(.51)
CFR06--A684--	.68	50		.180(4.57)	.270(6.86)	.510	.530	.020
CFR06--A824--	.82	50		.200(5.08)	.290(7.37)	.510	.530	.020
CFR06--A105--	1.00	50		.220(5.59)	.320(8.13)	.510(12.95)	.530(13.46)	.020
CFR06--A125--	1.20	50		.200(5.08)	.290(7.37)	.660(16.76)	.680(17.27)	.020
CFR06--A155--	1.50	50		.220(5.59)	.320(8.13)	.660(16.76)	.680(17.27)	.020
CFR06--A185--	1.80	50		.230(5.84)	.320(8.13)	.760(19.30)	.780(19.81)	.020
CFR06--A205--	2.00	50		.240(6.10)	.340(8.64)	.760(19.30)	.780	.020
CFR06--A255--	2.50	50		.280(7.11)	.370(9.40)	.760(19.30)	.780	.020(.51)
CFR06--A305--	3.00	50		.310(7.87)	.410(10.41)	.755(19.18)	.780	.025(.64)
CFR06--A355--	3.50	50		.340(8.64)	.430(10.92)	.755(19.18)	.780(19.81)	.025
CFR06--A405--	4.00	50		.310(7.87)	.400(10.16)	.925(23.50)	.950(24.13)	.025
CFR06--A455--	4.50	50		.330(8.38)	.420(10.67)	.925(23.50)	.950(24.13)	.025
CFR06--A505--	5.00	50		.250(6.35)	.420(10.67)	1.145(29.08)	1.170(28.73)	.025
CFR06--A605--	6.00	50		.280(7.11)	.450(11.43)	1.145(29.08)	1.170	.025
CFR06--A805--	8.00	50		.340(8.64)	.500(12.70)	1.145(29.08)	1.170	.025(.64)
CFR06--A106--	10.00	50		.390(9.91)	.560(14.22)	1.138(28.91)	1.170	.032(.81)
CFR06--A126--	12.00	50		.430(10.92)	.600(15.24)	1.138(28.91)	1.170	.032
CFR06--A156--	15.00	50		.490(12.45)	.660(16.76)	1.138(28.91)	1.170(28.73)	.032
CFR06--A186--	18.00	50		.470(11.94)	.640(16.26)	1.418(36.02)	1.450(36.83)	.032
CFR06--A206--	20.00	50		.500(12.70)	.670(17.02)	1.418(36.02)	1.450(36.83)	.032
CFR06--A256--	25.00	50		.500(12.70)	.670(17.02)	1.868(47.45)	1.900(48.20)	.032
CFR06--A306--	30.00	50		.560(14.22)	.730(18.54)	1.868	1.900(48.20)	.032
CFR06--A356--	35.00	50		.590(14.99)	.760(19.30)	1.868	1.900(48.20)	.032
CFR06--A406--	40.00	50		.660(16.76)	.830(21.08)	1.868	1.900(48.20)	.032
CFR06--A506--	50.00	50	F,G,J,K	.750(19.05)	.910(23.11)	1.868(47.45)	1.900(48.20)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR06 CAPACITORS								
Type designation 1/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.050(1.27)	H ±.050(1.27)	L +.050(1.27) -.005(.13)	L.S. ±.030(.76)	M 2/ Radial and axial
	µF	volts, dc						
CFR06--B102--	.0010	100	F,G,J,K	.090(2.29)	.180(4.57)	.384(9.75)	.400(10.16)	.016(.41)
CFR06--B122--	.0012	100		.090	.180	.384	.400	.016
CFR06--B152--	.0015	100		.090	.180	.384	.400	.016
CFR06--B182--	.0018	100		.090	.180	.384	.400	.016
CFR06--B222--	.0022	100		.090	.180	.384	.400	.016
CFR06--B272--	.0027	100		.090	.180	.384	.400	.016
CFR06--B332--	.0033	100		.090	.180	.384	.400	.016
CFR06--B392--	.0039	100		.090	.180	.384	.400	.016
CFR06--B472--	.0047	100		.090	.180	.384	.400	.016
CFR06--B562--	.0056	100		.090	.180	.384	.400	.016
CFR06--B682--	.0068	100		.090	.180	.384	.400	.016
CFR06--B822--	.0082	100		.090	.180	.384	.400	.016
CFR06--B103--	.010	100		.090	.180	.384	.400	.016
CFR06--B123--	.012	100		.090	.180	.384	.400	.016
CFR06--B153--	.015	100		.090	.180	.384	.400	.016
CFR06--B183--	.018	100		.090	.180	.384	.400	.016
CFR06--B223--	.022	100		.090	.180	.384	.400	.016
CFR06--B273--	.027	100		.090	.180	.384	.400	.016
CFR06--B333--	.033	100		.090	.180	.384	.400	.016
CFR06--B393--	.039	100		.090	.180	.384	.400	.016
CFR06--B473--	.047	100		.090	.180	.384	.400	.016
CFR06--B563--	.056	100		.090(2.29)	.180(4.57)	.384	.400	.016
CFR06--B683--	.068	100		.100(2.54)	.190(4.83)	.384	.400	.016
CFR06--B823--	.082	100		.110(2.79)	.210(5.33)	.384(9.75)	.400(10.16)	.016
CFR06--B104--	.10	100		.090(2.29)	.180(4.57)	.514(13.06)	.530(13.46)	.016
CFR06--B124--	.12	100		.100(2.54)	.190(4.83)	.514(13.06)	.530	.016
CFR06--B154--	.15	100		.110(2.79)	.200(5.08)	.514(13.06)	.530	.016(.41)
CFR06--B184--	.18	100		.120(3.05)	.220(5.59)	.510(12.95)	.530	.020(.51)
CFR06--B224--	.22	100		.140(3.56)	.230(5.84)	.510	.530	.020
CFR06--B274--	.27	100		.160(4.06)	.250(6.35)	.510	.530	.020
CFR06--B334--	.33	100		.180(4.57)	.280(7.11)	.510	.530	.020
CFR06--B394--	.39	100	F,G,J,K	.200(5.08)	.300(7.62)	.510	.530	.020
				.230(5.84)	.320(8.13)	.510(12.95)	.530(13.46)	.020(.51)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the currentversion before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R AND T, STYLE CFR06 CAPACITORS								
Type designation 4/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.050(1.27)	H ±.050(1.27)	L +.050(1.27) -.005(.13)	L.S. ±.030(.76)	M 2/ Radial and axial
	µF	volts, dc						
CFR06--B474--	.47	100	F,G,J,K	.200(5.08)	.300(7.62)	.660(16.76)	.680(17.27)	.020(.51)
CFR06--B564--	.56	100		.230(5.84)	.320(8.13)	.660(16.76)	.680(17.27)	.020
CFR06--B684--	.68	100		.230(5.84)	.320(8.13)	.760(19.30)	.780(19.81)	.020
CFR06--B824--	.82	100		.250(6.35)	.350(8.89)	.760(19.30)	.780(19.81)	.020
CFR06--B105--	1.00	100		.280(7.11)	.380(9.65)	.760(19.30)	.780(19.81)	.020(.51)
CFR06--B125--	1.20	100		.310(7.87)	.410(10.41)	.755(19.18)	.780(19.81)	.025(.64)
CFR06--B155--	1.50	100		.310(7.87)	.400(10.16)	.925(23.50)	.950(24.13)	.025
CFR06--B185--	1.80	100		.340(8.64)	.430(10.92)	.925(23.50)	.950(24.13)	.025
CFR06--B205--	2.00	100		.270(6.86)	.440(11.18)	1.145(29.08)	1.170(28.73)	.025
CFR06--B255--	2.50	100		.310(7.87)	.480(12.19)	1.145(29.08)	1.170	.025(.64)
CFR06--B305--	3.00	100		.350(8.89)	.510(12.95)	1.138(28.91)	1.170	.032(.81)
CFR06--B355--	3.50	100		.380(9.65)	.550(13.97)	1.138	1.170	.032
CFR06--B405--	4.00	100		.410(10.41)	.580(14.73)	1.138	1.170	.032
CFR06--B455--	4.50	100		.440(11.18)	.610(15.49)	1.138	1.170	.032
CFR06--B505--	5.00	100		.470(11.94)	.630(16.00)	1.138	1.170	.032
CFR06--B605--	6.00	100		.520(13.21)	.680(17.27)	1.138(28.91)	1.170(28.73)	.032
CFR06--B805--	8.00	100		.530(13.46)	.690(17.53)	1.418(36.02)	1.450(36.83)	.032
CFR06--B106--	10.00	100		.540(13.72)	.700(17.78)	1.668(42.37)	1.700(43.18)	.032
CFR06--B126--	12.00	100		.540(13.72)	.700(17.78)	1.868(47.45)	1.900(48.20)	.032
CFR06--B156--	15.00	100		.610(15.49)	.780(19.81)	1.868	1.900	.032
CFR06--B186--	18.00	100		.680(17.27)	.840(21.34)	1.868	1.900	.032
CFR06--B206--	20.00	100	F,G,J,K	.720(18.29)	.880(22.35)	1.868(47.45)	1.900(48.20)	.032(.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS N - STYLE CFR06 CAPACITORS								
Type designation 5/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.062(1.57)	H ±.062(1.57)	L +.094(2.39) -.062(1.57)	L.S. ±.030(.76)	M 2/ axial and radial
	µF	volts, dc						
CFR06-NC103--	.010	200	G,J,K	.125(3.18)	.187(4.75)	.418(10.62)	.438(11.13)	.020(.51)
CFR06-NC123--	.012	200		.140(3.56)	.203(5.16)	.418	.438(11.13)	.020(.51)
CFR06-NC153--	.015	200		.140(3.56)	.218(5.54)	.418	.438(11.13)	.020(.51)
CFR06-NC183--	.018	200		.156(3.96)	.234(6.94)	.418	.438(11.13)	.020(.51)
CFR06-NC223--	.022	200		.171(4.34)	.250(6.35)	.418	.438(11.13)	.020(.51)
CFR06-NC273--	.027	200		.187(4.75)	.250(6.35)	.418	.438(11.13)	.020(.51)
CFR06-NC333--	.033	200		.187(4.75)	.265(6.73)	.418(10.62)	.438(11.13)	.020(.51)
CFR06-NC393--	.039	200		.140(3.56)	.250(6.35)	.542(13.77)	.562(14.27)	.020(.51)
CFR06-NC473--	.047	200		.156(3.96)	.265(6.73)	.542	.562(14.27)	.020(.51)
CFR06-NC563--	.056	200		.171(4.34)	.281(7.14)	.542	.562(14.27)	.020(.51)
CFR06-NC683--	.068	200		.187(4.75)	.296(7.52)	.542	.562(14.27)	.020(.51)
CFR06-NC823--	.082	200		.203(5.16)	.312(7.92)	.542(13.77)	.562(14.27)	.020(.51)
CFR06-NC104--	.10	200		.218(5.54)	.328(8.33)	.538(13.67)	.562(14.27)	.025(.64)
CFR06-NC124--	.12	200		.250(6.35)	.359(9.12)	.538(13.67)	.562(14.27)	.025(.64)
CFR06-NC154--	.15	200		.265(6.73)	.390(9.91)	.538(13.67)	.562(14.27)	.025(.64)
CFR06-NC184--	.18	200		.218(5.54)	.343(8.71)	.663(16.84)	.688(17.48)	.025(.64)
CFR06-NC224--	.22	200		.234(5.94)	.375(9.53)	.663(16.84)	.688(17.48)	.025(.64)
CFR06-NC274--	.27	200		.265(6.73)	.421(10.69)	.663(16.84)	.688(17.48)	.025(.64)
CFR06-NC334--	.33	200		.281(7.14)	.468(11.89)	.656(16.66)	.688(17.48)	.032(.81)
CFR06-NC394--	.39	200		.312(7.92)	.484(12.29)	.656(16.66)	.688(17.48)	.032(.81)
CFR06-NC474--	.47	200		.343(8.71)	.515(13.08)	.656(16.66)	.688(17.48)	.032(.81)
CFR06-NC564--	.56	200		.312(7.92)	.484(12.29)	.906(23.01)	.938(23.83)	.032(.81)
CFR06-NC684--	.68	200		.328(8.33)	.515(13.08)	.906	.938(23.83)	.032(.81)
CFR06-NC824--	.82	200		.359(9.12)	.562(14.27)	.906	.938(23.83)	.032(.81)
CFR06-NC105--	1.00	200		.390(9.91)	.578(14.68)	.906(23.01)	.938(23.83)	.032(.81)
CFR06-NC125--	1.20	200		.375(9.53)	.531(13.49)	1.218(30.94)	1.250(31.75)	.032(.81)
CFR06-NC155--	1.50	200		.406(10.31)	.578(14.68)	1.218	1.250(31.75)	.032(.81)
CFR06-NC185--	1.80	200		.406(10.31)	.656(16.66)	1.218	1.250(31.75)	.032(.81)
CFR06-NC225--	2.20	200		.406(10.31)	.718(18.24)	1.218(30.94)	1.250(31.75)	.032(.81)
CFR06-NC335--	3.30	200		.453(11.51)	.765(19.43)	1.468(37.29)	1.500(38.10)	.032(.81)
CFR06-NC395--	3.90	200		.500(12.70)	.890(22.61)	1.468(37.29)	1.500(38.10)	.032(.81)
CFR06-NC475--	4.70	200		.575(14.61)	.906(23.01)	1.718(43.64)	1.750(44.45)	.032(.81)
CFR06-NC106--	10.00	200	G,J,K	.750(19.05)	1.203(30.56)	1.872(47.55)	1.812(46.02)	.040(1.02)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTIC N - STYLE CFR06 CAPACITORS								
Type designation 5/	Capacitance (nom)	Rated voltage (at 85°C)	Capacitance tolerance available	Dimensions (in inches)				
				T ±.062(1.57)	H ±.062(1.57)	L ±.094(2.39) -.062(1.57)	L.S. ±.030(.76)	M 2/ axial and radial
	µF	volts, dc						
CFR06-NE103--	.010	400	G,J,K	.140(3.56)	.265(6.73)	.668(17.48)	.688(17.48)	.020(.51)
CFR06-NE123--	.023	400		.156(3.96)	.281(7.14)	.668	.688(17.48)	.020(.51)
CFR06-NE153--	.015	400		.171(4.34)	.296(7.52)	.668	.688(17.48)	.020(.51)
CFR06-NE183--	.018	400		.187(4.75)	.312(7.92)	.668	.688(17.48)	.020(.51)
CFR06-NE223--	.022	400		.203(5.16)	.312(7.92)	.668(17.48)	.688(17.48)	.020(.51)
CFR06-NE273--	.027	400		.234(5.94)	.343(8.71)	.663(16.84)	.688(17.48)	.025(.64)
CFR06-NE333--	.033	400		.250(6.35)	.375(9.53)	.663(16.84)	.688(17.48)	.025(.64)
CFR06-NE393--	.039	400		.218(5.84)	.296(7.52)	.913(23.19)	.938(23.83)	.025(.64)
CFR06-NE473--	.047	400		.218(5.54)	.328(8.33)	.913	.938(23.83)	.025(.64)
CFR06-NE563--	.056	400		.234(5.94)	.375(9.53)	.913	.938(23.83)	.025(.64)
CFR06-NE683--	.068	400		.234(5.94)	.421(10.69)	.913	.938(23.83)	.025(.64)
CFR06-NE823--	.082	400		.265(6.73)	.453(11.51)	.913(23.19)	.938(23.83)	.025(.64)
CFR06-NE104--	.10	400		.296(7.52)	.484(12.29)	.906(23.01)	.938(23.83)	.032(.81)
CFR06-NE124--	.12	400		.312(7.92)	.531(13.94)	.906(23.01)	.938(23.83)	.032(.81)
CFR06-NE154--	.15	400		.343(8.71)	.562(14.27)	.906(23.01)	.938(23.83)	.032(.81)
CFR06-NE184--	.18	400		.281(7.14)	.531(13.49)	1.218(30.94)	1.250(31.75)	.032(.81)
CFR06-NE224--	.22	400		.296(7.52)	.562(14.27)	1.218(30.94)	1.250(31.75)	.032(.81)
CFR06-NE274--	.27	400		.343(8.71)	.546(13.87)	1.468(37.29)	1.500(38.10)	.032(.81)
CFR06-NE334--	.33	400		.359(9.12)	.593(15.06)	1.468	1.500(38.10)	.032(.81)
CFR06-NE394--	.39	400		.390(9.91)	.671(17.04)	1.468	1.500(38.10)	.032(.81)
CFR06-NE474--	.47	400		.406(10.31)	.718(18.24)	1.468	1.500(38.10)	.032(.81)
CFR06-NE564--	.56	400		.406(10.31)	.812(20.62)	1.468	1.500(38.10)	.032(.81)
CFR06-NE684--	.68	400		.421(10.69)	.890(22.61)	1.468(37.29)	1.500(38.10)	.032(.81)
CFR06-NE824--	.82	400		.500(12.70)	.781(19.84)	1.718(43.64)	1.750(44.45)	.032(.81)
CFR06-NE105--	1.00	400		.515(13.08)	.875(22.23)	1.718(43.64)	1.750(44.45)	.032(.81)
CFR06-NE125--	1.20	400		.546(13.87)	1.000(25.40)	1.718(43.64)	1.750(44.45)	.032(.81)
CFR06-NE155--	1.50	400		.562(14.27)	1.125(28.58)	1.710(43.43)	1.750(44.45)	.040(1.02)
CFR06-NE185--	1.80	400		.671(17.04)	1.125(28.58)	1.710	1.750(44.45)	.040(1.02)
CFR06-NE225--	2.20	400		.765(19.43)	1.125(28.58)	1.710	1.750(44.45)	.040(1.02)
CFR06-NE335--	3.30	400	G,J,K	.875(22.23)	1.406(35.71)	1.710(43.43)	1.750(44.45)	.040(1.02)

See footnotes next page.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

1/ The complete type designation will include additional symbols to indicate characteristic, capacitance tolerance and failure rate level.

2/ Tolerances are ±.002 on .040 (No. 18 AWG) inch-diameter; $^{+.005}_{-.003}$ on .032 (No. 20 AWG) and .025 (No. 22 AWG) inch-diameters; and $^{+.004}_{-.001}$ on .020 (No. 24 AWG) and .016 (No. 26 AWG) inch-diameters.

3/ Tolerances for dimension "D" are ±.031 (0.250 inch-diameter and below); ±.046 (0.251 through 0.499 inch-diameter); and ±.062 (0.500 inch-diameter and above).

4/ The complete type designation will include additional symbols to indicate terminal type, characteristic, capacitance tolerance and failure rate level.

5/ The complete type designation will include additional symbols to indicate terminal type (for style CFR06), capacitance tolerance and failure rate level (M, P, R, or S).

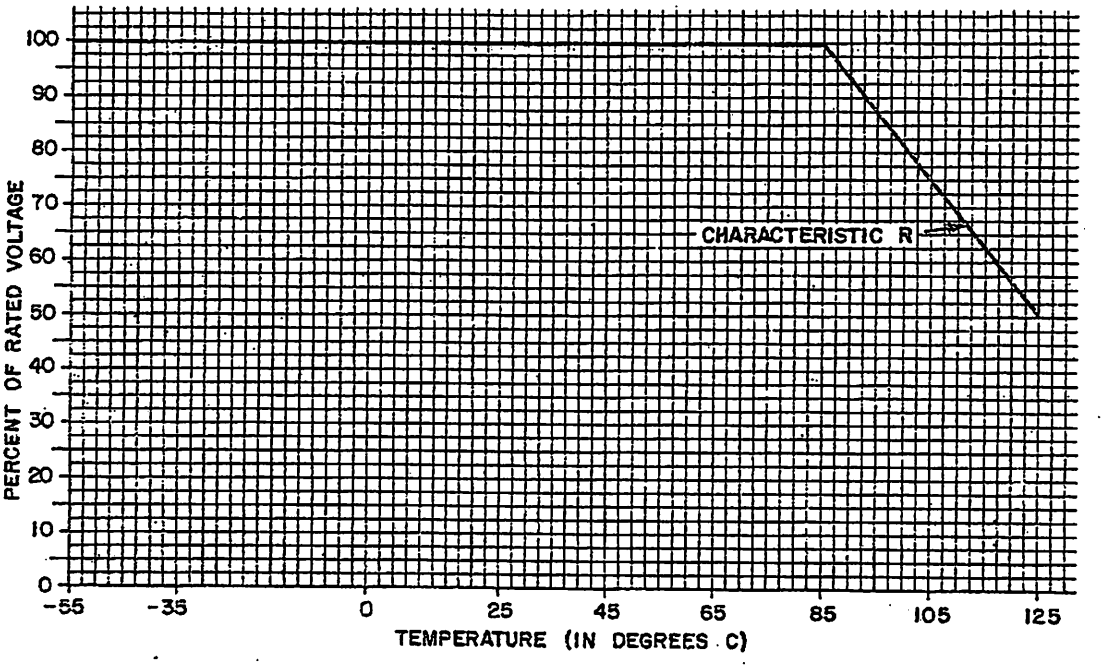


FIGURE 3. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:29Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and construction:
Dimension and configuration - See figures 1 and 2 and table I.
Terminals - Axial wire-lead (A) or radial wire-lead (R), as shown in table I.
Characteristic - N, R, or T as shown in table I.
Rated voltage - 50 V(A), 100 V(B), 200 V(C), or 400 V(E), as shown in table I. When properly voltage derated (see figure 3), characteristic R capacitors will operate to 125°C.
Capacitance (nom) - See table I.
Capacitance tolerance - ±1% (F), ±2%(G), ±5%(J), ±10%(K), as shown in table I.

Failure rate level - M, P, R, or S.

Vibration, high frequency (direction and duration of motion, R-type terminals) - Three mutually perpendicular directions, perpendicular to the width, length, and thickness; 3 hours in each direction.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1289-1)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.