MILITARY STANDARD

MIL-STD-1320-271

(NAVY)

7 JANUARY 1993

TRUCKLOADING


TACTICAL AIR LAUNCHED DECOY (TALD) ADM-141 IN CONTAINER CNU-536/E

CONTAINER DATA


DIMENSIONS----------L=111 W=35 H=25.68
STACKING HEIGHT----------25.18
TARE WEIGHT----------500.6 LBS △
GROSS WEIGHT----------1320 LBS △
CUBE----------112.10 CU FT
UNIT LOAD DOCUMNET----------MIL-STD-1323-381

FOR HAZARD CLASSIFICATIONS SEE NAVSEA OP 2165

△ DO NOT USE FOR SHIPPING WEIGHT



SHIPPING AND STORAGE CONTAINER CNU-536/E

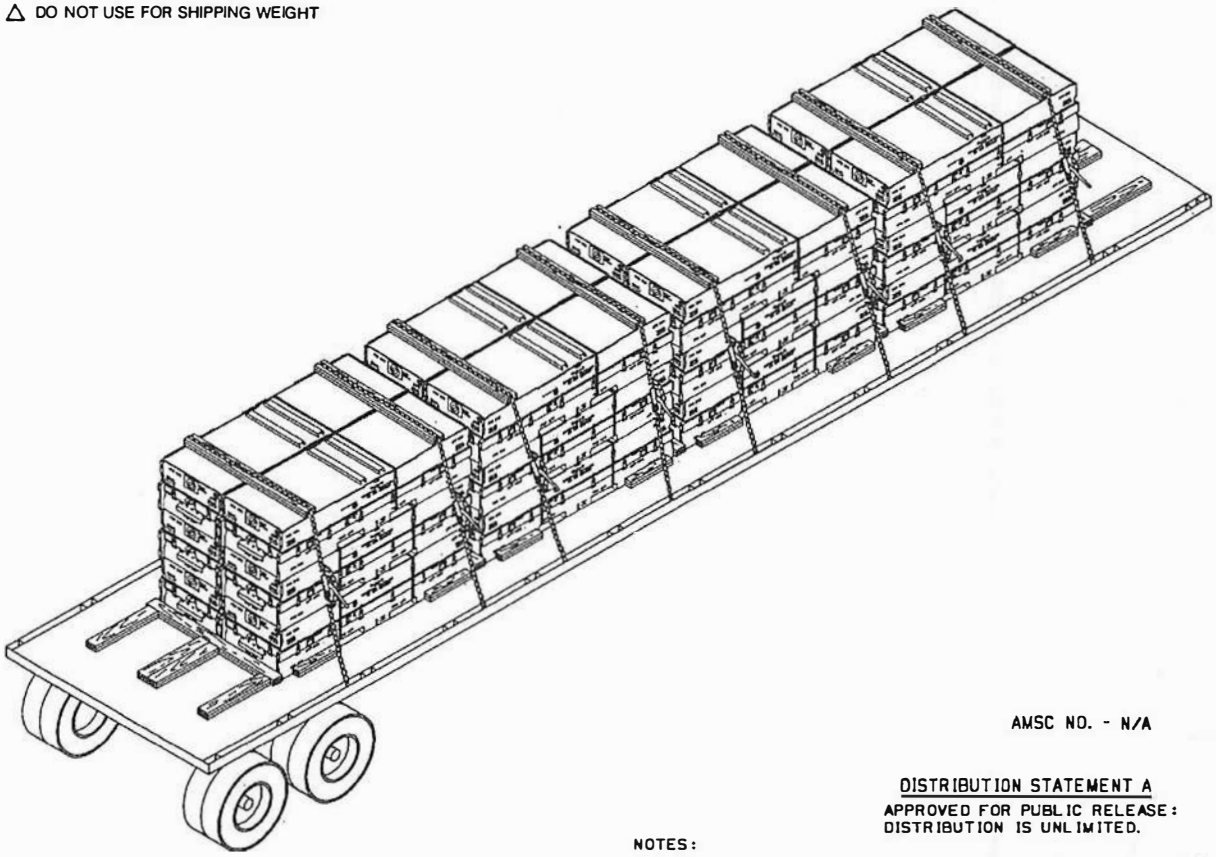

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TOA / APPROVAL	SYSCOM

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

L. Ruiola — 12/16/92
SIGNATURE — TOA, WPNSTA EARLE — DATE

LR Quiggle — 1/7/93
SIGNATURE — AIRSYSCOM BY DIRECTION — DATE

ORIGINATOR — A Binder — 92-12-16 DATE

WPNSTA EARLE. NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:50Z
Check the source to verify that this is the current version before use.


GENERAL NOTES:

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE ADM-141 TACTICAL AIR LAUNCHED DECOY (TALD) IN THE SHIPPING AND STORAGE CONTAINER CNU-536/E.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT OR LONGER FLATBED TRAILERS. DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE SECURED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. THE MAXIMUM NUMBER OF CONTAINERS THAT CAN BE LOADED ONTO A TRAILER IS:

   40 THRU 45 FT TRAILERS - 18 CONTAINERS
   48 FT TRAILERS - 24 CONTAINERS


8. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
9. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
10. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS AND THE PROTECTOR BOARDS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:50Z
Check the source to verify that this is the current version before use.

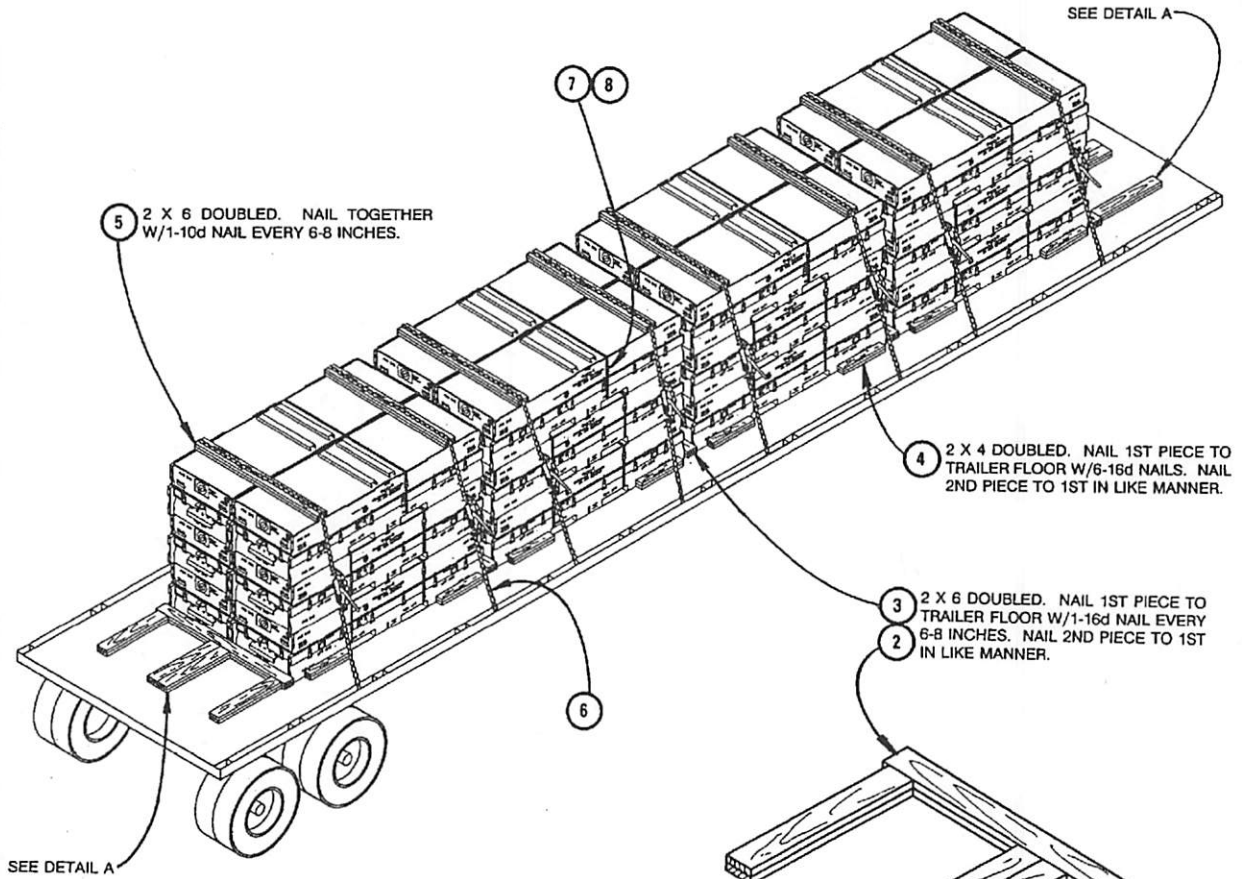

NOTE

STABILIZING STRAP, ITEM 7, SHALL PASS THROUGH THE FORK POCKETS OF BOTH TOP LAYER CONTAINERS AND OVER THE TOP OF CONTAINERS OF AS SHOWN. THIS STRAP IS ONLY NECESSARY WHEN CONTAINERS ARE STACKED THREE HIGH.

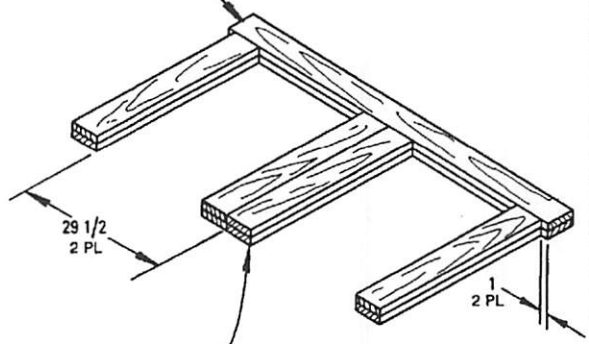

DETAIL A

FRONT AND REAR BLOCKING ASSEMBLY

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS.


REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AR	8	STRAP SEAL	STEEL	1 1/4" SIZE
4	7	STABILIZING STRAP	STEEL	1 1/4 X .035 X 17 FT
8	6	CHAIN & LOADBINDER	STEEL	
16	5	PROTECTOR BOARD	WOOD	2 X 6 X 70
32	4	SLEEPER	WOOD	2 X 4 X 24
6	3	CROSSMEMBER	WOOD	2 X 6 X 72
2	2	CROSSMEMBER	DETAIL A	2 X 6 X 72
16	1	BACKUP CLEAT	DETAIL A	2 X 6 X 36

LIST OF MATERIALS PAGE 3

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:50Z
Check the source to verify that this is the current version before use.

LESS THAN FULL LOAD NOTES:


1. A SINGLE STACK MAY CONSIST OF ONE, TWO, FOUR, OR SIX CONTAINERS.
2. BLOCKING FOR THE INTERFACE BETWEEN A 2-WIDE STACK AND A 1-WIDE STACK SHALL BE AS SHOWN IN DETAIL B.
3. END BLOCKING FOR 1-WIDE STACKS OF CONTAINERS SHALL BE AS SHOWN IN DETAIL C.

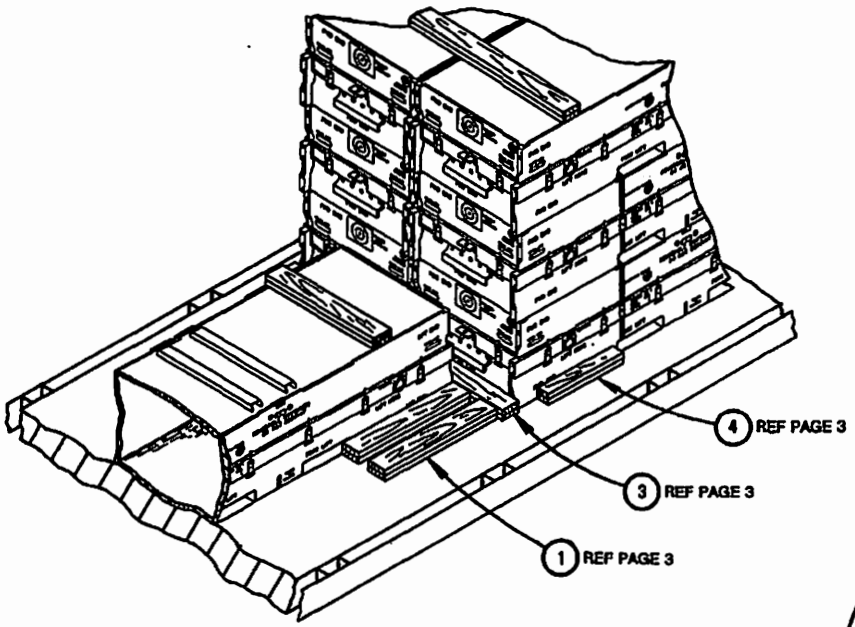

DETAIL B

BLOCKING FOR INTERFACE BETWEEN 2-WIDE AND 1-WIDE STACK

CHAINS & LOADBINDERS OMITTED

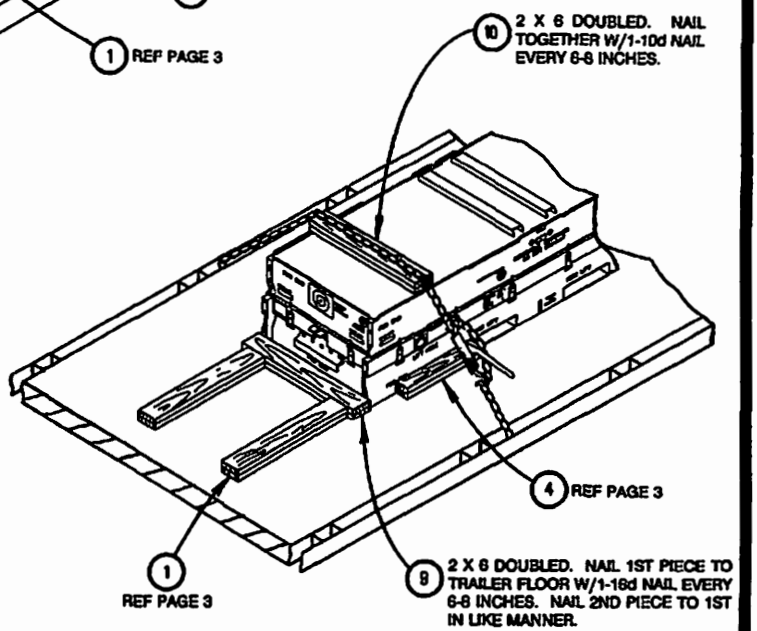

DETAIL C

END BLOCKING AND PROTECTOR BOARD FOR 1-WIDE STACK


REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	10	PROTECTOR BOARD	DETAIL C	2 X 6 X 35
2	9	CROSSMEMBER	DETAIL C	2 X 6 X 37

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:50Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. USING A FORKLIFT TRUCK, CAREFULLY STACK ONE CONTAINER ON TOP OF A TWO-CONTAINER UNIT LOAD. BE SURE TO ALIGN THE STACKING FEATURES. THE TWO CONTAINER UNIT LOAD SHALL HAVE BEEN UNITIZED IN ACCORDANCE WITH MIL-STD-1323-381 (NAVY).
2. THREAD TWO STEEL STRAPS, ITEM 11, THROUGH THE FORK POCKETS OF THE UPPER TWO CONTAINERS AS SHOWN BELOW. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 8.

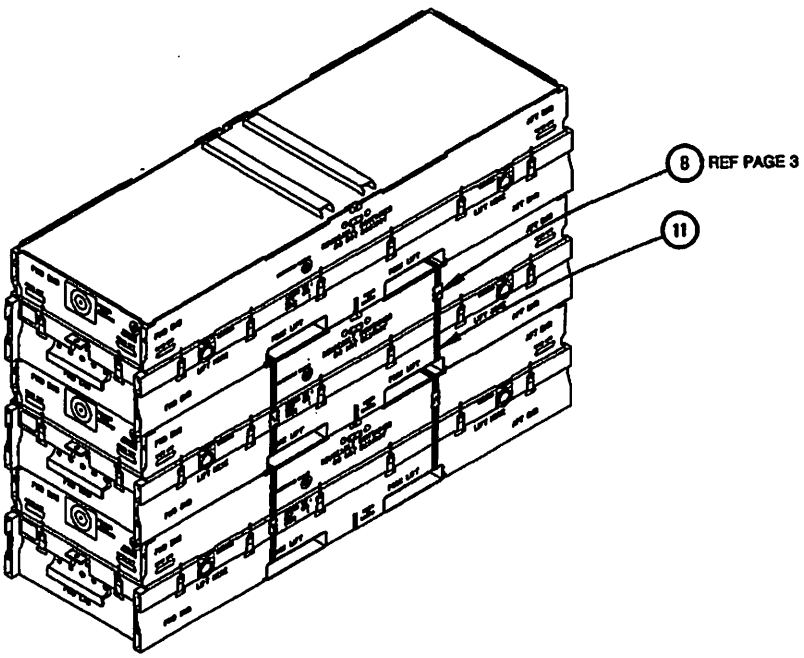

DEUNITIZING PROCEDURE

1. CUT AND REMOVE THE STRAPPING, ITEM 11, WHICH HOLDS THE TOP CONTAINER TO THE LOWER TWO CONTAINERS.
2. REMOVE TOP CONTAINER.

NOTE

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS THREE (3) HIGH IS AUTHORIZED FOR THE LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE UNIT LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

AR	11	UNITIZING STRAP	STEEL	1 1/4 X .035 X 11 1/2 FT
REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:50Z
Check the source to verify that this is the current version before use.